

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

- Exam Winter Semester 2022** 2
- Additional permitted Aids 2
- Hits 2
- Only EEE1-relevant Part 2
- Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) 2
- Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 3
- Exercise E2 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) 3
- Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 5
- Full Exam 9
- Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) 9
- Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 10
- Exercise E2 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) 10
- Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 12
- Exercise E1 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) 16
- Exercise E4 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) 17
- Exercise E1 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) 17
- Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) 18

Exam Winter Semester 2022

Additional permitted Aids

- non-programmable calculator,
- formulary (2 DIN A4 pages)

Hits

- The duration of the exam is 60 min.
- Attempts to cheat will lead to exclusion and failure of the exam.
- Withdrawal is no longer possible after these exam has been handed out.
- Please write down intermediate calculations and results on the assignment sheet. (when more space is needed also on the reverse side. In this case: Mark it clearly).
- Always use units in the calculation.
- Use a document-proof, non-red pen.

Only EEE1-relevant Part

This part is only for about 25 minutes !

Exercise E1 Resistance of a Wire by Resistivity

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. Heating elements are used to heat wire with a temperature of 180°C . An electric power dissipation (= heat flow) of $P=40\text{ W}$ is necessary.

Determine the current I needed to operate for heating elements.

The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6}\ \Omega\text{m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .

∴ Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \\ &= \sqrt{\frac{P}{R}} = \sqrt{\frac{40\text{ W}}{0.33\ \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \text{with } A = r^2 \cdot \pi = \\ &= \frac{1}{4} d^2 \cdot \pi \quad \text{and } R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \text{and } R = \\ &= 1.10 \cdot 10^{-6}\ \Omega\text{m} \cdot \frac{4 \cdot 3\text{ m}}{(3.57 \cdot 10^{-3}\text{ m})^2 \cdot \pi} \end{aligned}$$

Exercise E1 Temperature-dependent Resistance
(written test, approx. 6 % of a 60-minute written test, WS2022)

2. A refrigerator, which has a temperature coefficient of resistance α and a temperature coefficient of resistance β has a resistance of R_0 at T_0 . Calculate the resistance of the thermistor at T_1 .

Its temperature coefficients are: $\alpha = 0.01 \cdot 10^{-6} \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

The temperature inside the refrigeration system can reach down to $T_1 = -40 \text{ °C}$.

Calculate the resistance of the thermistor at T_1 .

The power transfered to the load is $P = U^2 / R$. Therefore, a solution is to increase the resistance of the thermistor.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

$$R = 10 \cdot \Omega \cdot (1 + 0.01 \cdot 10^{-6} \cdot (-40 - 25) + 71 \cdot 10^{-6} \cdot (-40 - 25)^2)$$

Exercise E2 Pure Resistor Network Simplification
(written test, approx. 13 % of a 60-minute written test, WS2022)


The following shall be solved: $R_1 = 20 \text{ } \Omega$, $R_2 = 10 \text{ } \Omega$, $R_3 = 15 \text{ } \Omega$, $R_4 = 10 \text{ } \Omega$, $R_5 = 10 \text{ } \Omega$ and the voltage $U = 10 \text{ V}$.

Calculate the current I through the resistor R_3 .

Solution

$$R_{\text{eq}} = 132.8 \text{ } \Omega$$

Now a wye-delta transformation is necessary.

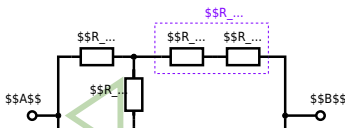


Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:
$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{eq} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B.

Solution

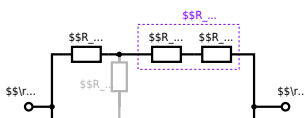


The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_{-1}) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$

**Exercise E3 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result


$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

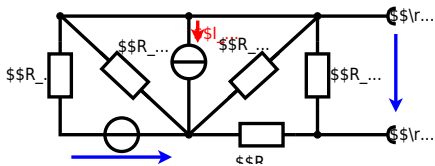


Calculated the internal resistance R_{i} and the source voltage U_{s} of an equivalent linear voltage source on the connectors A and B . $R_1=5.0 \Omega$, $U_2=6.0 \text{ V}$, $R_3= 10 \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \Omega$, $R_6=7.5 \Omega$, $R_7=15 \Omega$ Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

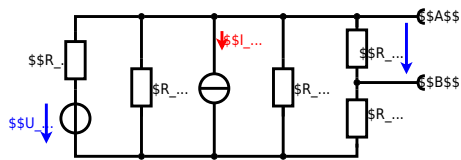

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

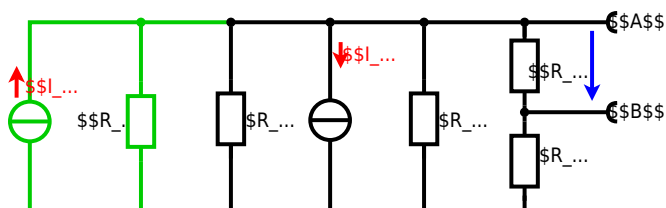

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :
$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$
 The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:
$$U_{24}$$

$$I = R_{135} \cdot I_{24} \quad I = \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 \parallel R_3 \parallel R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \left\{ \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} \right\} = \left(\frac{U_2}{R_1} - I_4 \right) \cdot \left\{ \frac{R_7 \cdot R_1 \parallel R_3 \parallel R_5}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} \right\}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$

with $R_1 \parallel R_3 \parallel R_5 = 5\Omega \parallel 10\Omega \parallel 10\Omega = 5\Omega \parallel 5\Omega = 2.5\Omega$:

$$U_{AB} = \left(\frac{6.0\text{V}}{5.0\Omega} - 4.2\Omega \right) \cdot \left\{ \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \right\} \quad R_{AB} = 15\Omega \parallel (7.5\Omega + 2.5\Omega)$$

Full Exam

These is the full exam

Full exam

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

The heating element made of nichrome wire with a cross-section of 1.80 mm^2 . Each second, a power dissipation (= heat flow) of $P=40\text{ W}$ is necessary. Determine the current I needed to operate for heating elements. The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6}\Omega\text{ m}$. The heating element is 3 m long and has a diameter of 3.57 mm . Calculate the resistance R of the heating element.

Solution

$$P = U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40\text{ W}}{0.33\Omega}}$$

$$R = \rho \cdot \frac{l}{A} \quad | \quad \text{with } A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad R = 1.10 \cdot 10^{-6}\Omega\text{ m} \cdot \frac{4 \cdot 3\text{ m}}{d^2 \cdot \pi}$$

$$3 \cdot 10^{-3} \cdot (3.57 \cdot 10^{-3} \cdot R)^2 \cdot \pi$$

[electrical_engineering_and_electronics:task_rj0r6j4apumukrj6_with_calculation](#)
[resistivity, power, exam ee1 ws2022](#)

Exercise E1 Temperature-dependent Resistance
(written test, approx. 6 % of a 60-minute written test, WS2022)

A refrigerator is explained with the effect of temperature on the resistance of a resistor. The resistor has a resistance of $10 \text{ } \Omega$ at $25 \text{ } ^\circ\text{C}$. Its temperature coefficients are: $\alpha = 0.01 \text{ } \text{K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ } \text{K}^{-2}$.

The temperature inside the refrigeration system can reach down to $-40 \text{ } ^\circ\text{C}$.

Result
 Calculate the resistance of the thermistor at $-40 \text{ } ^\circ\text{C}$.

The power transferred to the resistor and generated heat is $P = I^2 R$. The current is constant. Therefore, with constant I and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

$$R = 10 \cdot (1 + 0.01 \cdot (-40 - 25) + 71 \cdot 10^{-6} \cdot (-40 - 25)^2)$$

[electrical_engineering_and_electronics:task_70jg4yzznocarsq_with_calculation](#)
[temperature dependent resistance, power, heat, exam ee1 ws2022](#)


Exercise E2 Pure Resistor Network Simplification
(written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall hold: $R_1 = 10 \text{ } \Omega$, $R_2 = 10 \text{ } \Omega$, $R_3 = 10 \text{ } \Omega$, $R_4 = 10 \text{ } \Omega$, $R_5 = 10 \text{ } \Omega$, $R_6 = 10 \text{ } \Omega$, $R_7 = 10 \text{ } \Omega$, $R_8 = 10 \text{ } \Omega$, $R_9 = 10 \text{ } \Omega$, $R_{10} = 10 \text{ } \Omega$, $R_{11} = 10 \text{ } \Omega$, $R_{12} = 10 \text{ } \Omega$, $R_{13} = 10 \text{ } \Omega$, $R_{14} = 10 \text{ } \Omega$, $R_{15} = 10 \text{ } \Omega$, $R_{16} = 10 \text{ } \Omega$, $R_{17} = 10 \text{ } \Omega$, $R_{18} = 10 \text{ } \Omega$, $R_{19} = 10 \text{ } \Omega$, $R_{20} = 10 \text{ } \Omega$.

Solution

$$R_{\text{eq}} = 132.8 \text{ } \Omega$$

 Now a wye-delta transformation is necessary.

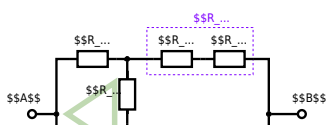


Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:
$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{eq} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution



The equivalent resistor is given by a parallel configuration of resistors in series:


$$R_{\text{eq}} = (R_2 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega}$$

[electrical_engineering_and_electronics:task_x357drkaqv84jnsc_with_calculation_network_simplification,_exam_ee1_ws2022](#)

**Exercise E3 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result

$$U_{\text{S}} = U_{\text{AB}} = 4.5 \text{ V} \parallel R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

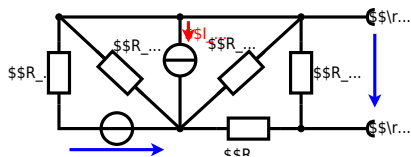


Calculated the internal resistance R_i and the source voltage U_s of an equivalent linear voltage source on the connectors A and B.

$R_1=5.0 \Omega$, $U_2=6.0 \text{ V}$, $R_3= 10 \Omega$, $I_4=4.2 \text{ A}$,
 $R_5=10 \Omega$, $R_6=7.5 \Omega$, $R_7=15 \Omega$


Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

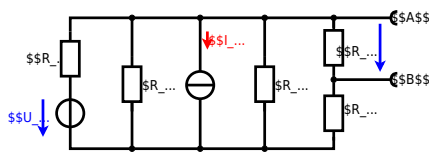


The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

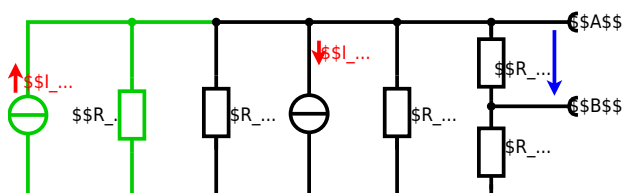

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in

parallel, like also I_2 and I_4 :
$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \left\{ \frac{U_2}{R_1} \right\} - I_4$$
 The resulting circuit can again be transformed:

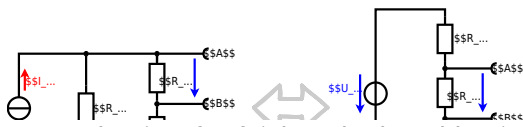

Here, the U_{24} is calculated by I_{24} as the following:
$$U_{24} = R_{135} \cdot I_{24} = \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:
$$U_{\text{AB}} = U_{24} \cdot \left\{ \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right\} = \left(\frac{U_2}{R_1} - I_4 \right) \cdot \left\{ \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5} \right\}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):
$$R_{\text{AB}} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{\text{AB}} = \left\{ \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \Omega \right\} \cdot \left\{ \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right\}$$

$$R_{\text{AB}} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$


[electrical_engineering_and_electronics:task_6tqtqtue1e2nf2c7_with_calculation](#)
 dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1
 ws2022

Exercise E1 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)

The capacitor becomes fully charged (voltage across the capacitor is U) again. The voltage across the capacitor is again 0 V at the moment $t_0=0$ s when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2=1$ ms after closing the switch.

Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_B .

The internal voltage of the equivalent source is $U \cdot \frac{R_B}{R_1 + R_B}$ and the internal resistance is $R_1 \parallel R_B$. The voltage across the capacitor is $u_c(t) = U \cdot \frac{R_B}{R_1 + R_B} (1 - e^{-t/(R_1 \parallel R_B) \cdot C})$. On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

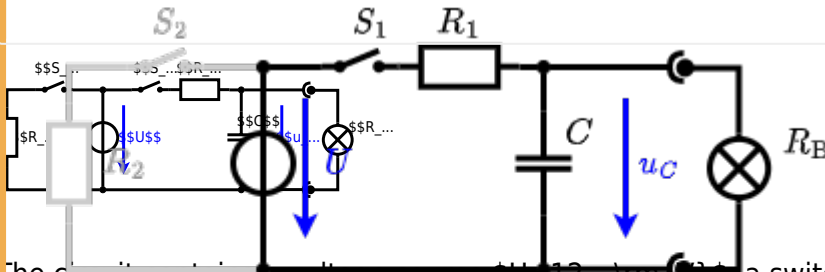


The circuit contains a voltage source $U=12$ V, a switch S_1 , a resistor of $R_1=20$ Ohm and a capacitor of $C=100$ uF.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0=0$ s the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0)=0$ V.

First do not consider the light bulb - it is not connected to the RC circuit.

Calculate the point of time t_1 when $u_c(t_1)=0.5 \cdot U$.

Solution

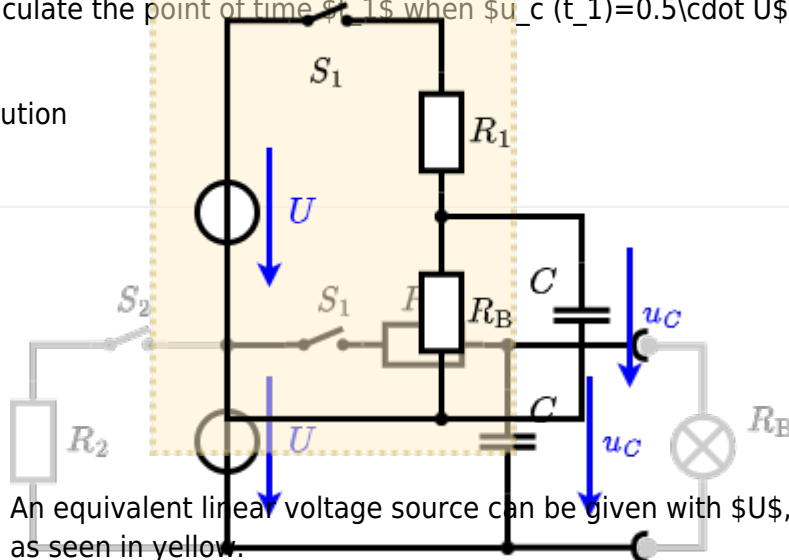

An equivalent linear voltage source can be given with U , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent source is $U_{eq} = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$. The internal resistance is given by $R_{int} = R_1 \parallel R_B = 10$ Ohm.

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t) = U_{eq} (1 - e^{-t/(R_{int} \cdot C)})$. It has to be rearranged to $(1 - e^{-t/(10 \cdot 10^{-4})}) = 0.5 \cdot U$. $1 - e^{-t/0.001} = 0.5$ $e^{-t/0.001} = 0.5$ $t/0.001 = \ln(0.5)$ $t = 0.001 \cdot \ln(0.5) \cdot (-1) = 0.000693$ s = 0.693 ms.

$$\frac{1}{2} \cdot U \cdot (1 - e^{-\frac{1}{\tau}}) \cdot \mu F$$

electrical_engineering_and_electronics:task_tb6pi8dgh0m2e2pw_with_calculation charging capacitors, dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1 ws2022

Exercise E4 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the physical values of the two components. (\$R\$ and \$\underline{X}_1\$) shall be given.

After analysis, the following information can be extracted and brought into phase: $\underline{Z} = \frac{1}{\omega} \left(\frac{2}{\omega} \cos(\varphi) + 5 \right) + j \left(\frac{2}{\omega} \sin(\varphi) + 5 \right)$

.. Calculate the physical values of the two components.

Solution

$$\underline{Z} = \frac{1}{\omega} \left(\frac{2}{\omega} \cos(\varphi) + 5 \right) + j \left(\frac{2}{\omega} \sin(\varphi) + 5 \right)$$

Solution

$$\underline{U} = \underline{Z} \cdot \underline{I} \Rightarrow \underline{U} = \left(\frac{2}{\omega} \cos(\varphi) + 5 \right) \cdot \underline{I} + j \left(\frac{2}{\omega} \sin(\varphi) + 5 \right) \cdot \underline{I}$$

The real and imaginary parts of the voltage and current are in phase. Therefore, the real and imaginary parts of the voltage and current must be in phase. This leads to the following equations:

$$\frac{50}{\sqrt{2}} \cos(\varphi) = \left(\frac{2}{\omega} \cos(\varphi) + 5 \right) \cdot \frac{50}{\sqrt{2}} \cos(\varphi) + \left(\frac{2}{\omega} \sin(\varphi) + 5 \right) \cdot \frac{50}{\sqrt{2}} \sin(\varphi)$$

$$\frac{50}{\sqrt{2}} \sin(\varphi) = \left(\frac{2}{\omega} \cos(\varphi) + 5 \right) \cdot \frac{50}{\sqrt{2}} \sin(\varphi) + \left(\frac{2}{\omega} \sin(\varphi) + 5 \right) \cdot \frac{50}{\sqrt{2}} \cos(\varphi)$$

With the complex part comes the physical value:

$$\underline{X}_L = \frac{1}{\omega} \cdot \frac{2}{\omega} = \frac{2}{\omega^2}$$

The phase \$\varphi_i\$ can be calculated as:

$$\varphi_i = \arctan \left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})} \right) = \arctan \left(\frac{\frac{2}{\omega} \sin(\varphi) + 5}{\frac{2}{\omega} \cos(\varphi) + 5} \right)$$

electrical_engineering_and_electronics:task_jti0uzudcmg4u22t_with_calculation complex impedance, exam ee1 ws2022

Exercise E1 Impedances at different Frequencies

(written test, approx. 18 % of a 60-minute written test, WS2022)

2. A series circuit contains a resistor with $R = 200 \Omega$ and a capacitor with $C = 40 \text{ nF}$. The voltage source is $v(t) = 300 \sin(2\pi \cdot 4000 t)$ V. The current through the resistor is $i(t) = 1.0 \cos(2\pi \cdot 4000 t)$ A. Determine the average power delivered to the resistor and the capacitor.

Solution

$$R = 200 \Omega$$

$$C = 40 \text{ nF}$$

A series circuit means that the current is constant on every component. The equivalent impedance for R and C combined is given by

$$Z = R - jX_C = 200 - j \frac{1}{2\pi \cdot 4000 \cdot 40 \cdot 10^{-9}} = 200 - j3.183 \Omega$$

Parallel circuit means that the voltage is the same on R and C

$$V_R = V_C = V = 300 \text{ V}$$

The average power delivered to the resistor is

$$P_R = I_{\text{eff}}^2 R = (1.0)^2 \cdot 200 = 200 \text{ W}$$

The average power delivered to the capacitor is

$$P_C = 0 \text{ W}$$

Therefore, the resulting current of the parallel circuit is given as:

$$I_{\text{eff}} = I_R + I_C$$

This can be read as $I_{\text{eff}} = \sqrt{I_R^2 + I_C^2}$

Back to the first formula:

$$R \cdot I_{\text{eff}} = X_C \cdot I_{\text{eff}}$$

$$R \cdot I_{\text{eff}} = \frac{V}{2\pi \cdot f \cdot C} \cdot I_{\text{eff}}$$

$$I_{\text{eff}} = \frac{V}{R + \frac{1}{2\pi \cdot f \cdot C}}$$

[electrical_engineering_and_electronics:task_pdkgtyexxy1ktu3_with_calculation](#)
[complex impedance, exam ee1 ws2022](#)

Exercise E1 Complex Impedance Circuit

(written test, approx. 15 % of a 60-minute written test, WS2022)

1. Consider the circuit below. The voltage source is $v(t) = 300 \sin(2\pi \cdot 15000 t)$ V. The current through the resistor is $i(t) = 1.0 \cos(2\pi \cdot 15000 t)$ A. Determine the average power delivered to the resistor and the capacitor.

Solution

Result

$$Z = 19.8 - j48.2 \Omega$$

Draw the circuit diagram of the given circuit. Label the components, voltages, and currents.


$$Z = \frac{U}{I} = \frac{300}{1.0} = 300 \Omega$$

$$Z = R - jX_C = R - \frac{1}{2\pi \cdot f \cdot C} = 300 - \frac{1}{2\pi \cdot 15000 \cdot 0.22 \cdot 10^{-6}} = 19.8 - j48.2 \Omega$$

Result

$$P_R = I_{\text{eff}}^2 R = (1.0)^2 \cdot 19.8 = 19.8 \text{ W}$$

$$P_C = 0 \text{ W}$$

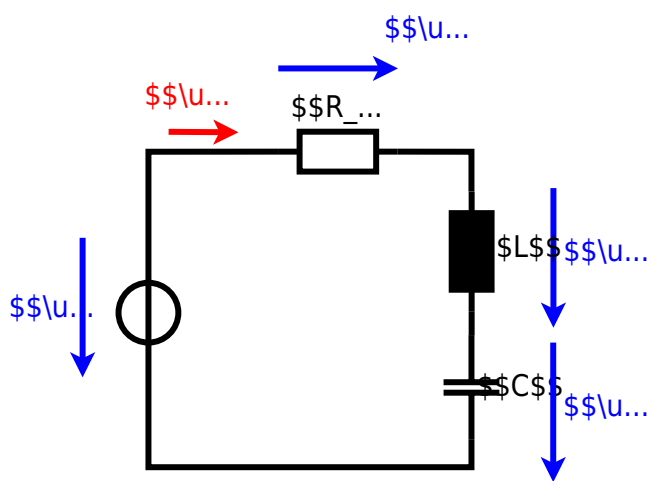

electrical_engineering_and_electronics:task_kricv9fh7haauo6q_with_calculation
complex impedance, exam ee1 ws2022

From:

<https://wiki.mexle.org/> - **MEXLE Wiki**

Permanent link:

https://wiki.mexle.org/electrical_engineering_and_electronics_1/ws2022_exam

Last update: **2026/01/12 00:24**

