

# task\_tb6pi8dgh0m2e2pw\_with\_calculation

## Student Group

First Name	Surname	Matrikel Nr.

## Table of Contents

Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) .....	2
--	---

Charging Capacitors, dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1 WS2022

**Exercise E4 Charging Capacitors**


(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the real solution) is in the picture. At  $t_0 = 0$  s the switch  $S_1$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1$  ms after closing the switch.

**Solution**  
 To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_B$ .

The voltage source is  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = 12 \cdot \frac{10}{20 + 10} = 4$  V. The internal resistance is  $R_{int} = R_1 \parallel R_B = 20 \parallel 10 = 6.67 \Omega$ .

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_1$ .

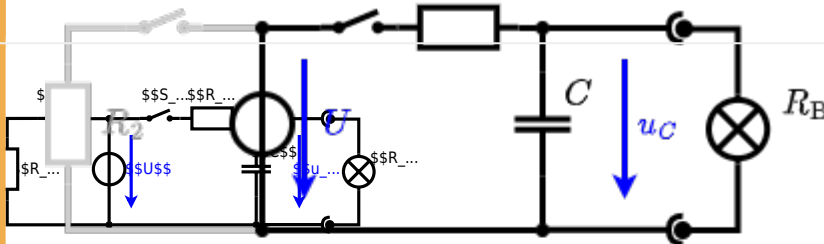


The circuit contains a voltage source  $U = 12$  V, a switch  $S_1$ , a resistor of  $R_1 = 20 \Omega$  and a capacitor of  $C = 100 \mu F$ .

The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first asks. At the moment  $t_0 = 0$  s the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0) = 0$  V.

First do not consider the light bulb - it is not connected to the RC circuit.

Calculate the point of time  $t_1$  when  $u_c(t_1) = 0.5 \cdot U$ .

**Solution**

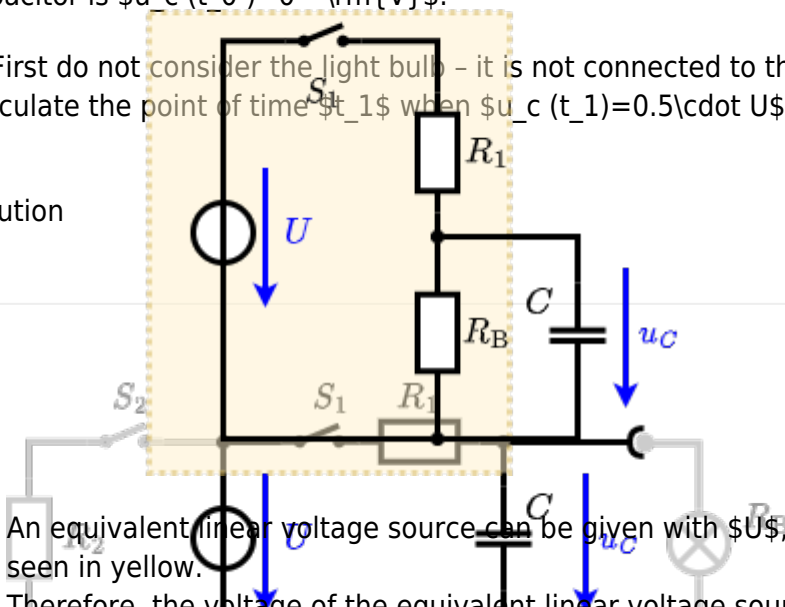

An equivalent linear voltage source can be given with  $U_s$ ,  $R_1$ , and  $R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$ . The internal resistance is given by substituting the ideal voltage source with its resistance ( $R_{int} = R_1 \parallel R_B = 6.67 \Omega$ , short-circuit).

$$R_1 = \frac{C}{\tau} \ln\left(\frac{1}{1 - 0.5}\right)$$

The following formula describes the time course of a substance with a half-life  $t_{1/2}$  and a decay constant  $\lambda$ . It has to be rearranged to  $t = \frac{1}{\lambda} \ln\left(\frac{1}{1 - 0.5}\right)$ . It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5$   $t/\tau = \ln(0.5)$   $t = \tau \cdot \ln(0.5)$

From:

<https://wiki.mexle.org/> - MEXLE Wiki

Permanent link:

[https://wiki.mexle.org/ee1/task\\_tb6pi8dgh0m2e2pw\\_with\\_calculation](https://wiki.mexle.org/ee1/task_tb6pi8dgh0m2e2pw_with_calculation)

Last update: **2023/04/02 00:43**

