

# ws2022\_exam\_r

## Student Group

First Name	Surname	Matrikel Nr.


## Table of Contents

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) .....	2
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) .....	5
Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) .....	6
Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) .....	6
Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) .....	9
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) .....	9
Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) .....	10
Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) .....	11

**Exercise E1 Equivalent linear Source**  
**(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.  
 Result

$$\begin{aligned} U_{\text{S}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} = 6 \Omega \end{aligned}$$

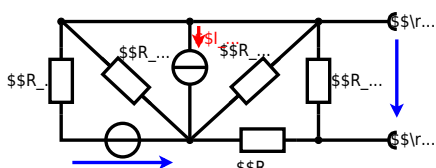


Calculated the internal resistance  $R_{\text{i}}$  and the source voltage  $U_{\text{S}}$  of an equivalent linear voltage source on the connectors  $\text{A}$  and  $\text{B}$ .  
 $R_1=5.0 \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3= 10 \Omega$ ,  $I_4=4.2 \text{ A}$ ,  $R_5=10 \Omega$ ,  $R_6=7.5 \Omega$ ,  $R_7=15 \Omega$  Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :

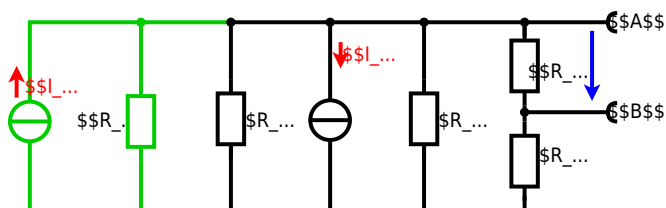

Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ : 
$$R_{135} = R_1 || R_3 || R_5$$
 
$$I_{24} = I_2 - I_4 = \frac{U_{24}}{R_1} - I_4$$
 The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following: 
$$U_{24}$$

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5}$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5}$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0 \Omega$ , so a short-circuit):

$$R_{1 || R_3 || R_5} = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$$

$$U_{AB} = \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \Omega \cdot \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega}$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

**Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)**

2. A refrigerator has a temperature sensitive resistor in its control circuit. The resistor has a resistance of  $10 \Omega$  at  $25^\circ\text{C}$ . Its temperature coefficients are:  $\alpha = 0.01 \text{ K}^{-1}$  and  $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$ .

Result: The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ . Calculate the resistance of the thermostat at  $-40^\circ\text{C}$ .

The power of the resistor is  $P = U^2 / R$ . Therefore, a solution is to use a heat pump. Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

$$R = 10 \Omega \cdot (1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2)$$

**Exercise E5 Analyzing complex Impedances**  
 (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the complex impedance  $Z$  of the circuit shown in the figure through the components.  $R$  and  $X_L$  shall be given.

After analysis, the full bridge network can be simplified and the voltage  $U$  in phase with the current  $I$  can be determined.

Solution  
 .. Calculate the physical values of the two components.  
 Solution  $R = 10 \Omega$  and  $X_L = 20 \Omega$

Solution  

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} \quad \underline{U} = 50 \text{ V}$$
 The voltage  $U$  is the effective value of the AC voltage  $u(t) = 50 \sqrt{2} \sin(\omega t)$  resulting in an effective value of  $U = 50 \text{ V}$ .  
 The impedance  $Z$  is the effective value of the AC voltage  $U$  divided by the effective value of the current  $I$ .  

$$\underline{Z} = \frac{\underline{U}}{\underline{I}} = \frac{50 \text{ V}}{1.92 \text{ A}} = 26.04 \Omega$$
 The phase angle  $\varphi$  can be calculated as  

$$\varphi = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right) = \arctan\left(\frac{-4.68}{0.24}\right) = -10.9^\circ$$
 With the complex part  $Z = 26.04 \Omega$  and  $\varphi = -10.9^\circ$   

$$\underline{Z} = 26.04 \Omega \cdot e^{-j10.9^\circ} = 25.5 \Omega - j4.68 \Omega$$
 The phase  $\varphi$  can be calculated as  $\varphi = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right) = \arctan\left(\frac{-4.68}{25.5}\right) = -10.9^\circ$

**Exercise E1 Complex Impedance Circuit**  
 (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the complex impedance  $Z$  of the circuit shown in the figure. The voltage  $U$  is the effective value of the AC voltage  $u(t) = 3.0 \sqrt{2} \sin(2\pi \cdot 15 \cdot t)$  and the current  $I$  is the effective value of the AC current  $i(t) = 0.22 \sqrt{2} \sin(2\pi \cdot 15 \cdot t)$ .

Solution  
 .. Draw the equivalent circuit diagram of the network.


Result  

$$\underline{Z} = \frac{\underline{U}}{\underline{I}} = \frac{3.0 \text{ V}}{0.22 \text{ A}} = 13.64 \Omega$$
 The phase angle  $\varphi$  can be calculated as  

$$\varphi = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right) = \arctan\left(\frac{1.92}{11.72}\right) = 9.3^\circ$$
 With the complex part  $Z = 13.64 \Omega$  and  $\varphi = 9.3^\circ$   

$$\underline{Z} = 13.64 \Omega \cdot e^{j9.3^\circ} = 13.2 \Omega + j2.1 \Omega$$



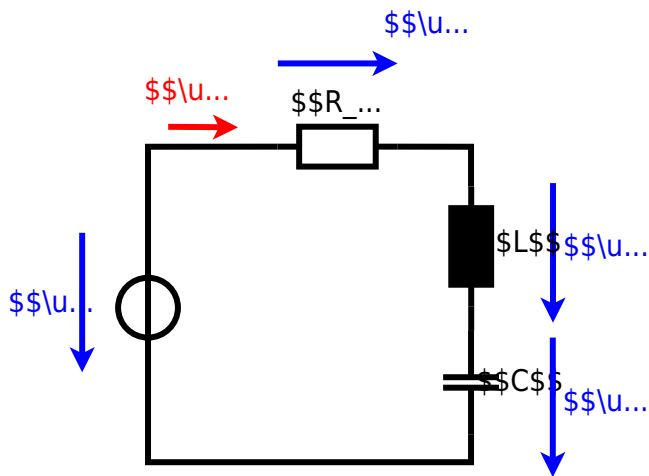

**Exercise E6 Impedances at different Frequencies**  
**(written test, approx. 18 % of a 60-minute written test, WS2022)**

2. A series circuit has three resistors with values  $R_1 = 1.00 \text{ k}\Omega$ ,  $R_2 = 10.0 \text{ k}\Omega$  and  $R_3 = 100 \text{ k}\Omega$ . A voltage source of  $U = 100 \text{ V}$  is connected in series with the resistors. The frequency of the voltage source is  $f = 4 \text{ MHz}$ . Calculate the absolute value of the impedance of the circuit.

Solution

A series circuit means that the current is constant on every component.

The equivalent impedance for  $R_1$  and  $R_2$  combined is given by  $Z_{12} = R_1 + R_2$ .

Parallel circuit means that the voltage is the same on  $R_1$  and  $R_2$ .  $\frac{1}{Z_{12}} = \frac{1}{R_1} + \frac{1}{R_2}$ .

Since  $Z_{12}$  and  $R_3$  are in series, the total impedance is  $Z = Z_{12} + R_3$ .

The resulting current of the parallel circuit is given as:  $I_{12} = \frac{U}{Z_{12}}$ .

The current through  $R_3$  is  $I_{3} = I_{12}$ .

Back to the first formula:  $Z = \frac{U}{I_{3}}$ .

**Exercise E1 Resistance of a Wire by Resistivity**  
**(written test, approx. 6 % of a 60-minute written test, WS2022)**

2. A heating element made of nichrome wire with a diameter of  $d = 0.5 \text{ mm}$  is used for heating. The power dissipation (= heat flow) of  $P = 40 \text{ W}$  is necessary. Calculate the current  $I$  needed to operate the heating element.

Solution

The heating element is  $l = 3 \text{ m}$  long and has a diameter of  $d = 0.5 \text{ mm}$ .

Calculate the resistance  $R$  of the heating element.

Solution

$$P = U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}}$$

$$\sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \Omega}} \quad \text{align*}$$


$$\begin{aligned} R &= \rho \cdot l \cdot \frac{1}{A} \quad \text{align*} \\ \frac{1}{4} d^2 \cdot \pi \cdot R &= \rho \cdot l \cdot \frac{1}{d^2 \cdot \pi} \quad \text{align*} \\ R &= \frac{4 \cdot l}{d^2 \cdot \pi} \cdot \rho \quad \text{align*} \\ R &= 1.10 \cdot 10^{-6} \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \quad \text{align*} \end{aligned}$$

**Exercise E4 Charging Capacitors**  
 (written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the light bulb) also consists of a DC voltage source  $U = 12 \text{ V}$ , a resistor  $R_1 = 20 \Omega$ , a capacitor  $C = 100 \mu\text{F}$ , and a light bulb  $R_B = 5 \Omega$ . The switch  $S_1$  is open. The voltage across the capacitor is again  $0 \text{ V}$  at the moment  $t_0 = 0 \text{ s}$  when the switch  $S_1$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.

**Solution**  
 Hint: To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_B$ .


**Solution**  
 The ideal voltage source  $U$  is in series with  $R_1$  and  $R_B$ . The voltage  $u_c$  is independent of  $R_B$ .  
 On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_B$ .

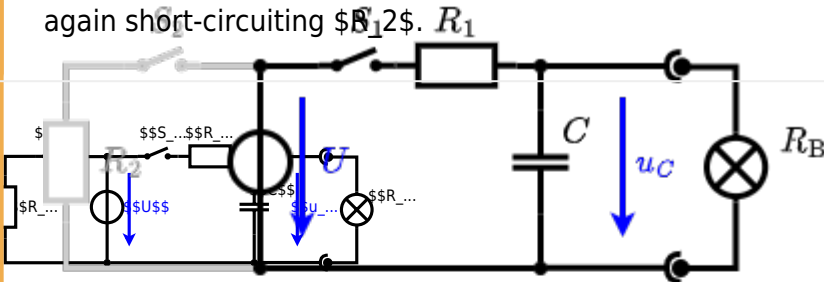

The circuit contains a voltage source  $U = 12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1 = 20 \Omega$  and a capacitor of  $C = 100 \mu\text{F}$ . The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first tasks. At the moment  $t_0 = 0 \text{ s}$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0) = 0 \text{ V}$ .

... First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time  $t_1$  when  $u_c(t_1) = 0.5 \cdot U$ .

**Solution**

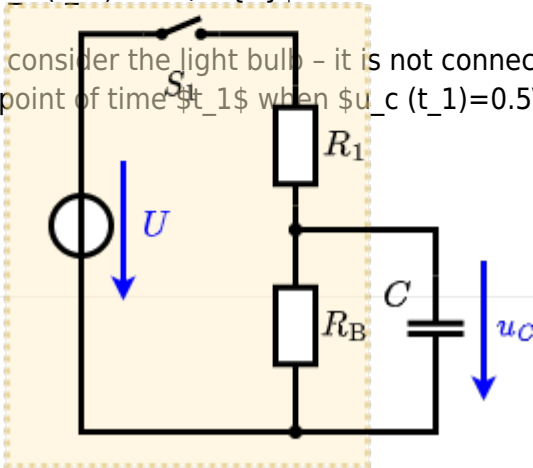

An equivalent linear voltage source can be given with  $U_s$ ,  $R_1$ , and  $R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$  The internal resistance is given by substituting the ideal voltage source with its resistance ( $R = 0 \Omega$ , short-circuit).


$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_c(t) = U_s \cdot (1 - e^{-t/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-t/(10 \Omega \cdot 100 \mu F)})$$

The following formula describes the time course of  $u_c(t)$  which has to be  $u_c(t_1) = 0.5 \cdot U$ :  

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to  $t$ :  

$$(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5)$$

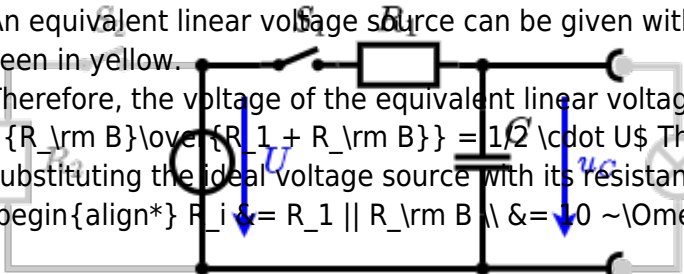


**Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)**

The following shall be solved at 0 degree,  $R_1 = R_2 = R_3 = 10 \Omega$  and the voltage  $U = 10V$  is given.  $R_B$ .

Solution

$$R_{eq} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.

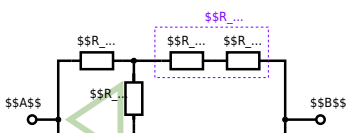


Since  $R_2=R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as: 
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series: 
$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance  $R_{\text{eq}}$  between  $A$  and  $B$ .

Solution

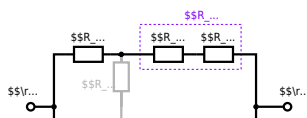

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel R_{\text{eq}} = (500 \sim \Omega) \parallel (200 \sim \Omega) \parallel R_{\text{eq}} = \frac{500 \sim \Omega \cdot 200 \sim \Omega}{500 \sim \Omega + 200 \sim \Omega}$$

From:  
<https://wiki.mexle.org/> - **MEXLE Wiki**

Permanent link:  
[https://wiki.mexle.org/ee1/ws2022\\_exam\\_r](https://wiki.mexle.org/ee1/ws2022_exam_r)

Last update: **2023/03/31 12:10**

