

# Exam Winter Semester 2022

## Student Group

First Name	Surname	Matrikel Nr.

## Table of Contents

- Exercise E5 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 3
- Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 6
- Exercise E7 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 7
- Exercise E10 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) ..... 7
- Exercise E8 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) ..... 11
- Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 11
- Exercise E6 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) ..... 12
- Exercise E4 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) ..... 13
- Exercise E2 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 15
- Exercise E3 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 19
- Exercise E1 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 20
- Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) ..... 20
- Exercise E9 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) ..... 24
- Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 24
- Exercise E1 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,


---

WS2022) .....	25
Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) .....	26

**Exercise E5 Equivalent linear Source  
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.  
Result

$$\begin{aligned} U_{\text{S}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} = 6 \Omega \end{aligned}$$

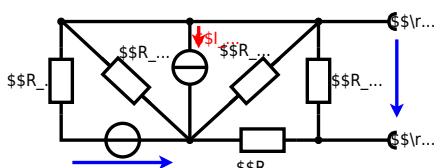

Calculated the internal resistance  $R_{\text{i}}$  and the source voltage  $U_{\text{S}}$  of an equivalent linear voltage source on the connectors  $\text{A}$  and  $\text{B}$ .  
 $R_1=5.0 \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3= 10 \Omega$ ,  $I_4=4.2 \text{ A}$ ,  $R_5=10 \Omega$ ,  $R_6=7.5 \Omega$ ,  $R_7=15 \Omega$   
 Use equivalent sources in order to simplify the circuit!

**Solution**

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :



Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ : 
$$R_{135} = R_1 || R_3 || R_5$$
 
$$I_{24} = I_2 - I_4$$
 The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following: 
$$U_{24} = I_{24} \cdot R_{135} + I_{24} \cdot R_4 + I_{24} \cdot R_{67}$$

$$U_{24} = U_{23} \cdot \frac{R_{135}}{R_6 + R_{135}}$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} = \left( \frac{U_{23}}{R_1} - I_4 \right) \cdot \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5}$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0 \Omega$ , so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with  $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$ :

$$U_{AB} = \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \cdot \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} || R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1 ws2022

**Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)**

2. The diagram shows a circuit with a constant voltage source  $U_0$  and a resistor  $R_0$  in series with a temperature-dependent resistor  $R$ . The resistor  $R$  has a resistance of  $10 \text{ k}\Omega$  at  $25^\circ\text{C}$  and a temperature coefficient of  $\alpha = 0.01 \text{ K}^{-1}$  and  $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$ . The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ . Calculate the resistance of the thermistor at  $-40^\circ\text{C}$ .

Result:  $R = 6.5 \text{ k}\Omega$

The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ . Calculate the resistance of the thermistor at  $-40^\circ\text{C}$ .

Resistors transfer electric energy into heat. Therefore, a solution is to use a heat pump up the refrigeration system.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad | \quad \Delta T = T_{\text{end}} - T_{\text{start}}$$

$$R = 10 \text{ k}\Omega \cdot \left( 1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

temperature dependent resistance, power, heat, exam ee1 ws2022

**Exercise E7 Analyzing complex Impedances**  
(written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage  $\underline{U}$  and the phasor current  $\underline{I}$  in the circuit shown in the figure. The components  $R$  and  $X_L$  shall be given.

After analysis, the following phasor values are to be extracted and given in magnitude and phase:  $|\underline{U}|$  and  $\angle \underline{U}$ ,  $|\underline{I}|$  and  $\angle \underline{I}$ .

Solution  
.. Calculate the physical values of the components.

Solution  
$$\underline{I} = \frac{\underline{U}}{\underline{Z}} \quad \text{with } \underline{Z} = R + j\omega L - j\frac{1}{\omega C}$$
  
The current and voltage are in phase since the circuit is purely resistive.  
The magnitude of the current is  $I = \frac{U}{|Z|} = \frac{50}{\sqrt{4.68^2 + 0.24^2}} = 10.6 \text{ A}$   
The phase of the current is  $\varphi = \arctan\left(\frac{-4.68}{0.24}\right) = -87.06^\circ$   
With the complex part comes the complex value  $\underline{U} = 50 \cdot \frac{1}{\sqrt{2}} \cdot e^{j(0.24 - 4.68)} = 35.36 \cdot e^{-j87.06^\circ}$   
The phase  $\varphi$  can be calculated as  $\varphi = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right) = \arctan\left(\frac{-4.68}{0.24}\right)$

complex impedance, exam ee1 ws2022

**Exercise E10 Complex Impedance Circuit**  
(written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the resulting phasor voltage  $\underline{U}$  and the phasor current  $\underline{I}$  in the circuit shown in the figure. The components  $R$  and  $X_L$  shall be given. The voltage source  $u(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t) \text{ V}$  is a linear source is connected with an inductor of  $330 \mu\text{H}$  and a capacitor of  $30.22 \mu\text{F}$ , all in series.

Solution  
Result  
.. Draw the circuit diagram of the given circuit.  
Label all components, voltages, and currents.

```

\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} \quad \omega = 2\pi f = 2\pi \cdot 15 \\
\omega &= 94.2 \text{ rad/s} \\
\end{align*}
\begin{align*} Z_L &= 2\pi f L = 2\pi \cdot 15 \cdot 330 \cdot 10^{-6} \\
&= 3.16 \text{ } \Omega \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} \quad \omega = 2\pi \cdot 15 \\
&\approx 330 \text{ } \mu\text{H} \\
\end{align*}
\begin{align*} \underline{Z} &= R + \underline{Z}_L + \underline{Z}_C \\
&= R + j\omega L - j\omega C \\
|\underline{Z}| &= \sqrt{R^2 + (\omega L - \omega C)^2} \\
\end{align*}

```

□□□□□□□□ □510...





complex impedance, exam ee1 ws2022

**Exercise E8 Impedances at different Frequencies**  
(written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit means that the current is constant on every component.  
The equivalent impedance for R and L combined is given by  $Z = R + j\omega L$   
Parallel circuit means that the voltage is the same on R and C  
The equivalent impedance for R and C combined is given by  $Z = \frac{R \cdot j\omega C}{R + j\omega C}$   
Since  $Z$  is perpendicular to  $R$ , this can be simplified to  $Z = \frac{R}{1 + j\omega RC}$   
Therefore the resulting current of the parallel circuit is given as:  
 $I = \frac{U}{Z} = \frac{U}{R} \cdot \frac{1 + j\omega RC}{1}$   
Back to the first formula:  $R \cdot I = X \cdot I \cdot C$   
 $R = X \cdot C$   
 $R = \frac{X \cdot C}{1}$

Solution

$R_1 = 1.00 \Omega$

$R_2 = 10.0 \Omega$

A series circuit means that the current is constant on every component.  
The equivalent impedance for R and L combined is given by  $Z = R + j\omega L$   
Parallel circuit means that the voltage is the same on R and C  
The equivalent impedance for R and C combined is given by  $Z = \frac{R \cdot j\omega C}{R + j\omega C}$   
Since  $Z$  is perpendicular to  $R$ , this can be simplified to  $Z = \frac{R}{1 + j\omega RC}$   
Therefore the resulting current of the parallel circuit is given as:  
 $I = \frac{U}{Z} = \frac{U}{R} \cdot \frac{1 + j\omega RC}{1}$   
Back to the first formula:  $R \cdot I = X \cdot I \cdot C$   
 $R = X \cdot C$   
 $R = \frac{X \cdot C}{1}$

complex impedance, exam ee1 ws2022

**Exercise E1 Resistance of a Wire by Resistivity**  
(written test, approx. 6 % of a 60-minute written test, WS2022)

The heating element is used to heat the wire with a temperature of 1800 K. Electric power dissipation (= heat flow) of  $P=40 \text{ W}$  is necessary.  
Calculate the current I needed to operate for heating elements.  
The Nichrome wire has a resistivity of  $1.10 \cdot 10^{-6} \Omega \cdot \text{m}$ .

The heating element is  $3 \text{ m}$  long and has a diameter of  $3.57 \text{ mm}$ .

Solution:  $R = 10^{-3} \Omega$

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad | \quad R &= \rho \cdot \frac{l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

resistivity, power, exam ee1 ws2022

**Exercise E6 Charging Capacitors**  
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the real battery) also takes into account the internal resistance of the battery. The voltage across the capacitor is again  $U_c(t_0) = 0 \text{ V}$  at the moment  $t_0 = 0 \text{ s}$  when the switch  $S_1$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.

**Solution**  
Hint: To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_2$ .

**Solution**  
The ideal voltage source  $U$  is in series with the voltage  $U_1 = \frac{U \cdot R_2}{R_1 + R_2}$  and the internal resistance  $R_1$  is in parallel with the resistor  $R_2$ . On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_2$ .




The circuit contains a voltage source  $U = 12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1 = 20 \text{ } \Omega$  and a capacitor of  $C = 100 \text{ } \mu\text{F}$ .

The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first asks. At the moment  $t_0 = 0 \text{ s}$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0) = 0 \text{ V}$ .

- .. First do not consider the light bulb - it is not connected to the RC circuit.
- Calculate the point of time  $t_1$  when  $u_c(t_1) = 0.5 \cdot U$ .

Solution

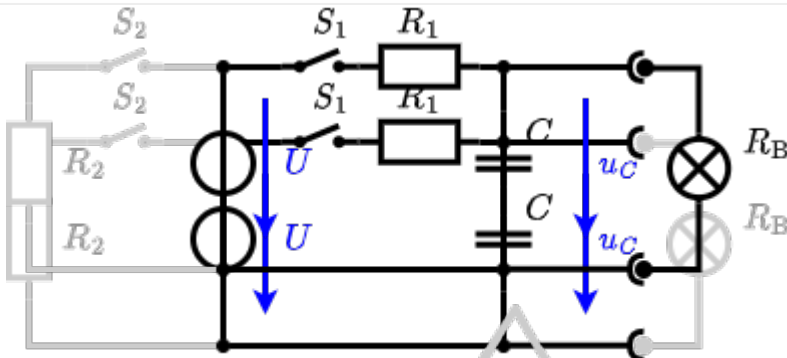

So, here only  $R_1$  and  $C$  gives the time constant:  $\tau = R_1 \cdot C$

The following formula describes the time course of  $u_C(t)$  which has to be  $u_C(t_1) = 0.5 \cdot U$ :  

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5$   

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5)$$



An equivalent linear voltage source can be given with  $U$ ,  $R_1$ , and  $R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$   
 The internal resistance is given by substituting the ideal voltage source with its resistance ( $= 0 \Omega$ , short-circuit).  
 $R_i = R_1 \parallel R_B = 10 \Omega$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms}/(10 \Omega \cdot 100 \mu\text{F})})$$

charging capacitors, dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1 ws2022


**Exercise E4 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)**

The following shall be solved at 20°C. On the left,  $R_1 = 10 \Omega$  and  $R_2 = 10 \Omega$  and the voltage source  $U = 20 \text{V}$ . The voltage  $u_{RB}$  is to be determined.

Solution

$$R_{\text{eq}} = 133.8 \, \Omega$$

Now a wye-delta transformation is necessary.

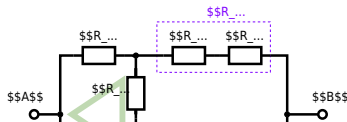

Since  $R_2=R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

.. The switch shall now be open. Calculate the equivalent resistance  $R_{\text{eq}}$  between  $A$  and  $B$ .

Solution

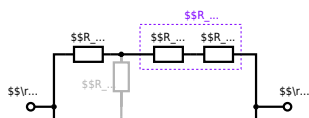

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$

[network simplification, exam ee1 ws2022](#)

**Exercise E2 Equivalent linear Source  
(written test, approx. 14 % of a 60-minute written test, WS2022)**


The circuit in the following has to be simplified.  
Result

$$U_s = U_{AB} = 4.5 \text{ V} \quad R_i = R_{AB} = 6 \Omega$$





The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :

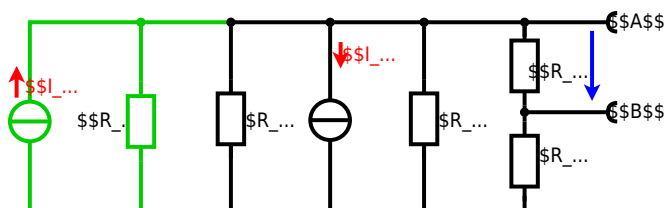

Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_{24}}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following:

$$U_{24}$$

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left( \frac{U_2}{R_1} - I_4 \right) \cdot \left( R_1 || R_3 || R_5 \right)$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0 \Omega$ , so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with  $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$ :

$$U_{AB} = \left( \frac{6.0 \text{ V}}{5.0 \Omega} \right) - 4.2 \Omega \cdot \left( \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1 ws2022

**Exercise E3 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)**

2. The diagram shows a circuit with a constant voltage source  $U_0$  and a resistor  $R_0$  in series with a temperature-dependent resistor  $R$ . The resistor  $R$  has a resistance of  $10 \text{ k}\Omega$  at  $25^\circ\text{C}$ . Your answer.

Its temperature coefficients are:  $\alpha = 0.01 \frac{1}{\text{K}}$  and  $\beta = 71 \cdot 10^{-6} \frac{1}{\text{K}^2}$ .

Result: The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .

$$R = 10 \text{ k}\Omega \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

Resistor transfer resistor  $R$  and  $R_0$  in series. Therefore, a solution is to use a heat sink up the refrigeration system.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

with  $\Delta T = T_{\text{end}} - T_{\text{start}}$

$$R = 10 \text{ k}\Omega \cdot \left( 1 + 0.01 \frac{1}{\text{K}} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \frac{1}{\text{K}^2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

temperature dependent resistance, power, heat, exam ee1 ws2022

### Exercise E1 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage  $\underline{U}$  and the phasor current  $\underline{I}$  in the circuit shown in the figure. The components  $R$  and  $X_L$  shall be given.

After analysis, the following phasors can be determined:  $\underline{U} = 4.68 \angle -20^\circ \text{ V}$  and  $\underline{I} = 0.24 \angle 70.6^\circ \text{ A}$ .  
Solution

.. Calculate the physical values of the components.  
Solution  $R = 40 \Omega$ ,  $L = 2.6 \text{ mH}$  and  $C = 106 \text{ nF}$

Solution  
$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{4.68 \angle -20^\circ}{40 + j4.68} = 0.24 \angle 70.6^\circ \text{ A}$$
  
The current and voltage are in phase since the circuit is purely resistive.  
The voltage across the capacitor is  $\underline{U}_C = \underline{I} \cdot (-jX_C) = 0.24 \cdot (-j16) = -3.84 \angle 90^\circ \text{ V}$   
The voltage across the inductor is  $\underline{U}_L = \underline{I} \cdot X_L = 0.24 \cdot 10.6 = 2.54 \angle 0^\circ \text{ V}$   
The voltage across the resistor is  $\underline{U}_R = \underline{I} \cdot R = 0.24 \cdot 40 = 9.6 \angle 0^\circ \text{ V}$   
The total voltage is  $\underline{U} = \underline{U}_R + \underline{U}_L + \underline{U}_C = 9.6 + 2.54 - 3.84 = 8.3 \angle 0^\circ \text{ V}$   
With the complex part comes the complex value  $\underline{U} = 8.3 \angle 0^\circ \text{ V}$   
The phase  $\varphi$  can be calculated as  $\varphi = \arctan\left(\frac{\text{Im}(\underline{U})}{\text{Re}(\underline{U})}\right) = \arctan\left(\frac{0}{8.3}\right) = 0^\circ$

complex impedance, exam ee1 ws2022

### Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the resulting phasor voltage  $\underline{U}$  and the phasor current  $\underline{I}$  in the circuit shown in the figure. The components  $R$  and  $X_L$  shall be given.  
Result  $\underline{U} = 4.68 \angle -20^\circ \text{ V}$  and  $\underline{I} = 0.24 \angle 70.6^\circ \text{ A}$

Solution  
This linear source is connected with an inductor of  $330 \mu\text{H}$  and a capacitor of  $22 \mu\text{F}$ , all in series.

.. Draw the circuit diagram of the given circuit.  
Label all components, voltages, and currents.

```

\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} \quad \omega = 2\pi \cdot 15 \\
\omega &= 2\pi \cdot 15 \cdot 10^{-3} = 942 \text{ rad/s} \\
\begin{align*} I &= \frac{U}{Z} = \frac{10}{\sqrt{R^2 + X^2}} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi \cdot 15 \cdot 330 \cdot 10^{-6}} \\
\end{align*}
\underline{Z} &= R + j\underline{Z}_L + \underline{Z}_C \quad \underline{Z} = R + j \\
&\quad \cdot \underline{Z}_L - j \cdot \underline{Z}_C \quad \underline{Z} = R + j(\underline{Z}_L - \underline{Z}_C) \\
|\underline{Z}| &= \sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2}
\end{align*}

```

□□□□□□□□ □510...





complex impedance, exam ee1 ws2022

**Exercise E9 Impedances at different Frequencies**  
 (written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit means that the current is constant on every component.  
 The equivalent impedance for  $R$  and  $L$  combined is given by  $Z = R + j\omega L$ .  
 A parallel circuit means that the voltage is the same on  $R$  and  $C$ .  
 The equivalent impedance for  $R$  and  $C$  combined is given by  $Z = \frac{R \cdot j\omega C}{1 + \omega^2 R^2 C^2}$ .  
 The resulting current of the parallel circuit is given as:  $I = \frac{U}{Z}$ .  
 Back to the first formula:  $R \cdot I = X \cdot I \cdot C$ .  
 $R = X \cdot C$ .  
 $R = \frac{X \cdot C}{1 + \omega^2 R^2 C^2}$ .  
 $R^2 (1 + \omega^2 R^2 C^2) = X \cdot C$ .  
 $R^2 + \omega^2 R^4 C^2 = X \cdot C$ .  
 $\omega^2 R^4 C^2 - X \cdot C + R^2 = 0$ .  
 $R^2 = \frac{X \cdot C \pm \sqrt{(X \cdot C)^2 - 4 \omega^2 C^2 R^2}}{2 \omega^2 C^2}$ .  
 $R = \frac{X \pm \sqrt{X^2 - 4 \omega^2 R^2}}{2 \omega C}$ .  
 This is a quadratic equation in  $R^2$ .  
 $R^2 = \frac{X \pm \sqrt{X^2 - 4 \omega^2 R^2}}{2 \omega C}$ .  
 $R^2 (1 + \omega^2 R^2 C^2) = X \cdot C$ .  
 $R^2 + \omega^2 R^4 C^2 = X \cdot C$ .  
 $\omega^2 R^4 C^2 - X \cdot C + R^2 = 0$ .  
 $R^2 = \frac{X \pm \sqrt{X^2 - 4 \omega^2 R^2}}{2 \omega C}$ .  
 $R = \frac{X \pm \sqrt{X^2 - 4 \omega^2 R^2}}{2 \omega C}$ .  
 This is a quadratic equation in  $R^2$ .  
 $R^2 = \frac{X \pm \sqrt{X^2 - 4 \omega^2 R^2}}{2 \omega C}$ .  
 $R^2 (1 + \omega^2 R^2 C^2) = X \cdot C$ .  
 $R^2 + \omega^2 R^4 C^2 = X \cdot C$ .  
 $\omega^2 R^4 C^2 - X \cdot C + R^2 = 0$ .  
 $R^2 = \frac{X \pm \sqrt{X^2 - 4 \omega^2 R^2}}{2 \omega C}$ .  
 $R = \frac{X \pm \sqrt{X^2 - 4 \omega^2 R^2}}{2 \omega C}$ .

Solution

$R_1 = 1.00 \cdot \omega$

$R_2 = 10.0 \cdot \omega$

A series circuit means that the current is constant on every component.  
 The equivalent impedance for  $R$  and  $L$  combined is given by  $Z = R + j\omega L$ .  
 A parallel circuit means that the voltage is the same on  $R$  and  $C$ .  
 The equivalent impedance for  $R$  and  $C$  combined is given by  $Z = \frac{R \cdot j\omega C}{1 + \omega^2 R^2 C^2}$ .  
 The resulting current of the parallel circuit is given as:  $I = \frac{U}{Z}$ .  
 Back to the first formula:  $R \cdot I = X \cdot I \cdot C$ .  
 $R = X \cdot C$ .  
 $R = \frac{X \cdot C}{1 + \omega^2 R^2 C^2}$ .  
 $R^2 (1 + \omega^2 R^2 C^2) = X \cdot C$ .  
 $R^2 + \omega^2 R^4 C^2 = X \cdot C$ .  
 $\omega^2 R^4 C^2 - X \cdot C + R^2 = 0$ .  
 $R^2 = \frac{X \pm \sqrt{X^2 - 4 \omega^2 R^2}}{2 \omega C}$ .  
 $R = \frac{X \pm \sqrt{X^2 - 4 \omega^2 R^2}}{2 \omega C}$ .  
 This is a quadratic equation in  $R^2$ .  
 $R^2 = \frac{X \pm \sqrt{X^2 - 4 \omega^2 R^2}}{2 \omega C}$ .  
 $R^2 (1 + \omega^2 R^2 C^2) = X \cdot C$ .  
 $R^2 + \omega^2 R^4 C^2 = X \cdot C$ .  
 $\omega^2 R^4 C^2 - X \cdot C + R^2 = 0$ .  
 $R^2 = \frac{X \pm \sqrt{X^2 - 4 \omega^2 R^2}}{2 \omega C}$ .  
 $R = \frac{X \pm \sqrt{X^2 - 4 \omega^2 R^2}}{2 \omega C}$ .

complex impedance, exam ee1 ws2022

**Exercise E1 Resistance of a Wire by Resistivity**  
 (written test, approx. 6 % of a 60-minute written test, WS2022)

The heating element is used to heat the wire with a temperature of  $1800 \text{ K}$ .  
 The power dissipation (= heat flow) of  $P = 40 \text{ W}$  is necessary.  
 Calculate the current  $I$  needed to operate it.  
 The Nichrome wire has a resistivity of  $1.10 \cdot 10^{-6} \cdot \Omega \cdot \text{m}$ .

The heating element is  $3 \text{ m}$  long and has a diameter of  $3.57 \text{ mm}$ .  
 Calculate the resistance  $R$  of the heating element.

Solution

$R = 1.10 \cdot 10^{-6} \cdot \frac{L}{A}$

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad | \quad R &= \rho \cdot \frac{l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

resistivity, power, exam ee1 ws2022

**Exercise E1 Charging Capacitors**  
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the real battery) also takes into account the internal resistance  $R_1$  of the battery. The capacitor  $C$  is initially uncharged. The switch  $S_1$  is open. The voltage across the capacitor is again  $U_c(t_0) = 0 \text{ V}$  at the moment  $t_0 = 0 \text{ s}$  when the switch  $S_1$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.

**Solution**  
Hint: To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_2$ .

**Solution**  
The ideal voltage source  $U$  is in series with the internal resistance  $R_1$  and the external resistance  $R_2$ . The voltage across the capacitor is  $u_c(t) = U \cdot (1 - e^{-t/\tau})$ , where  $\tau = (R_1 + R_2) \cdot C$ .  
On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_2$ .




The circuit contains a voltage source  $U = 12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1 = 20 \text{ } \Omega$  and a capacitor of  $C = 100 \text{ } \mu\text{F}$ .

The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first asks. At the moment  $t_0 = 0 \text{ s}$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0) = 0 \text{ V}$ .

- 1. First do not consider the light bulb - it is not connected to the RC circuit.
- 2. Calculate the point of time  $t_1$  when  $u_c(t_1) = 0.5 \cdot U$ .

Solution

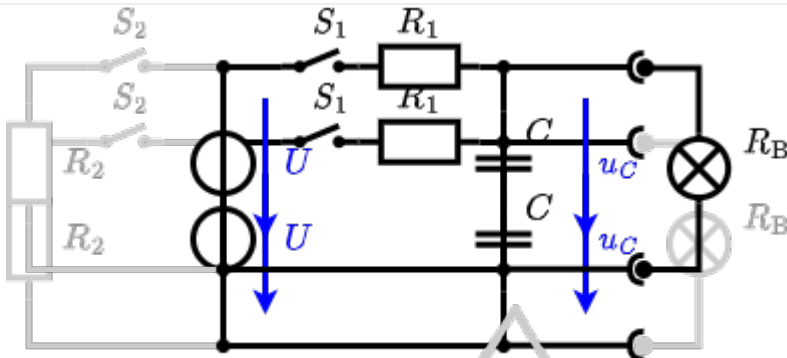

So, here only  $R_1$  and  $C$  gives the time constant:  $\tau = R_1 \cdot C$

The following formula describes the time course of  $u_C(t)$  which has to be  $u_C(t_1) = 0.5 \cdot U$ :  

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5$   

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5)$$



An equivalent linear voltage source can be given with  $U$ ,  $R_1$ , and  $R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$   
 The internal resistance is given by substituting the ideal voltage source with its resistance ( $= 0 \Omega$ , short-circuit).  
 $R_i = R_1 \parallel R_B = 10 \Omega$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms}/(10 \Omega \cdot 100 \mu\text{F})})$$

charging capacitors, dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1 ws2022


**Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)**

The following shall be solved at 200 kHz. Calculate the equivalent resistance  $R_{eq}$  and the voltage  $u_B$  across  $R_B$ .

Solution

$$R_{\text{eq}} = 133.8 \, \Omega$$

Now a wye-delta transformation is necessary.

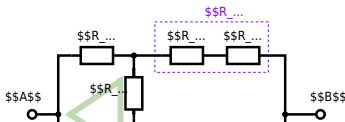

Since  $R_2=R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

.. The switch shall now be open. Calculate the equivalent resistance  $R_{\text{eq}}$  between  $A$  and  $B$ .

Solution

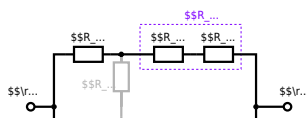

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel R_{\text{eq}} = \{ \{ 500 \sim \Omega \} \cdot 200 \sim \Omega \} \over { 500 \sim \Omega + 200 \sim \Omega } \parallel$$

network simplification, exam ee1 ws2022

From: <https://wiki.mexle.org/> - **MEXLE Wiki**

Permanent link: [https://wiki.mexle.org/electrical\\_engineering\\_1/ws2022\\_exam?rev=1676177525](https://wiki.mexle.org/electrical_engineering_1/ws2022_exam?rev=1676177525)

Last update: **2023/02/12 05:52**

