

Exam Winter Semester 2022

Student Group

| First Name | Surname | Matrikel Nr. |
|------------|---------|--------------|
| | | |
| | | |
| | | |

Table of Contents


| | |
|---|----|
| Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) | 3 |
| Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) | 6 |
| Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) | 7 |
| Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) | 7 |
| Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) | 11 |
| Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) | 11 |
| Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) | 12 |
| Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) | 13 |
| Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) | 15 |
| Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) | 19 |
| Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) | 20 |
| Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) | 20 |
| Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) | 24 |
| Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) | 24 |
| Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, | |

| | |
|---|----|
| WS2022) | 25 |
| Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) | 26 |

**Exercise E1 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result


$$\begin{aligned} U_{\text{S}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} = 6 \Omega \end{aligned}$$

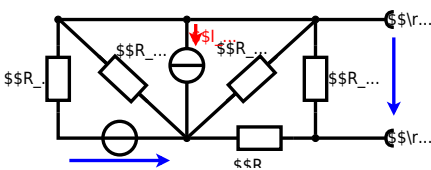

Calculated the internal resistance R_{i} and the source voltage U_{S} of an equivalent linear voltage source on the connectors A and B .
 $R_1=5.0 \Omega$, $U_2=6.0 \text{ V}$, $R_3= 10 \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \Omega$, $R_6=7.5 \Omega$, $R_7=15 \Omega$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

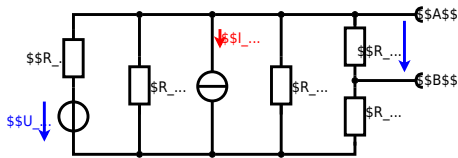

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :



Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135} + I_2 \cdot R_2 + I_4 \cdot R_3$$

$$U_{24} = U_{23} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5}$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) \cdot \left(\frac{U_{23}}{R_1} - I_4 \right) \cdot \left(\frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5} \right)$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \left(\frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \right) \cdot \left(\frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right) || R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1 ws2022

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. The diagram shows a circuit with a constant voltage source U_0 and a resistor R_0 in series with a temperature-dependent resistor R . The resistor R has a resistance of $10 \text{ k}\Omega$ at 25°C . Your answer.

Its temperature coefficients are: $\alpha = 0.01 \frac{1}{\text{K}}$ and $\beta = 71 \cdot 10^{-6} \frac{1}{\text{K}^2}$

Result The temperature inside the refrigeration system can reach down to -40°C .

$$R = 10 \text{ k}\Omega \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

Resistor transfer resistor R and R_0 in series. Therefore, a solution is to use a heat sink up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad | \quad \text{with } \Delta T = T_{\text{end}} - T_{\text{start}}$$

$$R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \frac{1}{\text{K}} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \frac{1}{\text{K}^2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

temperature dependent resistance, power, heat, exam ee1 ws2022

Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage \underline{U} and the phasor current \underline{I} in the circuit shown in the figure. The components R and X_L shall be given.

After analysis, the following phasors can be determined: $\underline{U} = 4.68 \angle -90^\circ \text{ V}$ and $\underline{I} = 0.24 \angle 0^\circ \text{ A}$.
Solution

1. Calculation of the physical values of the components.
Solution $R = 10 \Omega$, $X_L = 20 \Omega$, $X_C = 10 \Omega$

Solution
$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ \text{ V}}{209.96 \angle 90^\circ \Omega} = 0.24 \angle -90^\circ \text{ A}$$

The current and voltage are in phase since the circuit is purely resistive.
The voltage across the capacitor is $\underline{U}_C = \underline{I} \cdot X_C = 0.24 \angle -90^\circ \text{ A} \cdot 10 \angle 90^\circ \Omega = 2.4 \angle 0^\circ \text{ V}$
The voltage across the inductor is $\underline{U}_L = \underline{I} \cdot X_L = 0.24 \angle -90^\circ \text{ A} \cdot 20 \angle 90^\circ \Omega = 4.8 \angle 0^\circ \text{ V}$
The voltage across the resistor is $\underline{U}_R = \underline{I} \cdot R = 0.24 \angle -90^\circ \text{ A} \cdot 10 \angle 0^\circ \Omega = 2.4 \angle -90^\circ \text{ V}$
The total voltage is $\underline{U} = \underline{U}_R + \underline{U}_L + \underline{U}_C = 2.4 \angle -90^\circ \text{ V} + 4.8 \angle 0^\circ \text{ V} + 2.4 \angle 90^\circ \text{ V} = 4.68 \angle -90^\circ \text{ V}$
The phase angle φ can be calculated as $\varphi = \arctan\left(\frac{\text{Im}(\underline{U})}{\text{Re}(\underline{U})}\right) = \arctan\left(\frac{-4.68}{0.24}\right) = -90^\circ$
With the complex part comes the complex value $\underline{U} = 4.68 \angle -90^\circ \text{ V}$
 $\underline{I} = \frac{\underline{U}}{Z} = \frac{4.68 \angle -90^\circ \text{ V}}{209.96 \angle 90^\circ \Omega} = 0.24 \angle 0^\circ \text{ A}$
The phase angle φ can be calculated as $\varphi = \arctan\left(\frac{\text{Im}(\underline{I})}{\text{Re}(\underline{I})}\right) = \arctan\left(\frac{0}{0.24}\right) = 0^\circ$

complex impedance, exam ee1 ws2022

Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the resulting phasor voltage \underline{U} and the phasor current \underline{I} in the circuit shown in the figure. The components R and X_L shall be given. The voltage source $u(t) = 3.0 \sin(2\pi \cdot 15 \cdot t) \text{ V}$.
Solution

This linear source is connected with an inductor of $330 \mu\text{H}$ and a capacitor of $30.22 \mu\text{F}$, all in series.
Result
1. Calculation of the physical values of the components.
Solution $R = 10 \Omega$, $X_L = 6.28 \Omega$, $X_C = 19.8 \Omega$
2. Draw the circuit diagram of the given circuit. Label all components, voltages, and currents.

```

\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} \quad \omega = 2\pi f = 2\pi \cdot 15 \\
\omega &= 2\pi \cdot 15 = 94.2 \text{ rad/s} \\
\begin{align*} I &= \frac{U}{Z} = \frac{100}{\sqrt{R^2 + \left(\frac{1}{\omega C} - \omega L\right)^2}} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi \cdot 15 \cdot 330 \cdot 10^{-6}} \\
\end{align*}
\begin{align*} \underline{Z} &= R + j\underline{Z}_L + \underline{Z}_C \quad \underline{Z} = R + j \\
&\quad \cdot \underline{Z}_L - j \cdot \underline{Z}_C \quad \underline{Z} = R + j(\underline{Z}_L - \underline{Z}_C) \quad |\underline{Z}| = \\
&\quad \sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2} \\
\end{align*}

```

□□□□□□□□ □510...



complex impedance, exam ee1 ws2022

Exercise E6 Impedances at different Frequencies
 (written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit contains a resistor with $R_1 = 1.00 \text{ k}\Omega$ and a capacitor with $C_1 = 40 \text{ nF}$. A voltage source of $V = 10 \text{ V}$ is connected in series with the resistor and capacitor. Calculate the magnitude of the impedance of the series combination at $f = 4 \text{ MHz}$.

Solution

$$Z_{R_1} = 1.00 \text{ k}\Omega$$

$$Z_{C_1} = \frac{1}{j\omega C_1} = \frac{1}{j \cdot 2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} = -j10.0 \text{ k}\Omega$$

A series circuit means that the current is constant on every component. The equivalent impedance for R_1 and Z_{C_1} combined is given by

Parallel circuit means that the voltage is the same on R_1 and Z_{C_1}

Since Z_{C_1} is perpendicular to R_1 , the resulting current of the parallel circuit is given as:

$$I_{\text{total}} = \sqrt{I_{R_1}^2 + I_{C_1}^2} = \sqrt{\left(\frac{V}{R_1}\right)^2 + \left(\frac{V}{|Z_{C_1}|}\right)^2} = \frac{V}{60 \text{ mA}}$$

Back to the first formula:

$$R_3 \cdot I_{\text{total}} = |Z_{C_1}| \cdot I_{\text{total}}$$

$$R_3 = |Z_{C_1}| = 10.0 \text{ k}\Omega$$

complex impedance, exam ee1 ws2022

Exercise E1 Resistance of a Wire by Resistivity
 (written test, approx. 6 % of a 60-minute written test, WS2022)

A heating element made of nichrome wire with a cross-sectional area of $A = 1.80 \text{ mm}^2$ and a length of $L = 3.57 \text{ m}$ is used. The power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary. Calculate the resistance R of the heating element.

Solution

The heating element is $L = 3.57 \text{ m}$ long and has a diameter of $d = 1.35 \text{ mm}$.

Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad | \quad R &= \rho \cdot \frac{l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

resistivity, power, exam ee1 ws2022

Exercise E4 Charging Capacitors
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the real battery) also takes into account the internal resistance of the battery. The voltage across the capacitor is again $U_c(t_0) = 0 \text{ V}$ at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution
Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution
The ideal voltage source U is in series with the voltage $U_1 = \frac{U \cdot R_2}{R_1 + R_2}$ and the internal resistance R_1 is in parallel with the resistor R_2 .
On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .




The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ } \Omega$ and a capacitor of $C = 100 \text{ } \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first asks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

- 1. First do not consider the light bulb - it is not connected to the RC circuit.
- 2. Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

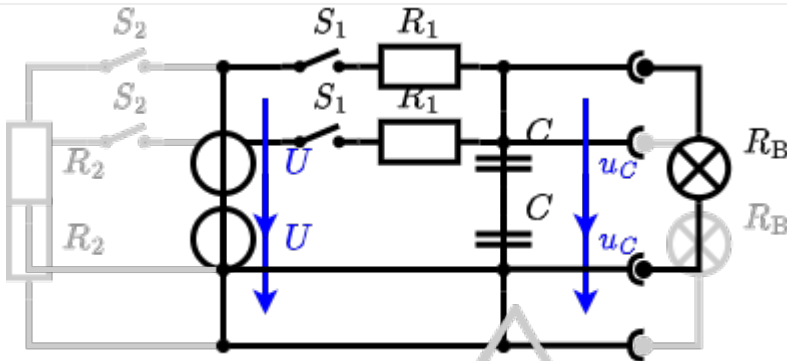

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_C(t)$ which has to be $u_C(t_1) = 0.5 \cdot U$:

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5)$$



An equivalent linear voltage source can be given with U , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$
 The internal resistance is given by substituting the ideal voltage source with its resistance ($= 0 \Omega$, short-circuit).
 $R_i = R_1 \parallel R_B = 10 \Omega$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms} / (10 \Omega \cdot 100 \mu\text{F})})$$

charging capacitors, dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1 ws2022


Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 200 kHz. Calculate the equivalent resistance R_{eq} and the voltage u_{RB} across R_B .

Solution

$$R_{\text{eq}} = 133.8 \Omega$$

Now a wye-delta transformation is necessary.

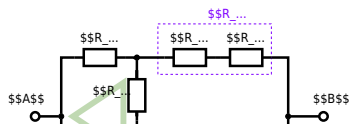

Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

.. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

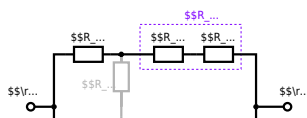

The equivalent resistor is given by a parallel configuration of resistors in series:


$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim\Omega + 200 \sim\Omega + 200 \sim\Omega) \parallel (100 \sim\Omega + 100 \sim\Omega) \parallel R_{\text{eq}} = (500 \sim\Omega) \parallel (200 \sim\Omega) \parallel R_{\text{eq}} = \frac{\{500 \sim\Omega \cdot 200 \sim\Omega\}}{500 \sim\Omega + 200 \sim\Omega}$$

[network simplification, exam ee1 ws2022](#)

**Exercise E3 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result

$$U_{\text{S}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \sim\Omega$$

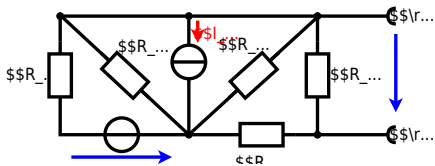


Calculate the internal resistance R_i and the source voltage U_s of an equivalent linear voltage source on the connectors A and B . $R_1=5.0 \Omega$, $U_2=6.0 \text{ V}$, $R_3= 10 \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \Omega$, $R_6=7.5 \Omega$, $R_7=15 \Omega$ Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

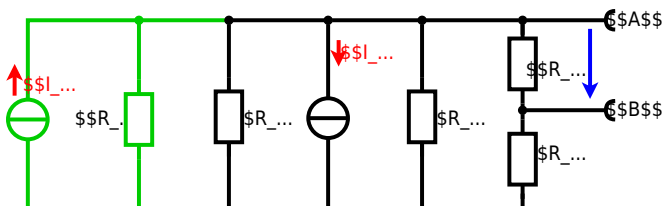

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :
$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$
 The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:
$$U_{24} = I_{24} \cdot R_{56}$$

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left(\frac{U_2}{R_1} - I_4 \right) \cdot \left(R_1 || R_3 || R_5 \right)$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \left(\frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \right) \cdot \left(\frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1 ws2022

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. The diagram shows a circuit with a constant voltage source U_0 and a resistor R_0 in series with a temperature-dependent resistor R . The resistor R has a resistance of $10 \text{ k}\Omega$ at 25°C . Your answer.

Its temperature coefficients are: $\alpha = 0.01 \frac{1}{\text{K}}$ and $\beta = 71 \cdot 10^{-6} \frac{1}{\text{K}^2}$

Result: The temperature inside the refrigeration system can reach down to -40°C .

$$R = 10 \text{ k}\Omega \cdot \left(1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2 \right)$$

Resistor transfer resistor R and R_0 in series. The power P is given by $P = \frac{U^2}{R}$. Therefore, a solution is to increase the resistance R up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot \left(1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2 \right)$$

with $\Delta T = T_{\text{end}} - T_{\text{start}}$

$$R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \frac{1}{\text{K}} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \frac{1}{\text{K}^2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

temperature dependent resistance, power, heat, exam ee1 ws2022

Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage \underline{U} and the phasor current \underline{I} in the circuit shown in the figure. The components R and X_L shall be given.

After analysis, the following information can be extracted: $\underline{U} = 4.68 \angle -90^\circ$ V and $\underline{I} = 0.24 \angle 0^\circ$ A. The phase angle φ is 90° .

.. Calculate the physical values of the components.

Solution: $R = 4.68 \Omega$ and $X_L = 2\pi \cdot 300 \text{ Hz} \cdot L = 4.68 \Omega \Rightarrow L = 1.23 \mu\text{H}$

Solution

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} \quad \text{with } \underline{Z} = R + jX_L = 4.68 + j4.68 \Omega$$

The current and voltage are in phase since $\varphi = 0^\circ$ (pure real resulting impedance). $\underline{I} = 0.24 \angle 0^\circ$ A and $\underline{U} = 4.68 \angle -90^\circ$ V.

The phase, the component must be a capacitor with the same absolute value 4.68Ω .

$$\underline{U} = \underline{I} \cdot \underline{Z} = 0.24 \angle 0^\circ \cdot (4.68 + j4.68) = 1.1232 \angle -90^\circ + j1.1232 \angle 0^\circ = 1.1232 \angle -90^\circ + j1.1232 \angle 0^\circ$$

With the complex part comes the complex value $\underline{U} = 4.68 \angle -90^\circ$ V.

The phase φ can be calculated as $\varphi = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right) = \arctan\left(\frac{4.68}{4.68}\right) = 45^\circ$

complex impedance, exam ee1 ws2022

Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the resulting phasor voltage \underline{U} and the phasor current \underline{I} in the circuit shown in the figure. The components R and X_L shall be given. The voltage source $u(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$ V and the frequency is $f = 15$ Hz.

Solution: This linear source is connected with an inductor of $330 \mu\text{H}$ and a capacitor of $30.22 \mu\text{F}$, all in series.

Result: $\underline{I} = 107.31 \text{ mA} \angle 0^\circ$ and $\underline{U} = 48.2 \angle -90^\circ$ V. $Z = 19.8 \angle -90^\circ \Omega$

```

\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} \quad \omega = 2\pi \cdot 15 \\
\omega &= 2\pi \cdot 15 \cdot 10^{-3} = 94.2 \text{ rad/s} \\
\begin{align*} I &= \frac{U}{Z} = \frac{10}{\sqrt{R^2 + \left(\frac{1}{2\pi f C}\right)^2}} \\
&= \frac{10}{\sqrt{30^2 + \left(\frac{1}{2\pi \cdot 15 \cdot 10^{-3}}\right)^2}} \\
&= \frac{10}{\sqrt{900 + 19.28^2}} \approx 0.28 \text{ A} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi \cdot 15 \cdot 10^{-3} \cdot 330 \cdot 10^{-6}} \\
&= \frac{1}{2\pi \cdot 15 \cdot 330 \cdot 10^{-9}} \\
\end{align*}
\underline{Z} = R + j\underline{Z}_L + \underline{Z}_C \quad \underline{Z} = R + j \\
\cdot \underline{Z}_L - j \cdot \underline{Z}_C \quad \underline{Z} = R + j(\underline{Z}_L - \underline{Z}_C) \quad |\underline{Z}| = \\
\sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2}
\end{align*}

```

□□□□□□□□ □510...



complex impedance, exam ee1 ws2022

Exercise E6 Impedances at different Frequencies
 (written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit with a resistor $R_1 = 1.00 \text{ k}\Omega$ and a capacitor $C_1 = 40 \text{ nF}$ is connected to an AC voltage source of $U = 10 \text{ V}$ at a frequency $f = 4 \text{ MHz}$. Calculate the absolute value of the impedance $|Z|$ of the circuit.

Solution

$|Z| = \sqrt{R^2 + X_C^2}$

$|Z| = \sqrt{(1.00 \text{ k}\Omega)^2 + \left(\frac{1}{2\pi \cdot 4 \text{ MHz} \cdot 40 \text{ nF}}\right)^2}$

$|Z| = \sqrt{1.00^2 + 0.0001^2} \text{ k}\Omega \approx 1.00 \text{ k}\Omega$

A series circuit means that the current is constant on every component. The equivalent impedance for R and X_C combined is given by $|Z| = \sqrt{R^2 + X_C^2}$. Parallel circuit means that the voltage is the same on R and X_C . $|Z| = \sqrt{R^2 + X_C^2}$. Since $X_C \ll R$, $|Z| \approx R$. Therefore, the resulting current of the parallel circuit is given as: $I = \frac{U}{|Z|} \approx \frac{U}{R}$. This can be simplified to $I = \frac{U}{R}$. Therefore, the resulting current of the parallel circuit is given as: $I = \frac{U}{R}$.

complex impedance, exam ee1 ws2022

Exercise E1 Resistance of a Wire by Resistivity
 (written test, approx. 6 % of a 60-minute written test, WS2022)

A heating element made of nichrome wire with a cross-section of $A = 1.80 \text{ mm}^2$ and a length of $l = 3.57 \text{ m}$ is connected to a power supply of $U = 10 \text{ V}$. Calculate the resistance R of the heating element.

Solution

$R = \frac{\rho \cdot l}{A}$

$R = \frac{1.10 \cdot 10^{-6} \text{ }\Omega\text{m} \cdot 3.57 \text{ m}}{1.80 \cdot 10^{-6} \text{ m}^2}$

$R = 2.15 \text{ }\Omega$

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad | \quad R &= \rho \cdot \frac{l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

resistivity, power, exam ee1 ws2022

Exercise E4 Charging Capacitors
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the algebra) also takes into account the charging capacitor. The voltage across the capacitor is again $U_c(t_2)$ at the moment $t_2 = 1 \text{ ms}$ after closing the switch.

Solution
To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution
The ideal voltage source U and the voltage U_c are independent of this circuit. On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .




The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ } \Omega$ and a capacitor of $C = 100 \text{ } \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first asks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

- .. First do not consider the light bulb - it is not connected to the RC circuit.
- Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

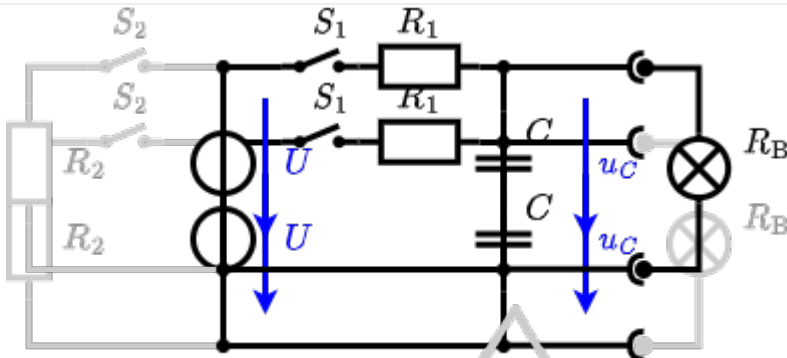

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_C(t)$ which has to be $u_C(t_1) = 0.5 \cdot U$:

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5)$$



An equivalent linear voltage source can be given with U , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$
 The internal resistance is given by substituting the ideal voltage source with its resistance ($= 0 \Omega$, short-circuit).
 $R_i = R_1 \parallel R_B = 10 \Omega$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms}/(10 \Omega \cdot 100 \mu\text{F})})$$

charging capacitors, dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1 ws2022


Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 20°C. On the left, $R_1 = 10 \Omega$ and $R_2 = 10 \Omega$ and the voltage source $U = 20 \text{V}$. The voltage u_B is given across R_B .

Solution

$$R_{\text{eq}} = 133.8 \, \Omega$$

Now a wye-delta transformation is necessary.

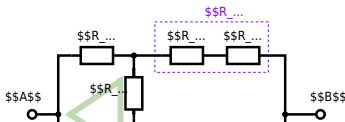

Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

.. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

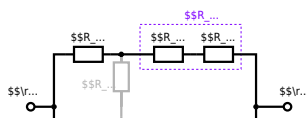

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel R_{\text{eq}} = \{ \{ 500 \sim \Omega \} \cdot 200 \sim \Omega \} \over { 500 \sim \Omega + 200 \sim \Omega } \parallel$$

network simplification, exam ee1 ws2022

From: <https://wiki.mexle.org/> - **MEXLE Wiki**

Permanent link: https://wiki.mexle.org/electrical_engineering_1/ws2022_exam?rev=1676177525

Last update: **2023/02/12 05:52**

