

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	3
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	6
Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	7
Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	7
Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	11
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	11
Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)	12
Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	13
Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	15
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	19
Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	20
Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	20
Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	24
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	24
Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,	


WS2022)	25
Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	26

~~#@ee1_taskctr.#~~

**Exercise E1 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result


$$\begin{aligned} U_{\text{rs}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} = 6 \text{ } \Omega \end{aligned}$$

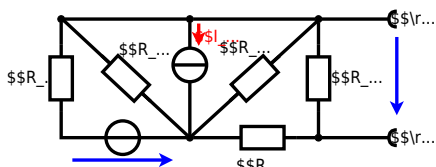


Calculated the internal resistance R_{i} and the source voltage U_{rs} of an equivalent linear voltage source on the connectors A and B . $R_1=5.0 \text{ } \Omega$, $U_2=6.0 \text{ V}$, $R_3= 10 \text{ } \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \text{ } \Omega$, $R_6=7.5 \text{ } \Omega$, $R_7=15 \text{ } \Omega$ Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

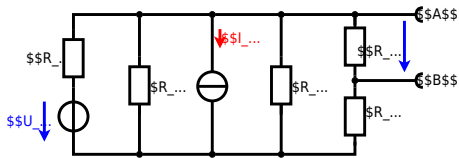

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

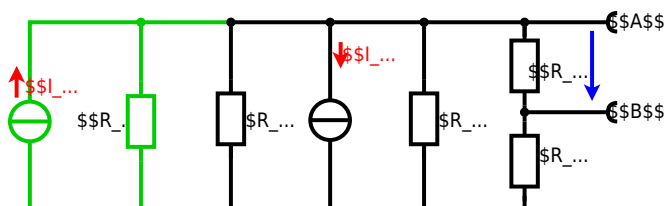

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :
$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$
 The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:
$$U_{24} = I_{24} \cdot (R_{135} + R_{AB} + R_{BC})$$

$$U_{24} = (U_2 \cdot R_1) / (R_1 + R_2) = (10 \text{ V} \cdot 10 \text{ }\Omega) / (10 \text{ }\Omega + 10 \text{ }\Omega) = 5 \text{ V}$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} = 5 \text{ V} \cdot \frac{15 \text{ }\Omega}{15 \text{ }\Omega + 7.5 \text{ }\Omega + 2.5 \text{ }\Omega} = 15 \text{ V} / 22.5 = 2.5 \text{ V}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \text{ }\Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5) = 15 \text{ }\Omega || (15 \text{ }\Omega + 2.5 \text{ }\Omega) = 15 \text{ }\Omega || 17.5 \text{ }\Omega = 7.5 \text{ }\Omega$$

with $R_1 || R_3 || R_5 = 5 \text{ }\Omega || 10 \text{ }\Omega || 10 \text{ }\Omega = 5 \text{ }\Omega || 5 \text{ }\Omega = 2.5 \text{ }\Omega$:

$$U_{AB} = \frac{6.0 \text{ V}}{5.0 \text{ }\Omega} - 4.2 \text{ V} \cdot \frac{15 \text{ }\Omega \cdot 2.5 \text{ }\Omega}{7.5 \text{ }\Omega + 15 \text{ }\Omega + 2.5 \text{ }\Omega} = 1.2 \text{ V} - 4.2 \text{ V} \cdot \frac{37.5}{25} = 1.2 \text{ V} - 6.3 \text{ V} = -5.1 \text{ V}$$

$$R_{AB} = 15 \text{ }\Omega || (7.5 \text{ }\Omega + 2.5 \text{ }\Omega) = 15 \text{ }\Omega || 10 \text{ }\Omega = 6 \text{ }\Omega$$

~~#@ee1_taskctr.##~~

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. The diagram shows a thermistor with a resistance of $10 \text{ k}\Omega$ at $25 \text{ }^\circ\text{C}$. The thermistor has a resistance of $1 \text{ }\Omega$ at $0 \text{ }^\circ\text{C}$. Calculate the resistance of the thermistor at $40 \text{ }^\circ\text{C}$.

Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

Result: The temperature inside the refrigeration system can reach down to $-40 \text{ }^\circ\text{C}$. Calculate the resistance of the thermistor at $40 \text{ }^\circ\text{C}$.

Resistor transfer resistor R and R_0 are connected in series. Therefore, a solution is to use a heat sink up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad | \quad \Delta T = T_{\text{end}} - T_{\text{start}}$$

$$R = 10 \text{ k}\Omega \cdot (1 + 0.01 \text{ K}^{-1} \cdot (-40 \text{ }^\circ\text{C} - 25 \text{ }^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40 \text{ }^\circ\text{C} - 25 \text{ }^\circ\text{C})^2) = 10 \text{ k}\Omega \cdot (1 - 0.47 + 0.0008) = 5.53 \text{ k}\Omega$$


```

\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} \quad \omega = 2\pi f = 2\pi \cdot 15 \\
\omega &= 2\pi \cdot 15 = 94.2 \text{ rad/s} \\
\begin{align*} I &= \frac{U}{Z} = \frac{100}{\sqrt{R^2 + \left(\frac{1}{\omega C}\right)^2}} \\
&= \frac{100}{\sqrt{30^2 + \left(\frac{1}{94.2 \cdot 10^{-6}}\right)^2}} \\
&= 19.28 \text{ A} \quad \omega = 19.28 \cdot 2\pi = 121.3 \text{ rad/s} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} \quad \omega = 2\pi f = 2\pi \cdot 15 \\
&= \frac{1}{2\pi \cdot 15 \cdot 10^{-6}} = 568.4 \text{ } \Omega \\
\end{align*}
\begin{align*} \underline{Z} &= R + j\underline{Z}_L + \underline{Z}_C \quad \underline{Z} = R + j \\
&\cdot \underline{Z}_L - j\underline{Z}_C \quad \underline{Z} = R + j\underline{Z}_L - j\underline{Z}_C \\
|\underline{Z}| &= \sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2} \\
\end{align*}

```

□□□□□□□□ □510...



~~#@ee1_taskctr.#~~

Exercise E6 Impedances at different Frequencies
(written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit means that the current is constant on every component.
The equivalent impedance for R and L combined is given by $Z = \sqrt{R^2 + X_L^2}$
Parallel circuit means that the voltage is the same on R and C
Since $X_C = 1/(\omega C)$ is perpendicular to R , this can be simplified to $Z = \sqrt{R^2 + X_C^2}$
Therefore the resulting current of the parallel circuit is given as:
 $I_{total} = I_R + I_C$
 $I_{total} = \frac{V}{R} + \frac{V}{X_C}$
Back to the first formula: $R \cdot I_{total} = X_C \cdot I_{total} \cdot \frac{I_{total}}{I_{total}}$
 $R = X_C \cdot \frac{I_{total}}{I_{total}}$

Solution

$R_1 = 1.00 \cdot \omega$

$R_2 = 10.0 \cdot \omega$

A series circuit means that the current is constant on every component.
The equivalent impedance for R and L combined is given by $Z = \sqrt{R^2 + X_L^2}$
Parallel circuit means that the voltage is the same on R and C
Since $X_C = 1/(\omega C)$ is perpendicular to R , this can be simplified to $Z = \sqrt{R^2 + X_C^2}$
Therefore the resulting current of the parallel circuit is given as:
 $I_{total} = I_R + I_C$
 $I_{total} = \frac{V}{R} + \frac{V}{X_C}$
Back to the first formula: $R \cdot I_{total} = X_C \cdot I_{total} \cdot \frac{I_{total}}{I_{total}}$
 $R = X_C \cdot \frac{I_{total}}{I_{total}}$

~~#@ee1_taskctr.#~~

Exercise E1 Resistance of a Wire by Resistivity
(written test, approx. 6 % of a 60-minute written test, WS2022)

The heating element is used to heat the wire with a temperature of 1800 K. Electric power dissipation (= heat flow) of $P=40 \text{ W}$ is necessary.

Calculate the current I needed to operate for heating elements.

The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6} \cdot \Omega \cdot \text{m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .

Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad | \quad R &= \rho \cdot \frac{l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

~~#@ee1_taskctr.##~~

Exercise E4 Charging Capacitors
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the real battery) also takes into account the internal resistance of the battery. The voltage across the capacitor is again $U_c(t_2)$ at the moment $t_2 = 1 \text{ ms}$ after closing the switch. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution
 Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .


Solution
 The ideal voltage source U and the internal resistance R_1 can be replaced by an equivalent voltage source $U_{eq} = U \cdot \frac{R_2}{R_1 + R_2}$ and an internal resistance $R_{eq} = R_1 \cdot \frac{R_2}{R_1 + R_2}$.
 On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .



The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ } \Omega$ and a capacitor of $C = 100 \text{ } \mu\text{F}$.
 The switch S_2 to an additional consumer R_2 will be considered to be open for the first asks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

... First do not consider the light bulb - it is not connected to the RC circuit.
 Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

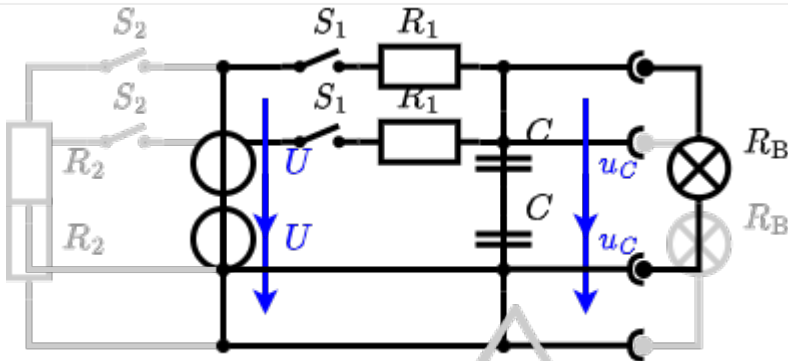

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_C(t)$ which has to be $u_C(t_1) = 0.5 \cdot U$:

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5 \Rightarrow e^{-t/\tau} = 0.5 \Rightarrow -t/\tau = \ln(0.5) \Rightarrow t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$



An equivalent linear voltage source can be given with U_s , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$ The internal resistance is given by substituting the ideal voltage source with its resistance ($R_i = 0 \Omega$, short-circuit).
 $R_i = R_1 \parallel R_B = 10 \Omega$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms}/(10 \Omega \cdot 100 \mu\text{F})})$$


~~#@ee1_taskctr.#~~

Exercise E3 Pure Resistor Network Simplification
 (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 0°C. $R_1 = R_2 = R_3 = 10 \Omega$, $C = 1 \mu\text{F}$ and the switch is given. R_B .

Solution

$R_2 = R_3 = 100 \Omega$

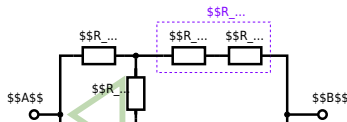

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

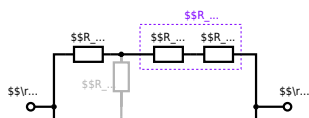

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2)$$

$$R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega)$$

$$R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega)$$

$$R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega}$$


~~#@ee1_taskctr.#~~

Exercise E3 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
 Result

$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V}$$


$$R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

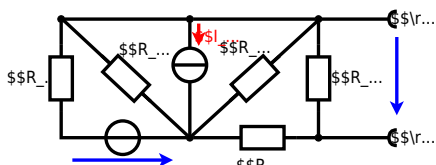

Calculated the internal resistance R_{int} and the source voltage U_{oc} of an equivalent linear voltage source on the connectors A and B . $R_1=5.0 \text{ } \Omega$, $U_2=6.0 \text{ V}$, $R_3= 10 \text{ } \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \text{ } \Omega$, $R_6=7.5 \text{ } \Omega$, $R_7=15 \text{ } \Omega$ Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

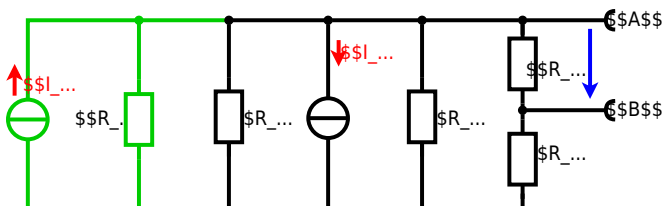

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot (R_6 + R_7)$$

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left(\frac{U_2}{R_1} - I_4 \right) \cdot \left(\frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5} \right)$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \left(\frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \right) \cdot \left(\frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

~~#@ee1_taskctr.##~~

Exercise E2 Temperature-dependent Resistance
(written test, approx. 6 % of a 60-minute written test, WS2022)

2. The diagram shows a temperature-dependent resistor in a circuit. The resistor has a resistance of $10 \text{ k}\Omega$ at 25°C . Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$. Calculate the resistance of the thermistor at -40°C .

Result: $R = 6.5 \text{ k}\Omega$

The temperature inside the refrigeration system can reach down to -40°C .

$$R = 10 \text{ k}\Omega \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

with $\Delta T = T_{\text{end}} - T_{\text{start}}$

$$R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

~~#@ee1_taskctr.#~~

Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage \underline{u} across the $4.68 \text{ m}\Omega$ resistor in the circuit shown in the figure. The current \underline{i} is given by $i(t) = 0.24 \cos(300t - 16^\circ) \text{ A}$. The voltage \underline{u} is to be determined across the $4.68 \text{ m}\Omega$ resistor.

Result: $\underline{u} = 1.98 \text{ V} \angle -16^\circ$

Solution: The current \underline{i} is given by $i(t) = 0.24 \cos(300t - 16^\circ) \text{ A}$. The voltage \underline{u} is to be determined across the $4.68 \text{ m}\Omega$ resistor.

Result: $\underline{u} = 1.98 \text{ V} \angle -16^\circ$

Solution: The current \underline{i} is given by $i(t) = 0.24 \cos(300t - 16^\circ) \text{ A}$. The voltage \underline{u} is to be determined across the $4.68 \text{ m}\Omega$ resistor.

Result: $\underline{u} = 1.98 \text{ V} \angle -16^\circ$

Solution: The current \underline{i} is given by $i(t) = 0.24 \cos(300t - 16^\circ) \text{ A}$. The voltage \underline{u} is to be determined across the $4.68 \text{ m}\Omega$ resistor.

Result: $\underline{u} = 1.98 \text{ V} \angle -16^\circ$

Solution: The current \underline{i} is given by $i(t) = 0.24 \cos(300t - 16^\circ) \text{ A}$. The voltage \underline{u} is to be determined across the $4.68 \text{ m}\Omega$ resistor.

Result: $\underline{u} = 1.98 \text{ V} \angle -16^\circ$

Solution: The current \underline{i} is given by $i(t) = 0.24 \cos(300t - 16^\circ) \text{ A}$. The voltage \underline{u} is to be determined across the $4.68 \text{ m}\Omega$ resistor.

Result: $\underline{u} = 1.98 \text{ V} \angle -16^\circ$

Solution: The current \underline{i} is given by $i(t) = 0.24 \cos(300t - 16^\circ) \text{ A}$. The voltage \underline{u} is to be determined across the $4.68 \text{ m}\Omega$ resistor.

~~#@ee1_taskctr.#~~

Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the steady-state phasor voltage \underline{u} across the $4.68 \text{ m}\Omega$ resistor in the circuit shown in the figure. The current \underline{i} is given by $i(t) = 0.24 \cos(300t - 16^\circ) \text{ A}$. The voltage \underline{u} is to be determined across the $4.68 \text{ m}\Omega$ resistor.

Result: $\underline{u} = 1.98 \text{ V} \angle -16^\circ$

Solution: The current \underline{i} is given by $i(t) = 0.24 \cos(300t - 16^\circ) \text{ A}$. The voltage \underline{u} is to be determined across the $4.68 \text{ m}\Omega$ resistor.


Result: $\underline{u} = 1.98 \text{ V} \angle -16^\circ$

```

\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} \quad \omega = 2\pi f = 2\pi \cdot 15 \\
\omega &= 2\pi \cdot 15 = 94.2 \text{ rad/s} \\
\begin{align*} I &= \frac{U}{Z} = \frac{10}{\sqrt{R^2 + X^2}} \\
\begin{align*} Z_C &= \frac{1}{2\pi \cdot 15 \cdot 330 \cdot 10^{-6}} \\
\end{align*}
\end{align*}
\end{align*}
\underline{Z} = R + j\underline{Z}_L + \underline{Z}_C \quad \underline{Z} = R + j\underline{Z}_L - j\underline{Z}_C \\
|\underline{Z}| = \sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2}

```

□□□□□□□□ □510...

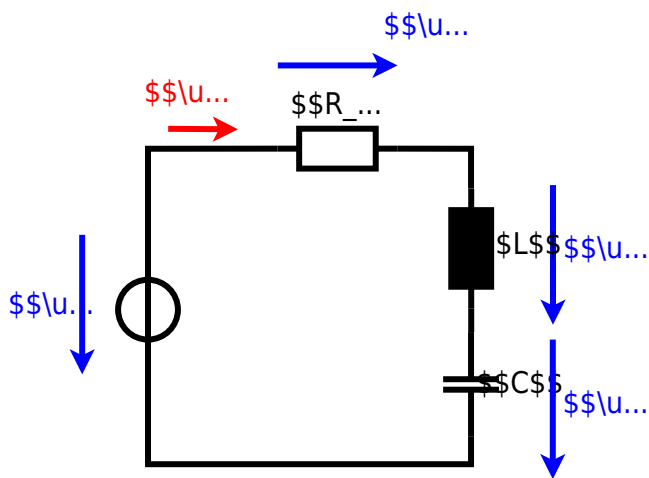

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad | \quad R &= \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$


~~#@ee1_taskctr.#~~

Exercise E4 Charging Capacitors
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the real battery) also takes into account the internal resistance of the battery. The voltage across the capacitor is again $U_c(t_0) = 0 \text{ V}$ at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution
Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution
The ideal voltage source U is in series with the voltage $U_1 = \frac{U \cdot R_2}{R_1 + R_2}$ and the internal resistance R_1 is in parallel with the capacitor. On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

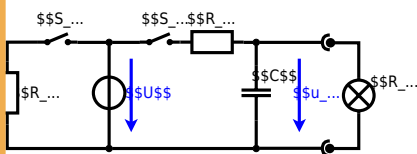


The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ } \Omega$ and a capacitor of $C = 100 \text{ } \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first asks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

- 1. First do not consider the light bulb - it is not connected to the RC circuit.
- 2. Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

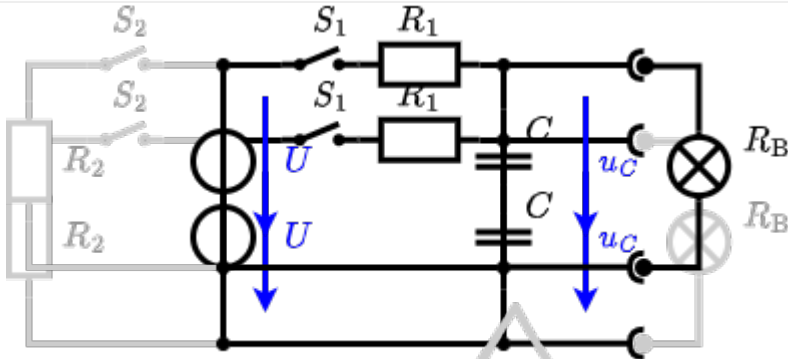

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_C(t)$ which has to be $u_C(t_1) = 0.5 \cdot U$:

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$



An equivalent linear voltage source can be given with U , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$
 The internal resistance is given by substituting the ideal voltage source with its resistance ($R_i = 0 \Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms}/(10 \Omega \cdot 100 \mu\text{F})})$$


~~#@ee1_taskctr.#~~

Exercise E1 Pure Resistor Network Simplification
 (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 0h00 on the 01.12.2022. $R_1 = R_2 = R_3 = 10 \Omega$ and the voltage source $U = 10 \text{V}$.
 Result given: R_B .

Solution

$R_2 = R_3 = 100 \Omega$

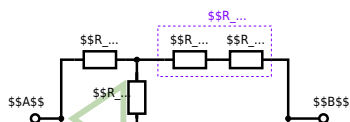

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{eq} = R_Y + (R_Y + R_1) \parallel (R_Y + R_2) = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

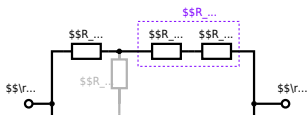

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel R_{\text{eq}} = \{500 \sim \Omega\} \parallel (200 \sim \Omega) \parallel R_{\text{eq}} = \{500 \sim \Omega \cdot 200 \sim \Omega\} \over {500 \sim \Omega + 200 \sim \Omega}$$

From: <https://wiki.mexle.org/> - MEXLE Wiki

Permanent link: https://wiki.mexle.org/electrical_engineering_1/ws2022_exam?rev=1678504927

Last update: 2023/03/11 04:22

