

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exercise E5 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	3
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	6
Exercise E7 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	7
Exercise E10 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	7
Exercise E8 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	11
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	11
Exercise E6 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)	12
Exercise E4 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	13
Exercise E2 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	15
Exercise E3 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	19
Exercise E1 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	20
Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	20
Exercise E9 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	24
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	24
Exercise E1 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,	


WS2022)	25
Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	26

d

**Exercise E5 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result

$$\begin{aligned} U_{\text{rs}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} = 6 \text{ } \Omega \end{aligned}$$

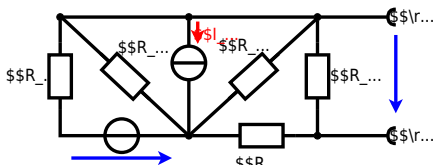


Calculate the internal resistance R_{i} and the source voltage U_{rs} of an equivalent linear voltage source on the connectors A and B .
 $R_1=5.0 \text{ } \Omega$, $U_2=6.0 \text{ V}$, $R_3= 10 \text{ } \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \text{ } \Omega$, $R_6=7.5 \text{ } \Omega$, $R_7=15 \text{ } \Omega$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

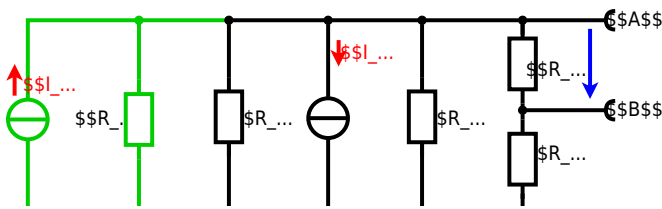

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135}$$

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - (U_2 \over R_1 - I_4) \cdot R_1 || R_3 || R_5$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \Omega \cdot \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega}$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

d

Exercise E2 Temperature-dependent Resistance
(written test, approx. 6 % of a 60-minute written test, WS2022)

2. The graph shows the temperature dependence of the resistance of a resistor. The resistor has a resistance of $10 \text{ k}\Omega$ at 25°C . Calculate the resistance of the thermistor at -40°C .

Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

Result: The temperature inside the refrigeration system can reach down to -40°C . Calculate the resistance of the thermistor at -40°C .

Resistor transfer resistor $P = U \cdot I$ and $P = \frac{U^2}{R}$ and $P = I^2 \cdot R$. Therefore, a solution is to increase the heat flow up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

with $\Delta T = T_{\text{end}} - T_{\text{start}}$

$$R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

d

Exercise E7 Analyzing complex Impedances
(written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage \underline{u} across the $30 \mu\text{F}$ capacitor in the circuit shown in the figure. The current i is given by $i(t) = 3.0 \sin(2\pi \cdot 15 t)$ A. The voltage source is $u_s(t) = 3.0 \sin(2\pi \cdot 15 t)$ V. The circuit consists of a $30 \mu\text{F}$ capacitor, a $330 \mu\text{H}$ inductor, and a $30 \mu\text{F}$ capacitor in series.

Result: $\underline{u} = 48.2 \angle -19.8^\circ \text{ V}$

Solution: The circuit consists of a $30 \mu\text{F}$ capacitor, a $330 \mu\text{H}$ inductor, and a $30 \mu\text{F}$ capacitor in series. The total impedance is $Z = j\omega L + \frac{1}{j\omega C} + \frac{1}{j\omega C} = j\omega L + \frac{2}{j\omega C}$. Substituting the values, we get $Z = j(2\pi \cdot 15) \cdot 330 \cdot 10^{-6} + \frac{2}{j(2\pi \cdot 15) \cdot 30 \cdot 10^{-6}}$.

Result: $\underline{u} = 48.2 \angle -19.8^\circ \text{ V}$

Solution: The current i is given by $i(t) = 3.0 \sin(2\pi \cdot 15 t)$ A. The voltage source is $u_s(t) = 3.0 \sin(2\pi \cdot 15 t)$ V. The circuit consists of a $30 \mu\text{F}$ capacitor, a $330 \mu\text{H}$ inductor, and a $30 \mu\text{F}$ capacitor in series.

Result: $\underline{u} = 48.2 \angle -19.8^\circ \text{ V}$

Solution: The current i is given by $i(t) = 3.0 \sin(2\pi \cdot 15 t)$ A. The voltage source is $u_s(t) = 3.0 \sin(2\pi \cdot 15 t)$ V. The circuit consists of a $30 \mu\text{F}$ capacitor, a $330 \mu\text{H}$ inductor, and a $30 \mu\text{F}$ capacitor in series.

Result: $\underline{u} = 48.2 \angle -19.8^\circ \text{ V}$

Solution: The current i is given by $i(t) = 3.0 \sin(2\pi \cdot 15 t)$ A. The voltage source is $u_s(t) = 3.0 \sin(2\pi \cdot 15 t)$ V. The circuit consists of a $30 \mu\text{F}$ capacitor, a $330 \mu\text{H}$ inductor, and a $30 \mu\text{F}$ capacitor in series.

Result: $\underline{u} = 48.2 \angle -19.8^\circ \text{ V}$

Solution: The current i is given by $i(t) = 3.0 \sin(2\pi \cdot 15 t)$ A. The voltage source is $u_s(t) = 3.0 \sin(2\pi \cdot 15 t)$ V. The circuit consists of a $30 \mu\text{F}$ capacitor, a $330 \mu\text{H}$ inductor, and a $30 \mu\text{F}$ capacitor in series.

Result: $\underline{u} = 48.2 \angle -19.8^\circ \text{ V}$

d

Exercise E10 Complex Impedance Circuit
(written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the steady-state phasor voltage \underline{u} across the $30 \mu\text{F}$ capacitor in the circuit shown in the figure. The current i is given by $i(t) = 3.0 \sin(2\pi \cdot 15 t)$ A. The voltage source is $u_s(t) = 3.0 \sin(2\pi \cdot 15 t)$ V. The circuit consists of a $30 \mu\text{F}$ capacitor, a $330 \mu\text{H}$ inductor, and a $30 \mu\text{F}$ capacitor in series.

Result: $\underline{u} = 48.2 \angle -19.8^\circ \text{ V}$

Solution: The current i is given by $i(t) = 3.0 \sin(2\pi \cdot 15 t)$ A. The voltage source is $u_s(t) = 3.0 \sin(2\pi \cdot 15 t)$ V. The circuit consists of a $30 \mu\text{F}$ capacitor, a $330 \mu\text{H}$ inductor, and a $30 \mu\text{F}$ capacitor in series.

Result: $\underline{u} = 48.2 \angle -19.8^\circ \text{ V}$

```

\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} \quad \omega = 2\pi f = 2\pi \cdot 15 \\
\omega &= 94.2 \text{ rad/s} \\
\end{align*}
\begin{align*} Z_L &= 2\pi f L = 2\pi \cdot 15 \cdot 330 \cdot 10^{-6} \\
&= 3.16 \text{ } \Omega \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} \quad \omega = 2\pi \cdot 15 \\
&= 330 \text{ } \mu\text{H} \\
\end{align*}
\begin{align*} \underline{Z} &= R + \underline{Z}_L + \underline{Z}_C \\
&= R + j\omega L - j\omega C \\
|\underline{Z}| &= \sqrt{R^2 + (\omega L - \omega C)^2} \\
\end{align*}

```

□□□□□□□□ □510...



d

Exercise E8 Impedances at different Frequencies
(written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit means that the current is constant on every component.
The equivalent impedance for R and L combined is given by $Z = \sqrt{R^2 + X_L^2}$
Parallel circuit means that the voltage is the same on R and C
Since $X_C = 1 / (\omega C)$ is perpendicular to R , this can be simplified to $Z = \sqrt{R^2 + X_C^2}$
Therefore, the resulting current of the parallel circuit is given as:
 $I_{total} = I_R + I_C$
 $I_{total} = \frac{U}{R} + \frac{U}{X_C}$
Back to the first formula: $R \cdot I_{total} = X_C \cdot I_{total} \cdot \frac{R}{X_C}$
 $R = X_C \cdot \frac{R}{X_C}$

Solution

$R_1 = 1.00 \cdot \omega$

$R_2 = 10.0 \cdot \omega$

A series circuit means that the current is constant on every component.
The equivalent impedance for R and L combined is given by $Z = \sqrt{R^2 + X_L^2}$
Parallel circuit means that the voltage is the same on R and C
Since $X_C = 1 / (\omega C)$ is perpendicular to R , this can be simplified to $Z = \sqrt{R^2 + X_C^2}$
Therefore, the resulting current of the parallel circuit is given as: $I_{total} = I_R + I_C$
 $I_{total} = \frac{U}{R} + \frac{U}{X_C}$
Back to the first formula: $R \cdot I_{total} = X_C \cdot I_{total} \cdot \frac{R}{X_C}$
 $R = X_C \cdot \frac{R}{X_C}$

d

Exercise E1 Resistance of a Wire by Resistivity
(written test, approx. 6 % of a 60-minute written test, WS2022)

The heating element is used to heat the wire with a temperature of 1800 K. The electric power dissipation (= heat flow) of $P=40 \text{ W}$ is necessary.
Calculate the current I needed to operate for heating elements.
The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6} \cdot \Omega \cdot \text{m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .

∴ Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$


d

Exercise E6 Charging Capacitors
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the real battery) also takes into account the internal resistance of the battery. The voltage across the capacitor is again $U_c(t_2)$ at the moment $t_2 = 1 \text{ ms}$ after closing the switch. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution
Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution
The ideal voltage source U is in series with the internal resistance R_1 and the external resistance R_2 . The voltage across the capacitor is again $U_c(t_2)$ at the moment $t_2 = 1 \text{ ms}$ after closing the switch. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

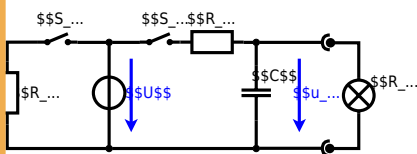


The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ } \Omega$ and a capacitor of $C = 100 \text{ } \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first asks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

- 1. First do not consider the light bulb - it is not connected to the RC circuit.
- 2. Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

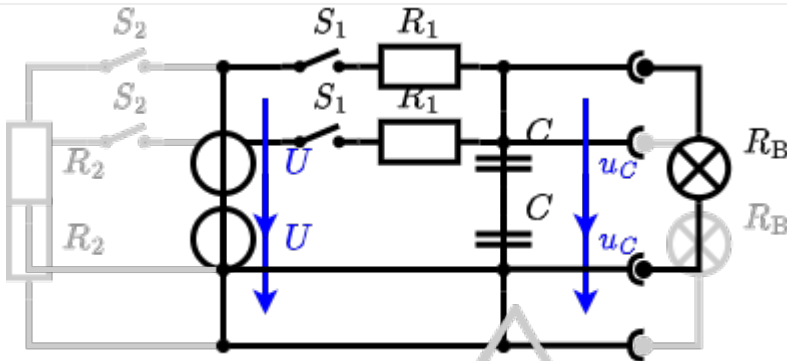

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_C(t)$ which has to be $u_C(t_1) = 0.5 \cdot U$:

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$



An equivalent linear voltage source can be given with U , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$
 The internal resistance is given by substituting the ideal voltage source with its resistance ($R_i = 0 \Omega$, short-circuit).
 $R_i = R_1 \parallel R_B = 10 \Omega$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms} / (10 \Omega \cdot 100 \mu\text{F})})$$


d

Exercise E4 Pure Resistor Network Simplification
 (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 0°C. $R_1 = R_2 = R_3 = 10 \Omega$, $R_4 = 1 \Omega$, $R_5 = 1 \Omega$, $R_6 = 1 \Omega$, $R_7 = 1 \Omega$, $R_8 = 1 \Omega$, $R_9 = 1 \Omega$, $R_{10} = 1 \Omega$, $R_{11} = 1 \Omega$, $R_{12} = 1 \Omega$, $R_{13} = 1 \Omega$, $R_{14} = 1 \Omega$, $R_{15} = 1 \Omega$, $R_{16} = 1 \Omega$, $R_{17} = 1 \Omega$, $R_{18} = 1 \Omega$, $R_{19} = 1 \Omega$, $R_{20} = 1 \Omega$, $R_{21} = 1 \Omega$, $R_{22} = 1 \Omega$, $R_{23} = 1 \Omega$, $R_{24} = 1 \Omega$, $R_{25} = 1 \Omega$, $R_{26} = 1 \Omega$, $R_{27} = 1 \Omega$, $R_{28} = 1 \Omega$, $R_{29} = 1 \Omega$, $R_{30} = 1 \Omega$, $R_{31} = 1 \Omega$, $R_{32} = 1 \Omega$, $R_{33} = 1 \Omega$, $R_{34} = 1 \Omega$, $R_{35} = 1 \Omega$, $R_{36} = 1 \Omega$, $R_{37} = 1 \Omega$, $R_{38} = 1 \Omega$, $R_{39} = 1 \Omega$, $R_{40} = 1 \Omega$, $R_{41} = 1 \Omega$, $R_{42} = 1 \Omega$, $R_{43} = 1 \Omega$, $R_{44} = 1 \Omega$, $R_{45} = 1 \Omega$, $R_{46} = 1 \Omega$, $R_{47} = 1 \Omega$, $R_{48} = 1 \Omega$, $R_{49} = 1 \Omega$, $R_{50} = 1 \Omega$, $R_{51} = 1 \Omega$, $R_{52} = 1 \Omega$, $R_{53} = 1 \Omega$, $R_{54} = 1 \Omega$, $R_{55} = 1 \Omega$, $R_{56} = 1 \Omega$, $R_{57} = 1 \Omega$, $R_{58} = 1 \Omega$, $R_{59} = 1 \Omega$, $R_{60} = 1 \Omega$, $R_{61} = 1 \Omega$, $R_{62} = 1 \Omega$, $R_{63} = 1 \Omega$, $R_{64} = 1 \Omega$, $R_{65} = 1 \Omega$, $R_{66} = 1 \Omega$, $R_{67} = 1 \Omega$, $R_{68} = 1 \Omega$, $R_{69} = 1 \Omega$, $R_{70} = 1 \Omega$, $R_{71} = 1 \Omega$, $R_{72} = 1 \Omega$, $R_{73} = 1 \Omega$, $R_{74} = 1 \Omega$, $R_{75} = 1 \Omega$, $R_{76} = 1 \Omega$, $R_{77} = 1 \Omega$, $R_{78} = 1 \Omega$, $R_{79} = 1 \Omega$, $R_{80} = 1 \Omega$, $R_{81} = 1 \Omega$, $R_{82} = 1 \Omega$, $R_{83} = 1 \Omega$, $R_{84} = 1 \Omega$, $R_{85} = 1 \Omega$, $R_{86} = 1 \Omega$, $R_{87} = 1 \Omega$, $R_{88} = 1 \Omega$, $R_{89} = 1 \Omega$, $R_{90} = 1 \Omega$, $R_{91} = 1 \Omega$, $R_{92} = 1 \Omega$, $R_{93} = 1 \Omega$, $R_{94} = 1 \Omega$, $R_{95} = 1 \Omega$, $R_{96} = 1 \Omega$, $R_{97} = 1 \Omega$, $R_{98} = 1 \Omega$, $R_{99} = 1 \Omega$, $R_{100} = 1 \Omega$.
 Result given: R_B .

Solution

R_{eq} between A and B

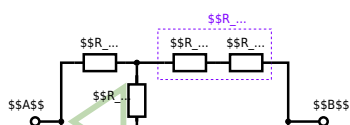

Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{eq} = R_Y + (R_Y + R_1) \parallel (R_Y + R_2) = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B.

Solution

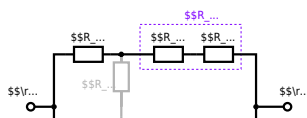

The equivalent resistor is given by a parallel configuration of resistors in series:


$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel R_{\text{eq}}$$

d

**Exercise E2 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result

$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

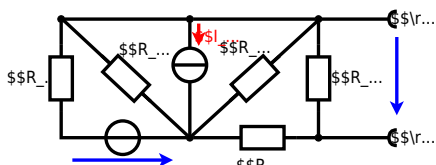


Calculated the internal resistance R_{int} and the source voltage U_{oc} of an equivalent linear voltage source on the connectors A and B . $R_1=5.0 \text{ }\Omega$, $U_2=6.0 \text{ V}$, $R_3= 10 \text{ }\Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \text{ }\Omega$, $R_6=7.5 \text{ }\Omega$, $R_7=15 \text{ }\Omega$ Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

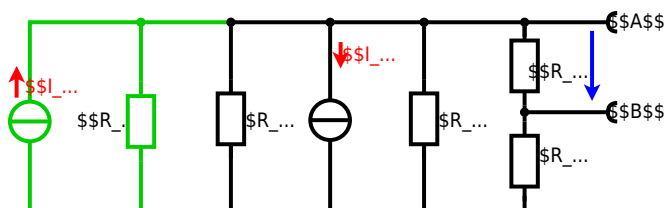

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot (R_6 + R_7)$$

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left(\frac{U_2}{R_1} - I_4 \right) \cdot \left(\frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5} \right)$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \left(\frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \right) \cdot \left(\frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

d

Exercise E3 Temperature-dependent Resistance
(written test, approx. 6 % of a 60-minute written test, WS2022)

2. The graph shows the temperature dependence of the resistance of a resistor. The resistor has a resistance of $10 \text{ k}\Omega$ at 25°C . Calculate the resistance of the thermistor at -40°C .

Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

The temperature inside the refrigeration system can reach down to -40°C .

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

Resistance of the resistor R depends on the temperature T and the heat Q . Therefore, a solution is to use a heat pump to heat up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

with $\Delta T = T_{\text{end}} - T_{\text{start}}$

$$R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

d

Exercise E1 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage \underline{u} across the $4.68 \text{ m}\Omega$ resistor in the circuit shown in the figure. The current \underline{i} is given by $i(t) = 0.24 \cos(300t - 16^\circ) \text{ A}$. The voltage \underline{u} is to be determined across the $4.68 \text{ m}\Omega$ resistor.

Result: $\underline{u} = 1.19 \text{ V} \angle -71.06^\circ$

Solution: The current \underline{i} is given by $i(t) = 0.24 \cos(300t - 16^\circ) \text{ A}$. The voltage \underline{u} is to be determined across the $4.68 \text{ m}\Omega$ resistor.

Result: $\underline{u} = 1.19 \text{ V} \angle -71.06^\circ$

Solution: The current \underline{i} is given by $i(t) = 0.24 \cos(300t - 16^\circ) \text{ A}$. The voltage \underline{u} is to be determined across the $4.68 \text{ m}\Omega$ resistor.

Result: $\underline{u} = 1.19 \text{ V} \angle -71.06^\circ$

Solution: The current \underline{i} is given by $i(t) = 0.24 \cos(300t - 16^\circ) \text{ A}$. The voltage \underline{u} is to be determined across the $4.68 \text{ m}\Omega$ resistor.

Result: $\underline{u} = 1.19 \text{ V} \angle -71.06^\circ$

Solution: The current \underline{i} is given by $i(t) = 0.24 \cos(300t - 16^\circ) \text{ A}$. The voltage \underline{u} is to be determined across the $4.68 \text{ m}\Omega$ resistor.

Result: $\underline{u} = 1.19 \text{ V} \angle -71.06^\circ$

Solution: The current \underline{i} is given by $i(t) = 0.24 \cos(300t - 16^\circ) \text{ A}$. The voltage \underline{u} is to be determined across the $4.68 \text{ m}\Omega$ resistor.

Result: $\underline{u} = 1.19 \text{ V} \angle -71.06^\circ$

d

Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the resulting phasor voltage \underline{u} across the $4.68 \text{ m}\Omega$ resistor in the circuit shown in the figure. The current \underline{i} is given by $i(t) = 0.24 \cos(300t - 16^\circ) \text{ A}$. The voltage \underline{u} is to be determined across the $4.68 \text{ m}\Omega$ resistor.

Result: $\underline{u} = 1.19 \text{ V} \angle -71.06^\circ$

Solution: The current \underline{i} is given by $i(t) = 0.24 \cos(300t - 16^\circ) \text{ A}$. The voltage \underline{u} is to be determined across the $4.68 \text{ m}\Omega$ resistor.

Result: $\underline{u} = 1.19 \text{ V} \angle -71.06^\circ$

```

\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} \quad \omega = 2\pi \cdot 15 \\
\omega &= 2\pi \cdot 15 \cdot 10^{-3} = 0.942 \text{ rad/s} \\
\begin{align*} I &= \frac{U}{Z} = \frac{10}{\sqrt{R^2 + \left(\frac{1}{\omega C}\right)^2}} \\
&= \frac{10}{\sqrt{3^2 + \left(\frac{1}{0.942 \cdot 10^{-6}}\right)^2}} \\
&= 19.28 \text{ ~}\Omega\text{}} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi \cdot 15 \cdot 10^{-3} \cdot 330 \cdot 10^{-6}} \\
&= 251.6 \text{ ~}\Omega\text{}} \\
\end{align*}
\underline{Z} = R + j\underline{Z}_L + \underline{Z}_C \quad \underline{Z} = R + j \\
\cdot \underline{Z}_L - j \cdot \underline{Z}_C \quad \underline{Z} = R + j(\underline{Z}_L - \underline{Z}_C) \quad |\underline{Z}| = \\
\sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2}

```

□□□□□□□□ □510...



d

Exercise E9 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit means that the current is constant on every component.
 The equivalent impedance for R and L combined is given by $Z = \sqrt{R^2 + X_L^2}$
 Parallel circuit means that the voltage is the same on R_1 and C_1
 Budget in the parallel circuit: $X_C = \frac{1}{\omega C}$ since ω and C are perpendicular
 $X_C = \frac{1}{2\pi \cdot 40 \cdot 10^{-9}} = 398 \text{ } \Omega$ (It has to, since R_3 is perpendicular to X_C)
 $Z = \sqrt{R_2^2 + X_C^2} = \sqrt{100^2 + 398^2} = 408 \text{ } \Omega$
 Therefore the resulting current of the parallel circuit is given as:
 $I_{3C} = \frac{U}{Z} = \frac{10}{408} = 24.5 \text{ mA}$
 Back to the first formula: $R_3 \cdot I_{3C} = X_C \cdot I_{3C} \cdot \frac{I_{3C}}{I_{3R}}$
 $R_3 = X_C \cdot \frac{I_{3C}}{I_{3R}} = 398 \cdot \frac{24.5}{100} = 97.5 \text{ } \Omega$

Solution

$R_1 = 100 \text{ } \Omega$

$R_2 = 100 \text{ } \Omega$

A series circuit means that the current is constant on every component.
 The equivalent impedance for R and L combined is given by $Z = \sqrt{R^2 + X_L^2}$
 Parallel circuit means that the voltage is the same on R_1 and C_1
 Budget in the parallel circuit: $X_C = \frac{1}{\omega C}$ since ω and C are perpendicular
 $X_C = \frac{1}{2\pi \cdot 40 \cdot 10^{-9}} = 398 \text{ } \Omega$ (It has to, since R_3 is perpendicular to X_C)
 $Z = \sqrt{R_2^2 + X_C^2} = \sqrt{100^2 + 398^2} = 408 \text{ } \Omega$
 Therefore the resulting current of the parallel circuit is given as:
 $I_{3C} = \frac{U}{Z} = \frac{10}{408} = 24.5 \text{ mA}$
 Back to the first formula: $R_3 \cdot I_{3C} = X_C \cdot I_{3C} \cdot \frac{I_{3C}}{I_{3R}}$
 $R_3 = X_C \cdot \frac{I_{3C}}{I_{3R}} = 398 \cdot \frac{24.5}{100} = 97.5 \text{ } \Omega$

d

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

The heating element is used to heat the wire with a temperature of $1800 \text{ } ^\circ\text{C}$.
 Result: power dissipation (= heat flow) of $P=40 \text{ W}$ is necessary.

Determine the current I in the heating element.
 The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6} \text{ } \Omega\text{m}$.
 The heating element is 3 m long and has a diameter of 3.57 mm .
 Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad | \quad R &= \rho \cdot \frac{l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$


d

Exercise E1 Charging Capacitors
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the real battery) also takes into account the internal resistance of the battery. The voltage across the capacitor is again $U_c(t_2)$ at the moment $t_2 = 1 \text{ ms}$ after closing the switch. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution
To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution
The ideal voltage source U is in series with the internal resistance R_1 and the external resistance R_2 . The voltage across the capacitor is again $U_c(t_2)$ at the moment $t_2 = 1 \text{ ms}$ after closing the switch. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

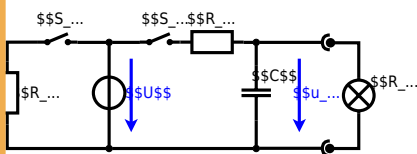


The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ } \Omega$ and a capacitor of $C = 100 \text{ } \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first asks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

- 1. First do not consider the light bulb - it is not connected to the RC circuit.
- 2. Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

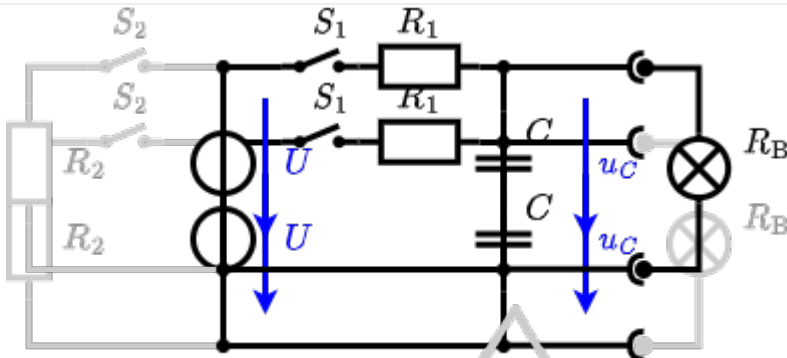

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_C(t)$ which has to be $u_C(t_1) = 0.5 \cdot U$:

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$



An equivalent linear voltage source can be given with U , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$
 The internal resistance is given by substituting the ideal voltage source with its resistance ($R_i = 0 \Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms}/(10 \Omega \cdot 100 \mu\text{F})})$$


d

Exercise E1 Pure Resistor Network Simplification
 (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 0.01 sec, $R_1 = R_2 = R_3 = 10 \Omega$ and the voltage between B and B' shall be given.

Solution

R_{eq} between A and B

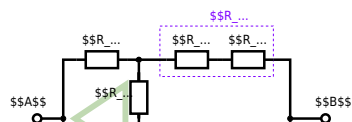

Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{eq} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B.

Solution

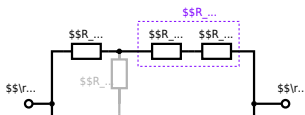

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel R_{\text{eq}} = \{500 \sim \Omega \cdot 200 \sim \Omega\} \over {500 \sim \Omega + 200 \sim \Omega}$$

From: <https://wiki.mexle.org/> - MEXLE Wiki

Permanent link: https://wiki.mexle.org/electrical_engineering_1/ws2022_exam?rev=1678504982

Last update: 2023/03/11 04:23

