

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 3

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 6

Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) 7

Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) 7

Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) 11

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) 11

Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) 12

Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) 13

Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 15

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 19

Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) 20

Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) 20

Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) 24

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) 24

Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,

WS2022) 25


Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute
written test, WS2022) 26

start

**Exercise E1 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result


$$\begin{aligned} U_{\text{rs}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} = 6 \text{ } \Omega \end{aligned}$$

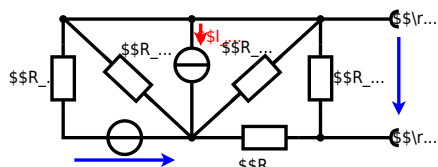


Calculated the internal resistance R_{i} and the source voltage U_{rs} of an equivalent linear voltage source on the connectors A and B .
$$R_1=5.0 \text{ } \Omega, \quad U_2=6.0 \text{ V}, \quad R_3= 10 \text{ } \Omega, \quad I_4=4.2 \text{ A}, \quad R_5=10 \text{ } \Omega, \quad R_6=7.5 \text{ } \Omega, \quad R_7=15 \text{ } \Omega$$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

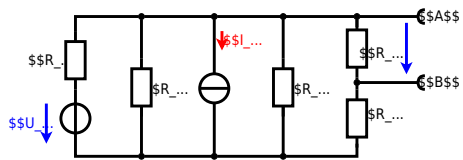

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

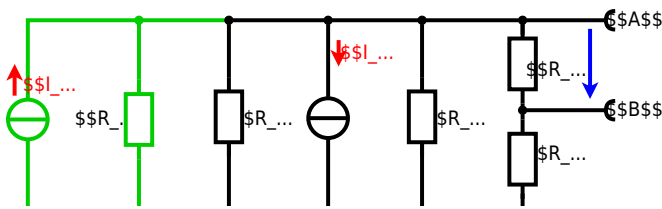

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{67}$$

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} = (U_2 - U_4) \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5}$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} = (U_2 - U_4) \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \Omega \cdot \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} || R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

endstart

Exercise E2 Temperature-dependent Resistance
(written test, approx. 6 % of a 60-minute written test, WS2022)

2. The diagram shows a circuit with a constant voltage source U_0 and a resistor R_0 in series with a resistor R whose resistance depends on the temperature T . The circuit is connected to a refrigerator with a temperature $T = -40 \text{ }^\circ\text{C}$. The resistor R is made of a material with a temperature coefficient of resistance $\alpha = 0.01 \text{ }^\circ\text{C}^{-1}$ and a reference resistance $R_0 = 10 \text{ k}\Omega$ at $T_0 = 25 \text{ }^\circ\text{C}$. Calculate the power P dissipated in the resistor R at $T = -40 \text{ }^\circ\text{C}$.

Its temperature coefficients are: $\alpha = 0.01 \text{ }^\circ\text{C}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ }^\circ\text{C}^{-2}$.

Result
 The temperature inside the refrigeration system can reach down to $-40 \text{ }^\circ\text{C}$.
 Calculate the resistance of the thermistor at $-40 \text{ }^\circ\text{C}$.

The power P dissipated in the resistor R is given by $P = U^2 / R$. Therefore, a solution is to increase the resistance R up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad | \quad \text{with } \Delta T = T_{\text{end}} - T_{\text{start}}$$

$$R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ }^\circ\text{C}^{-1} \cdot (-40 \text{ }^\circ\text{C} - 25 \text{ }^\circ\text{C}) + 71 \cdot 10^{-6} \text{ }^\circ\text{C}^{-2} \cdot (-40 \text{ }^\circ\text{C} - 25 \text{ }^\circ\text{C})^2 \right)$$

endstart

Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage \underline{u} (in V) of the $30 \mu\text{F}$ capacitor in the circuit. The components R and X_L shall be given.

After analysis, the following phasor voltage \underline{u} is extracted: $\underline{u} = 48.2 \angle -19.8^\circ$ in V. The circuit is shown in the figure below.

Solution
.. Calculate the physical values of the components.
Solution $R = 10 \Omega$, $X_L = 20 \Omega$, $X_C = 15 \Omega$

Solution
$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ}{10 + j20 - j15} = \frac{50 \angle 0^\circ}{10 + j5} = 4.47 \angle -26.1^\circ$$

The current $i(t) = 4.47 \cos(\omega t - 26.1^\circ)$ A.
The voltage across the capacitor is $\underline{u} = \underline{I} \cdot X_C = 4.47 \angle -26.1^\circ \cdot 15 \angle -90^\circ = 67.05 \angle -116.1^\circ$ V.
With the complex part comes the complex value $\underline{u} = 67.05 \angle -116.1^\circ$ V.
The phase φ can be calculated as $\varphi = \arctan\left(\frac{\text{Im}(\underline{u})}{\text{Re}(\underline{u})}\right) = \arctan\left(\frac{-67.05 \sin(116.1^\circ)}{67.05 \cos(116.1^\circ)}\right) = 19.8^\circ$

endstart

Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the resulting phasor voltage \underline{u} (in V) of the $30 \mu\text{F}$ capacitor in the circuit. The components R and X_L shall be given. The circuit is shown in the figure below.


Solution
.. Draw the circuit diagram of the given circuit. Label all components, voltages, and currents.

```

\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} \quad \omega = 2\pi f = 2\pi \cdot 15 \\
\omega &= 2\pi \cdot 15 = 94.2 \text{ rad/s} \\
\begin{align*} I &= \frac{U}{Z} = \frac{100}{\sqrt{R^2 + \left(\frac{1}{\omega C}\right)^2}} \\
&= \frac{100}{\sqrt{30^2 + \left(\frac{1}{94.2 \cdot 10^{-6}}\right)^2}} \\
&= 19.28 \text{ A} \approx 19.28 \text{ A} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} = \frac{1}{2\pi \cdot 15 \cdot 10^{-6}} \\
&= 569.8 \text{ } \Omega \\
\end{align*}
\begin{align*} \underline{Z} &= R + j\underline{Z}_L + \underline{Z}_C \\
&= 30 + j30 + j569.8 \\
&= 30 + j600 \text{ } \Omega \\
|\underline{Z}| &= \sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2} \\
&= \sqrt{30^2 + (600 - 30)^2} \\
&= 598.3 \text{ } \Omega
\end{align*}

```

□□□□□□□□ □510...

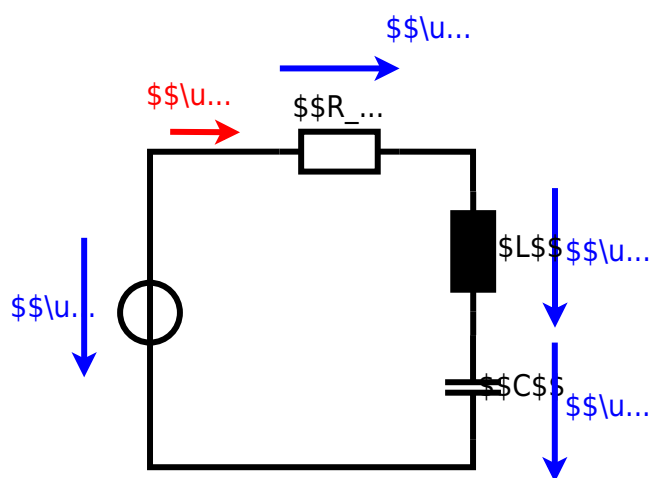

endstart

Exercise E6 Impedances at different Frequencies
(written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit means that the current is constant on every component.
The equivalent impedance for R and L combined is given by $Z = \sqrt{R^2 + X_L^2}$
Parallel circuit means that the voltage is the same on R and C
Since $X_C = 1 / (\omega C)$ is perpendicular to R, this can be simplified to $Z = \sqrt{R^2 + X_C^2}$
Therefore the resulting current of the parallel circuit is given as:
 $I_{total} = I_R + I_C$
 $I_{total} = \frac{U}{R} + \frac{U}{X_C}$
Back to the first formula: $R \cdot I_{total} = X_C \cdot I_{total} \cdot \frac{I_{total}}{I_{total}}$
 $R = X_C \cdot \frac{I_{total}}{I_{total}}$

Solution

$R_1 = 1.00 \cdot \Omega$

$R_2 = 10.0 \cdot \Omega$

A series circuit means that the current is constant on every component.
The equivalent impedance for R and L combined is given by $Z = \sqrt{R^2 + X_L^2}$
Parallel circuit means that the voltage is the same on R and C
Since $X_C = 1 / (\omega C)$ is perpendicular to R, this can be simplified to $Z = \sqrt{R^2 + X_C^2}$
Therefore the resulting current of the parallel circuit is given as:
 $I_{total} = I_R + I_C$
 $I_{total} = \frac{U}{R} + \frac{U}{X_C}$
Back to the first formula: $R \cdot I_{total} = X_C \cdot I_{total} \cdot \frac{I_{total}}{I_{total}}$
 $R = X_C \cdot \frac{I_{total}}{I_{total}}$

endstart

Exercise E1 Resistance of a Wire by Resistivity
(written test, approx. 6 % of a 60-minute written test, WS2022)

The heating element is used to heat the wire with a temperature of 1800 K. Electric power dissipation (= heat flow) of $P=40 \text{ W}$ is necessary.
Calculate the current I needed to operate for heating elements.
The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6} \cdot \Omega \cdot \text{m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .

Solution: $R = 10^{-3} \cdot \Omega$

Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad | \quad R &= \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

endstart

Exercise E4 Charging Capacitors
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the real battery) also takes into account the internal resistance R_1 of the battery. The capacitor C is initially charged to a voltage $U_0 = 20 \text{ V}$. The voltage across the capacitor is again U_0 at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution
Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution
The ideal voltage source U is in series with the internal resistance R_1 and the external resistance R_2 . The voltage across the capacitor is $u_c(t) = U \cdot \exp(-t/RC)$.
On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .




The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ } \Omega$ and a capacitor of $C = 100 \text{ } \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first asks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

- 1. First do not consider the light bulb - it is not connected to the RC circuit.
- 2. Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

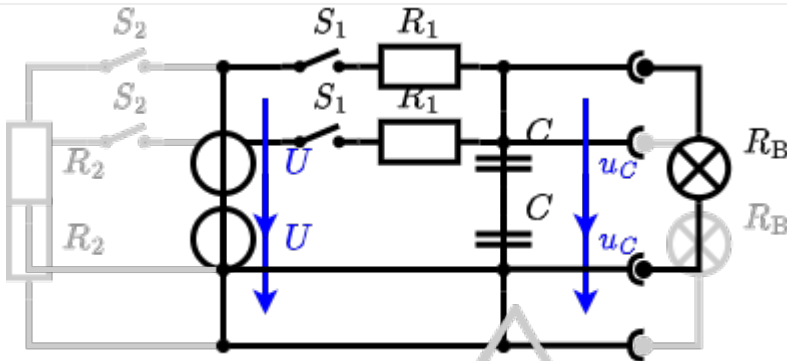

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_C(t)$ which has to be $u_C(t_1) = 0.5 \cdot U$:

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$



An equivalent linear voltage source can be given with U_s , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$
 The internal resistance is given by substituting the ideal voltage source with its resistance ($R_i = 0 \Omega$, short-circuit).
 $R_i = R_1 \parallel R_B = 10 \Omega$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms}/(10 \Omega \cdot 100 \mu\text{F})})$$


endstart

Exercise E3 Pure Resistor Network Simplification
 (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 0:00 on the 1st of June 2022. $R_1 = R_2 = R_3 = 10 \Omega$ and the voltage source $U = 10 \text{V}$.
 Result given: R_B .

Solution

$R_2 = R_3 = 100 \Omega$

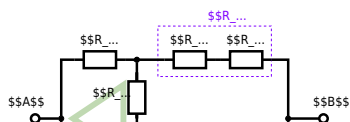

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{eq} = R_Y + (R_Y + R_1) \parallel (R_Y + R_2) \parallel R_{eq} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B.

Solution

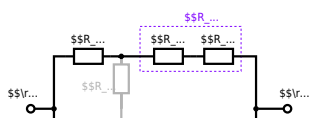

The equivalent resistor is given by a parallel configuration of resistors in series:


$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$

endstart

Exercise E3 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
 Result

$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

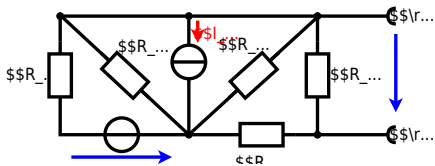


Calculate the internal resistance R_i and the source voltage U_s of an equivalent linear voltage source on the connectors A and B . $R_1=5.0 \Omega$, $U_2=6.0 \text{ V}$, $R_3=10 \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \Omega$, $R_6=7.5 \Omega$, $R_7=15 \Omega$. Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

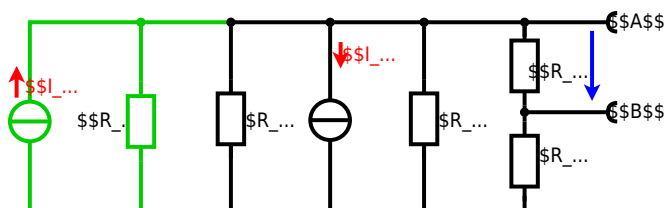

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_{24}}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{67}$$

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left(\frac{U_2}{R_1} - I_4 \right) \cdot \left(\frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5} \right)$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \left(\frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \right) \cdot \left(\frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

endstart

Exercise E2 Temperature-dependent Resistance
(written test, approx. 6 % of a 60-minute written test, WS2022)

2. The diagram shows a circuit with a constant voltage source U_0 and a resistor R_0 in series with a resistor R whose resistance depends on the temperature T . The circuit has a resistance of $10 \text{ k}\Omega$ at 25°C and $25 \text{ k}\Omega$ at 40°C . Your answer.

Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

Result The temperature inside the refrigeration system can reach down to -40°C .

$$R = 6.5 \text{ k}\Omega \text{ at } -40^\circ\text{C}$$

Resistor transfer resistor $P = U^2 / R$ and $Q = P \cdot t$ Therefore, a solution is to use a heat pump up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot \left(1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2 \right)$$

with $\Delta T = T_{\text{end}} - T_{\text{start}}$

$$R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

endstart

Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage \underline{U} and the phasor current \underline{I} in the circuit shown in the figure. The components R and X_L shall be given.

After analysis, the following phasors can be determined: $\underline{U} = 48.2 \angle -19.8^\circ \text{ V}$ and $\underline{I} = 19.8 \angle -19.8^\circ \text{ A}$.

Solution
.. Calculate the physical values of the components.
Solution $R = 10 \Omega$ and $X_L = 20 \Omega$

Solution
$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ}{10 + j20} = 1.98 \angle -19.8^\circ \text{ A}$$

The current and voltage are in phase since the circuit is purely resistive.
The voltage across the capacitor is $\underline{U}_C = \underline{I} \cdot (-j20) = -39.6 \angle -19.8^\circ \text{ V}$
The voltage across the inductor is $\underline{U}_L = \underline{I} \cdot j20 = 39.6 \angle 70.2^\circ \text{ V}$
The phase angle φ can be calculated as $\varphi = \arctan\left(\frac{-4.68}{0.24}\right) = -19.8^\circ$
With the complex part comes the complex value $\underline{U} = 48.2 \angle -19.8^\circ \text{ V}$
 $\varphi = \arctan\left(\frac{-4.68}{0.24}\right) = -19.8^\circ$
The phase angle can be calculated as $\varphi = \arctan\left(\frac{-4.68}{0.24}\right) = -19.8^\circ$

endstart

Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the resulting phasor voltage \underline{U} and the phasor current \underline{I} in the circuit shown in the figure. The components R and X_L shall be given. The voltage source is $u(t) = 3.0 \sin(2\pi \cdot 15 \cdot t) \text{ V}$.

Solution
This linear source is connected with an inductor of $330 \mu\text{H}$ and a capacitor of $30.22 \mu\text{F}$, all in series.


Result
.. Draw the circuit diagram of the given circuit.
Label all components, voltages, and currents.

```

\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} \quad \omega = 2\pi f = 2\pi \cdot 15 \\
\omega &= 94.2 \text{ rad/s} \\
\end{align*}
\begin{align*} Z_L &= 2\pi f L = 2\pi \cdot 15 \cdot 330 \cdot 10^{-6} \\
&= 3.16 \text{ } \Omega \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} \quad \omega = 2\pi f = 2\pi \cdot 15 \\
&\approx 1.1 \text{ } \Omega \\
\end{align*}
\begin{align*} \underline{Z} &= R + \underline{Z}_L + \underline{Z}_C \\
&= R + j\omega L - \frac{1}{j\omega C} \\
&= R + j(\omega L - \frac{1}{\omega C}) \\
&= \sqrt{R^2 + (\omega L - \frac{1}{\omega C})^2}
\end{align*}

```

□□□□□□□□ □510...

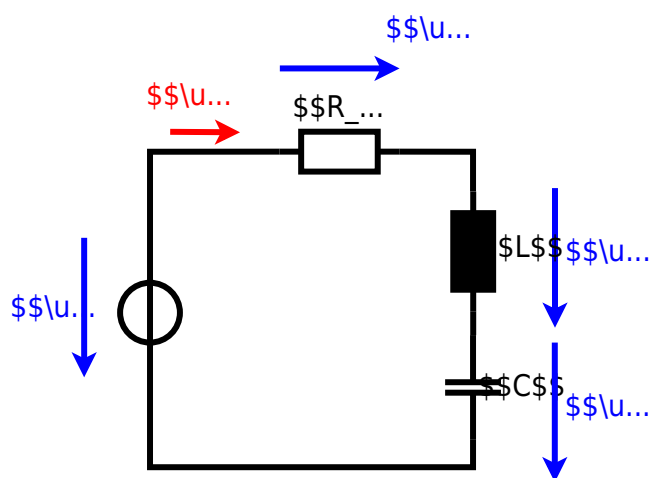

endstart

Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit means that the current is constant on every component.
 The equivalent impedance for R and L combined is given by $Z = \sqrt{R^2 + X_L^2}$
 Parallel circuit means that the voltage is the same on R_1 and C_1
 Budget in the parallel circuit: $V = I \cdot Z$ since V and I are perpendicular
 $V = I \cdot \sqrt{R_2^2 + X_C^2}$ since V and I are perpendicular
 R_2 and X_C can be simplified to R_2 (It has to, since R_3 is perpendicular to X_C)
 $I = \frac{V}{\sqrt{R_2^2 + X_C^2}}$
 Therefore the resulting current of the parallel circuit is given as:
 $I_{3C} = I_{3R} + I_{3C}$
 $I_{3C} = \frac{V}{\sqrt{R_2^2 + X_C^2}}$
 Back to the first formula: $R_3 \cdot I_{3R} = X_C \cdot I_{3C} \cdot \frac{I_{3R}}{I_{3R}}$
 $R_3 = X_C \cdot \frac{I_{3C}}{I_{3R}}$
 $R_3 = \frac{V}{I_{3R}} \cdot \frac{I_{3C}}{I_{3R}}$

Solution

$R_1 = 1.00 \cdot \Omega$

$R_2 = 10.0 \cdot \Omega$

A series circuit means that the current is constant on every component.
 The equivalent impedance for R and L combined is given by $Z = \sqrt{R^2 + X_L^2}$
 Parallel circuit means that the voltage is the same on R_1 and C_1
 Budget in the parallel circuit: $V = I \cdot Z$ since V and I are perpendicular
 $V = I \cdot \sqrt{R_2^2 + X_C^2}$ since V and I are perpendicular
 R_2 and X_C can be simplified to R_2 (It has to, since R_3 is perpendicular to X_C)
 $I = \frac{V}{\sqrt{R_2^2 + X_C^2}}$
 Therefore the resulting current of the parallel circuit is given as:
 $I_{3C} = I_{3R} + I_{3C}$
 $I_{3C} = \frac{V}{\sqrt{R_2^2 + X_C^2}}$
 Back to the first formula: $R_3 \cdot I_{3R} = X_C \cdot I_{3C} \cdot \frac{I_{3R}}{I_{3R}}$
 $R_3 = X_C \cdot \frac{I_{3C}}{I_{3R}}$
 $R_3 = \frac{V}{I_{3R}} \cdot \frac{I_{3C}}{I_{3R}}$

endstart

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

The heating element is used to heat the wire with a temperature of 180°C .
 Result power dissipation (= heat flow) of $P=40 \text{ W}$ is necessary.
 Calculate the current I needed to operate for heating elements.
 The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6} \cdot \Omega \cdot \text{m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .
 Calculate the resistance R of the heating element.

Solution

$R = 1.10 \cdot 10^{-6} \cdot \frac{L}{A}$

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad | \quad R &= \rho \cdot \frac{l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

endstart

Exercise E4 Charging Capacitors
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the real battery) also takes into account the internal resistance of the battery. The voltage across the capacitor is again $U_c(t_0) = 0 \text{ V}$ at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution
Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution
The ideal voltage source U is in series with the voltage $U_1 = \frac{U \cdot R_2}{R_1 + R_2}$ and the internal resistance R_1 . On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .




The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ } \Omega$ and a capacitor of $C = 100 \text{ } \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first asks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

- .. First do not consider the light bulb - it is not connected to the RC circuit.
- Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

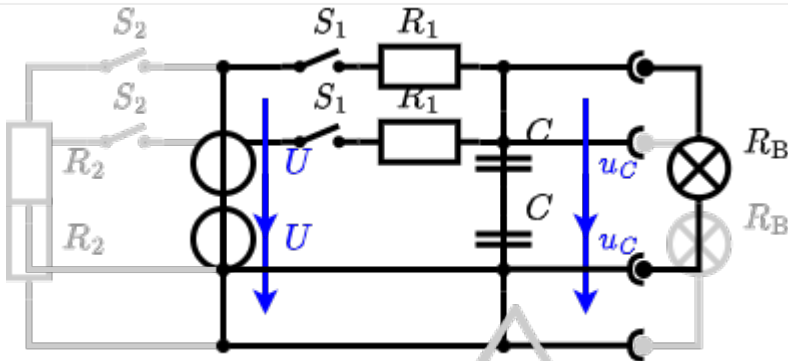

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_C(t)$ which has to be $u_C(t_1) = 0.5 \cdot U$:

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5)$$



An equivalent linear voltage source can be given with U , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$
 The internal resistance is given by substituting the ideal voltage source with its resistance ($R_i = 0 \Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms} / (10 \Omega \cdot 100 \mu\text{F})})$$


endstart

Exercise E1 Pure Resistor Network Simplification
 (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 0:00 on the 1st of June 2022. The circuit is given. $R_1 = 10 \Omega$, $R_2 = 10 \Omega$, $R_3 = 10 \Omega$, $R_4 = 10 \Omega$, $R_5 = 10 \Omega$, $R_6 = 10 \Omega$, $R_7 = 10 \Omega$, $R_8 = 10 \Omega$, $R_9 = 10 \Omega$, $R_{10} = 10 \Omega$, $R_{11} = 10 \Omega$, $R_{12} = 10 \Omega$, $R_{13} = 10 \Omega$, $R_{14} = 10 \Omega$, $R_{15} = 10 \Omega$, $R_{16} = 10 \Omega$, $R_{17} = 10 \Omega$, $R_{18} = 10 \Omega$, $R_{19} = 10 \Omega$, $R_{20} = 10 \Omega$, $R_{21} = 10 \Omega$, $R_{22} = 10 \Omega$, $R_{23} = 10 \Omega$, $R_{24} = 10 \Omega$, $R_{25} = 10 \Omega$, $R_{26} = 10 \Omega$, $R_{27} = 10 \Omega$, $R_{28} = 10 \Omega$, $R_{29} = 10 \Omega$, $R_{30} = 10 \Omega$, $R_{31} = 10 \Omega$, $R_{32} = 10 \Omega$, $R_{33} = 10 \Omega$, $R_{34} = 10 \Omega$, $R_{35} = 10 \Omega$, $R_{36} = 10 \Omega$, $R_{37} = 10 \Omega$, $R_{38} = 10 \Omega$, $R_{39} = 10 \Omega$, $R_{40} = 10 \Omega$, $R_{41} = 10 \Omega$, $R_{42} = 10 \Omega$, $R_{43} = 10 \Omega$, $R_{44} = 10 \Omega$, $R_{45} = 10 \Omega$, $R_{46} = 10 \Omega$, $R_{47} = 10 \Omega$, $R_{48} = 10 \Omega$, $R_{49} = 10 \Omega$, $R_{50} = 10 \Omega$, $R_{51} = 10 \Omega$, $R_{52} = 10 \Omega$, $R_{53} = 10 \Omega$, $R_{54} = 10 \Omega$, $R_{55} = 10 \Omega$, $R_{56} = 10 \Omega$, $R_{57} = 10 \Omega$, $R_{58} = 10 \Omega$, $R_{59} = 10 \Omega$, $R_{60} = 10 \Omega$, $R_{61} = 10 \Omega$, $R_{62} = 10 \Omega$, $R_{63} = 10 \Omega$, $R_{64} = 10 \Omega$, $R_{65} = 10 \Omega$, $R_{66} = 10 \Omega$, $R_{67} = 10 \Omega$, $R_{68} = 10 \Omega$, $R_{69} = 10 \Omega$, $R_{70} = 10 \Omega$, $R_{71} = 10 \Omega$, $R_{72} = 10 \Omega$, $R_{73} = 10 \Omega$, $R_{74} = 10 \Omega$, $R_{75} = 10 \Omega$, $R_{76} = 10 \Omega$, $R_{77} = 10 \Omega$, $R_{78} = 10 \Omega$, $R_{79} = 10 \Omega$, $R_{80} = 10 \Omega$, $R_{81} = 10 \Omega$, $R_{82} = 10 \Omega$, $R_{83} = 10 \Omega$, $R_{84} = 10 \Omega$, $R_{85} = 10 \Omega$, $R_{86} = 10 \Omega$, $R_{87} = 10 \Omega$, $R_{88} = 10 \Omega$, $R_{89} = 10 \Omega$, $R_{90} = 10 \Omega$, $R_{91} = 10 \Omega$, $R_{92} = 10 \Omega$, $R_{93} = 10 \Omega$, $R_{94} = 10 \Omega$, $R_{95} = 10 \Omega$, $R_{96} = 10 \Omega$, $R_{97} = 10 \Omega$, $R_{98} = 10 \Omega$, $R_{99} = 10 \Omega$, $R_{100} = 10 \Omega$.

Solution

$R_2 = R_3 = 100 \Omega$

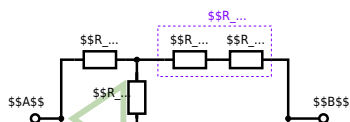

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{eq} = R_Y + (R_Y + R_1) \parallel (R_Y + R_2) \parallel R_6 = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B.

Solution

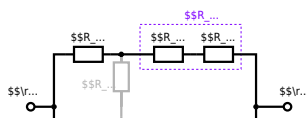

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel R_{\text{eq}} = (500 \sim \Omega) \parallel (200 \sim \Omega) \parallel R_{\text{eq}} = \frac{500 \sim \Omega \cdot 200 \sim \Omega}{500 \sim \Omega + 200 \sim \Omega}$$

end

From: <https://wiki.mexle.org/> - MEXLE Wiki

Permanent link: https://wiki.mexle.org/electrical_engineering_1/ws2022_exam?rev=1680091981

Last update: 2023/03/29 14:13

