

# Exam Winter Semester 2022

## Student Group

First Name	Surname	Matrikel Nr.


## Table of Contents

- Exercise E5 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 3
- Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 6
- Exercise E7 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 7
- Exercise E10 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) ..... 7
- Exercise E8 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) ..... 10
- Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 10
- Exercise E6 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) ..... 11
- Exercise E4 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) ..... 12
- Exercise E2 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 14
- Exercise E3 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 18
- Exercise E1 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 19
- Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) ..... 19
- Exercise E9 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) ..... 22
- Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 22
- Exercise E1 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,


WS2022) ..... 23

Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute  
written test, WS2022) ..... 24



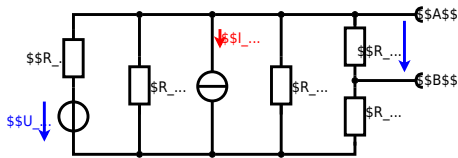

The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :

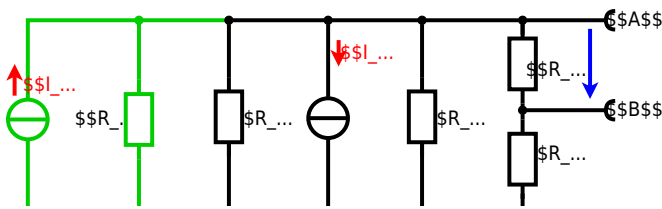

Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ : 
$$R_{135} = R_1 || R_3 || R_5$$
 
$$I_{24} = I_2 - I_4$$
 The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following: 
$$U_{24} = I_{24} \cdot R_{135}$$

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot (R_1 || R_3 || R_5)$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left( \frac{U_2}{R_1} - I_4 \right) \cdot (R_1 || R_3 || R_5)$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0 \Omega$ , so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with  $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$ :

$$U_{AB} = \left( \frac{6.0 \text{ V}}{5.0 \Omega} \right) - 4.2 \text{ A} \cdot \left( \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

**Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)**

2. A refrigerator is explained with the effect of resistance on power. The refrigerator has a resistance of  $10 \Omega$  at  $25^\circ\text{C}$  and a temperature coefficient of  $\alpha = 0.01 \text{ K}^{-1}$  and  $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$ .

Its temperature coefficients are:  $\alpha = 0.01 \text{ K}^{-1}$  and  $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$ .

The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .

Calculate the resistance of the thermistor at  $-40^\circ\text{C}$ .

$$R = 10 \cdot (1 + 0.01 \cdot (-40 - 25) + 71 \cdot 10^{-6} \cdot (-40 - 25)^2)$$

The power of the resistor is  $P = U^2 / R$  and  $Q = P \cdot t$ . Therefore, a solution is to use a heat exchanger to pre-heat the refrigeration system.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

$$R = 10 \Omega \cdot \left( 1 + 0.01 \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

### Exercise E7 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the complex impedance  $Z$  of the circuit shown in the figure through the components.  $R$  and  $X_L$  shall be given.

After analysis, the full bridge circuit can be simplified to a series circuit in phasor domain.  $Z = (2 + j4) \parallel (1 + j5) + 5$

Solution  
.. Calculate the physical values of the two components.  
Solution  $R = 2 \Omega$   $X_L = 4 \Omega$

Solution  
$$\underline{I} = \frac{\underline{U}}{\underline{Z}} \parallel = \frac{50}{(2 + j4) \parallel (1 + j5) + 5}$$
  
The voltage across the capacitor is  $U_C = I \cdot X_C = 50 \cdot \frac{1}{1 + j5}$   
resulting in  $U_C = 9.09 \angle -78.69^\circ$   
Therefore, the component  $X_L$  is  $U_L = I \cdot X_L = 50 \cdot \frac{j4}{1 + j5}$   
impedance  $Z = (2 + j4) \parallel (1 + j5) + 5 = 4.68 - j2.0 \Omega$   
$$\underline{I} = \frac{50}{4.68 - j2.0} = 10.47 \angle 22.8^\circ$$
  
The phase  $\varphi$  can be calculated as  $\varphi = \arctan\left(\frac{-2.0}{4.68}\right) = -22.8^\circ$   
With the complex part  $Z = 4.68 - j2.0 \Omega$   
$$\varphi = \arctan\left(\frac{-2.0}{4.68}\right) = -22.8^\circ$$


### Exercise E10 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the complex impedance  $Z$  of the circuit shown in the figure. The voltage source  $u(t) = 3.0 \sin(2\pi \cdot 15 \cdot t)$  V is connected to a series circuit of an inductor of  $330 \mu\text{H}$  and a capacitor of  $0.22 \mu\text{F}$ .

Solution  
Result  
.. Draw the circuit diagram of the given circuit.

Solution  
Result  
$$Z = (330 \cdot 10^{-6} \cdot j\omega) \parallel \frac{1}{j\omega \cdot 0.22 \cdot 10^{-6}} + 3.0$$
  
With  $\omega = 2\pi \cdot 15 = 94.2 \text{ kHz}$   
$$Z = \frac{1}{j\omega C} \parallel j\omega L + R = \frac{1}{j \cdot 94.2 \cdot 10^3 \cdot 0.22 \cdot 10^{-6}} \parallel j \cdot 94.2 \cdot 10^3 \cdot 330 \cdot 10^{-6} + 3.0$$



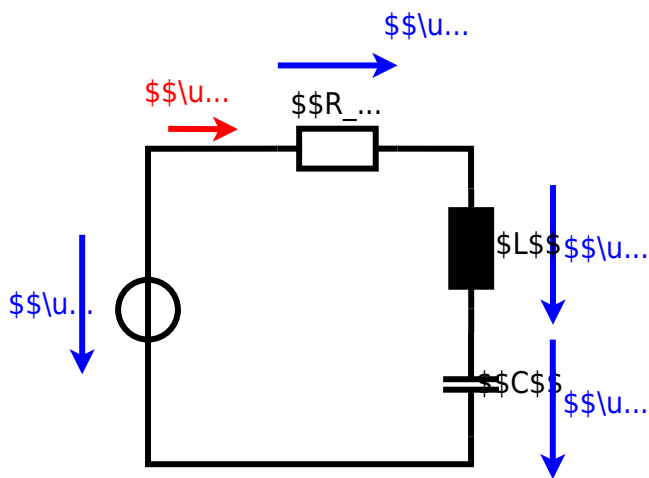

**Exercise E8 Impedances at different Frequencies**  
**(written test, approx. 18 % of a 60-minute written test, WS2022)**

2. A series circuit consists of a resistor with a resistance of  $R_1 = 1.00 \text{ k}\Omega$ , a capacitor with a capacitance of  $C_1 = 40 \text{ nF}$ , and an AC voltage source with a peak voltage of  $U_0 = 10 \text{ V}$  and a frequency of  $f = 4 \text{ MHz}$ . Calculate the absolute value of the impedance of the circuit.

Solution

$$Z = \sqrt{R^2 + X_C^2}$$

$$Z = \sqrt{(1.00 \text{ k}\Omega)^2 + \left(\frac{10 \text{ V}}{2\pi \cdot 4 \text{ MHz} \cdot 40 \text{ nF}}\right)^2}$$

$$Z = \sqrt{(1000 \text{ }\Omega)^2 + \left(\frac{10}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}}\right)^2}$$

$$Z = \sqrt{(1000 \text{ }\Omega)^2 + (0.995 \text{ }\Omega)^2}$$

$$Z \approx 1000.002 \text{ }\Omega \approx 1.00 \text{ k}\Omega$$

**Exercise E1 Resistance of a Wire by Resistivity**  
**(written test, approx. 6 % of a 60-minute written test, WS2022)**

2. A heating element made of nichrome wire with a cross-sectional area of  $A = 1.80 \text{ mm}^2$  is used to heat water. The power dissipation (= heat flow) of  $P = 40 \text{ W}$  is necessary. Calculate the current  $I$  needed to operate the heating element. The nichrome wire has a resistivity of  $\rho = 1.10 \cdot 10^{-6} \text{ }\Omega \cdot \text{m}$ .

The heating element is  $l = 3 \text{ m}$  long and has a diameter of  $d = 3.57 \text{ mm}$ .

Solution

$$P = U \cdot I = R \cdot I^2 \Rightarrow I = \sqrt{\frac{P}{R}}$$

$$R = \rho \cdot \frac{l}{A} = 1.10 \cdot 10^{-6} \text{ }\Omega \cdot \text{m} \cdot \frac{3 \text{ m}}{1.80 \cdot 10^{-6} \text{ m}^2} = 1.83 \text{ }\Omega$$

$$I = \sqrt{\frac{40 \text{ W}}{1.83 \text{ }\Omega}} = 4.67 \text{ A}$$

$$\sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \cdot \Omega}} \quad \text{\textbackslash align*}$$

$$\begin{aligned} R &= \rho \cdot l \cdot \frac{1}{A} \quad \& \quad | \quad \text{\textbackslash text{with } } A = r^2 \cdot \pi = \\ &= \frac{1}{4} \cdot d^2 \cdot \pi \quad \& \quad R = \rho \cdot l \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad \& \quad R = \\ &= 1.10 \cdot 10^{-6} \cdot \Omega \cdot \text{m} \cdot \frac{4 \cdot 3 \cdot \text{m}}{(3.57 \cdot 10^{-3} \cdot \text{m})^2 \cdot \pi} \quad \& \quad \& \quad \& \quad \end{aligned}$$


**Exercise E6 Charging Capacitors**  
**(written test, approx. 16 % of a 60-minute written test, WS2022)**

The circuit (with the light bulb) also consists of a DC circuit. The capacitor is initially uncharged. At the moment  $t_0 = 0 \text{ s}$  when the switch  $S_1$  is closed, the voltage across the capacitor is again  $0 \text{ V}$ . Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.

**Solution:** To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_2$ .

The ideal voltage source  $U$  is in series with  $R_1$  and  $R_2$ . The voltage  $u_c$  is independent of the choice of  $R_1$  and  $R_2$ .


On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $S_2$ .

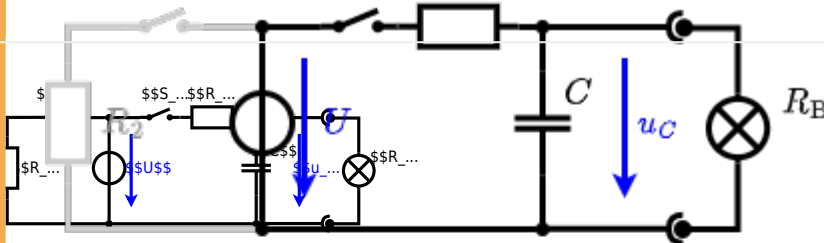

The circuit contains a voltage source  $U = 12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1 = 20 \text{ }\Omega$  and a capacitor of  $C = 100 \text{ }\mu\text{F}$ . The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first tasks. At the moment  $t_0 = 0 \text{ s}$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0) = 0 \text{ V}$ .

.. First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time  $t_1$  when  $u_c(t_1) = 0.5 \cdot U$ .

**Solution**

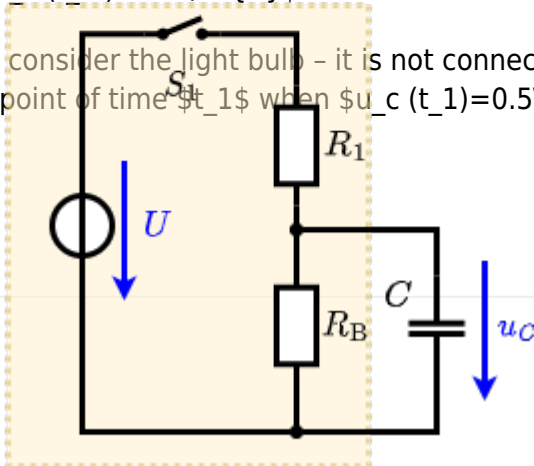

An equivalent linear voltage source can be given with  $U_s$ ,  $R_1$ , and  $R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$  The internal resistance is given by substituting the ideal voltage source with its resistance ( $R = 0 \Omega$ , short-circuit).

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_c(t) = U_s \cdot (1 - e^{-t/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-t/(10 \Omega \cdot 100 \mu F)})$$

The following formula describes the time course of  $u_c(t)$  which has to be  $u_c(t_1) = 0.5 \cdot U$ : 
$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$



**Exercise E4 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)**

The following shall be solved at 0.20 A. Calculate  $R_{eq}$  and  $R_B$  and the voltage  $U_{AB}$  given  $R_B$ .

Solution

$$R_{eq} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.



Since  $R_2=R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as: 
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series: 
$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance  $R_{\text{eq}}$  between  $A$  and  $B$ .

Solution



The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_{-1}) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel R_{\text{eq}}$$

**Exercise E2 Equivalent linear Source  
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.  
Result

$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$




Calculate the internal resistance  $R_i$  and the source voltage  $U_s$  of an equivalent linear voltage source on the connectors  $A$  and  $B$ .  $R_1=5.0 \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3= 10 \Omega$ ,  $I_4=4.2 \text{ A}$ ,  $R_5=10 \Omega$ ,  $R_6=7.5 \Omega$ ,  $R_7=15 \Omega$  Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :

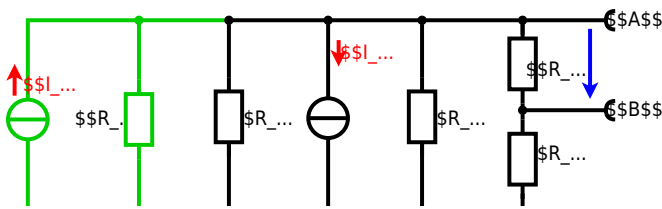

Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_{24}}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following:

$$U_{24} = I_{24} \cdot R_{67}$$

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left( \frac{U_2}{R_1} - I_4 \right) \cdot R_1 || R_3 || R_5$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0 \Omega$ , so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with  $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$ :

$$U_{AB} = \left( \frac{6.0 \text{ V}}{5.0 \Omega} \right) - 4.2 \Omega \cdot \left( \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

**Exercise E3 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)**

2. A refrigerator is explained with the effect of resistance on refrigeration system. The circuit has a resistance of  $10 \Omega$  at  $25^\circ \text{C}$  and  $25 \Omega$  at  $0^\circ \text{C}$ . Your answer.

Its temperature coefficients are:  $\alpha = 0.01 \text{ K}^{-1}$  and  $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$

**Result** The temperature inside the refrigeration system can reach down to  $-40^\circ \text{C}$ .

$$R_{25} = 10 \Omega$$

The power transfer is  $P = U \cdot I = \frac{U^2}{R}$  and  $Q = P \cdot t$ . Therefore, a solution is to increase the heat flow up the refrigeration system.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

$$\text{with } \Delta T = T_{\text{end}} - T_{\text{start}} \implies R = 10 \Omega \cdot \left( 1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ \text{C} - 25^\circ \text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ \text{C} - 25^\circ \text{C})^2 \right)$$

**Exercise E1 Analyzing complex Impedances**  
 (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the complex impedance  $Z$  of the circuit shown in the figure through the components.  $R$  and  $X_L$  shall be given.

After analysis, the full bridge network can be simplified and the voltage  $U$  in parallel with the capacitor  $C$  can be determined.

Solution  
 .. Calculate the physical values of the two components.  
 Solution  $R = 10 \Omega$  and  $X_L = 20 \Omega$

Solution  

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} \quad \text{with } \underline{U} = 50 \text{ V}$$
 The voltage  $U$  is the voltage across the capacitor  $C$  and is the real part of the resulting impedance  $Z$ .  
 Therefore, the component  $X_L$  is the same as the voltage  $U$  across the capacitor  $C$ .  

$$\underline{Z} = R + jX_L + \frac{1}{j\omega C} = 10 + j20 + \frac{1}{j \cdot 300} = 10 + j20 - j0.33 = 10 + j19.67 \Omega$$
 The phase angle  $\varphi$  can be calculated as  

$$\varphi = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right) = \arctan\left(\frac{19.67}{10}\right) = 1.107 \text{ rad} = 62.7^\circ$$
 With the complex part  $\cos(\varphi)$  the physical value  $I$  can be determined  

$$I = \frac{U}{|Z|} = \frac{50}{\sqrt{10^2 + 19.67^2}} = 2.14 \text{ A}$$
 The phase angle  $\varphi$  can be calculated as  

$$\varphi = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right) = \arctan\left(\frac{19.67}{10}\right) = 1.107 \text{ rad} = 62.7^\circ$$

**Exercise E1 Complex Impedance Circuit**  
 (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the complex impedance  $Z$  of the circuit shown in the figure through the components.  $R$  and  $X_L$  shall be given.  
 The voltage  $U$  is the voltage across the capacitor  $C$  and is the real part of the resulting impedance  $Z$ .  
 Therefore, the component  $X_L$  is the same as the voltage  $U$  across the capacitor  $C$ .

Solution  
 .. Draw the circuit diagram of the bridge network.  
 Solution  $R = 10 \Omega$  and  $X_L = 20 \Omega$

Solution  

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} \quad \text{with } \underline{U} = 50 \text{ V}$$
 The voltage  $U$  is the voltage across the capacitor  $C$  and is the real part of the resulting impedance  $Z$ .  
 Therefore, the component  $X_L$  is the same as the voltage  $U$  across the capacitor  $C$ .  

$$\underline{Z} = R + jX_L + \frac{1}{j\omega C} = 10 + j20 + \frac{1}{j \cdot 300} = 10 + j20 - j0.33 = 10 + j19.67 \Omega$$
 The phase angle  $\varphi$  can be calculated as  

$$\varphi = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right) = \arctan\left(\frac{19.67}{10}\right) = 1.107 \text{ rad} = 62.7^\circ$$
 With the complex part  $\cos(\varphi)$  the physical value  $I$  can be determined  

$$I = \frac{U}{|Z|} = \frac{50}{\sqrt{10^2 + 19.67^2}} = 2.14 \text{ A}$$
 The phase angle  $\varphi$  can be calculated as  

$$\varphi = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right) = \arctan\left(\frac{19.67}{10}\right) = 1.107 \text{ rad} = 62.7^\circ$$





**Exercise E9 Impedances at different Frequencies**  
**(written test, approx. 18 % of a 60-minute written test, WS2022)**

**2. A series circuit consists of a resistor with a resistance of  $R_1 = 1.00 \text{ k}\Omega$ , a capacitor with a capacitance of  $C_1 = 40 \text{ nF}$ , and an AC voltage source with a voltage of  $U = 10 \text{ V}$  and a frequency of  $f = 4 \text{ MHz}$ . Calculate the absolute value of the impedance  $Z$  of the circuit.**

**Solution**

$$Z = \sqrt{R_1^2 + X_C^2}$$

$$Z = \sqrt{(1.00 \text{ k}\Omega)^2 + \left(\frac{1}{2\pi \cdot 4 \text{ MHz} \cdot 40 \text{ nF}}\right)^2}$$

$$Z = \sqrt{(1.00 \text{ k}\Omega)^2 + (0.995 \text{ k}\Omega)^2}$$

$$Z = 1.41 \text{ k}\Omega$$

A series circuit means that the current is constant on every component. The equivalent impedance for  $R$  and  $X_C$  combined is given by  $Z = \sqrt{R^2 + X_C^2}$ . Parallel circuit means that the voltage is the same on  $R_1$  and  $C_1$ .  $Z = \sqrt{R_1^2 + X_C^2}$ . Since  $X_C$  is perpendicular to  $R_1$ , this can be simplified to  $Z = \sqrt{R_1^2 + X_C^2}$ .  $X_C$  is perpendicular to  $R_1$  (It has to, since  $R_1$  is perpendicular to  $X_C$  and  $X_C$  is perpendicular to  $R_1$ ). Therefore, the resulting current of the parallel circuit is given as:  $I = \frac{U}{Z}$ . This can be rearranged to  $Z = \frac{U}{I}$ .  $Z = \frac{10 \text{ V}}{7 \text{ mA}}$ .  $Z = 1.43 \text{ k}\Omega$ . Back to the first formula:  $Z = \sqrt{R_1^2 + X_C^2}$ .  $1.43 \text{ k}\Omega = \sqrt{(1.00 \text{ k}\Omega)^2 + X_C^2}$ .  $X_C = \sqrt{(1.43 \text{ k}\Omega)^2 - (1.00 \text{ k}\Omega)^2}$ .  $X_C = 0.995 \text{ k}\Omega$ .

**Exercise E1 Resistance of a Wire by Resistivity**  
**(written test, approx. 6 % of a 60-minute written test, WS2022)**

**2. Heating elements made of nichrome wire with a temperature coefficient of  $\alpha = 0.004 \text{ K}^{-1}$  are used for electric power dissipation (= heat flow) of  $P = 40 \text{ W}$  is necessary. Calculate the current  $I$  needed to operate for heating elements. The Nichrome wire has a resistivity of  $\rho = 1.10 \cdot 10^{-6} \text{ }\Omega \cdot \text{m}$ .**

The heating element is  $l = 3 \text{ m}$  long and has a diameter of  $d = 3.57 \text{ mm}$ . Calculate the resistance  $R$  of the heating element.

**Solution**

$$P = U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}}$$

$$\sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \cdot \Omega}} \quad \text{align*}$$

$$\begin{aligned} R &= \rho \cdot l \cdot \frac{1}{A} \quad \& \quad | \quad \text{with } A = r^2 \cdot \pi = \\ &= \frac{1}{4} d^2 \cdot \pi \quad \& \quad R = \rho \cdot l \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = \\ &= 1.10 \cdot 10^{-6} \cdot \Omega \cdot \text{m} \cdot \frac{4 \cdot 3 \cdot \text{m}}{(3.57 \cdot 10^{-3} \cdot \text{m})^2 \cdot \pi} \quad \& \quad \end{aligned}$$


**Exercise E1 Charging Capacitors**  
**(written test, approx. 16 % of a 60-minute written test, WS2022)**

The circuit (with the light bulb) also consists of a DC voltage source  $U = 12 \text{ V}$ , a resistor  $R_1 = 20 \text{ }\Omega$ , a capacitor  $C = 100 \text{ }\mu\text{F}$ , and a light bulb  $R_B = 5 \text{ }\Omega$ . The switch  $S_1$  is closed, the voltage across the capacitor is again  $0 \text{ V}$  at the moment  $t_0 = 0 \text{ s}$  when the switch  $S_2$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.

**Solution:** To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_B$ .

$$\begin{aligned} \Delta U &= U \cdot \frac{R_1}{R_1 + R_B} = 12 \text{ V} \cdot \frac{20 \text{ }\Omega}{20 \text{ }\Omega + 5 \text{ }\Omega} = 8 \text{ V} \\ R_{\text{int}} &= R_1 \parallel R_B = \frac{20 \text{ }\Omega \cdot 5 \text{ }\Omega}{20 \text{ }\Omega + 5 \text{ }\Omega} = 3.7 \text{ }\Omega \end{aligned}$$


On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_B$ .

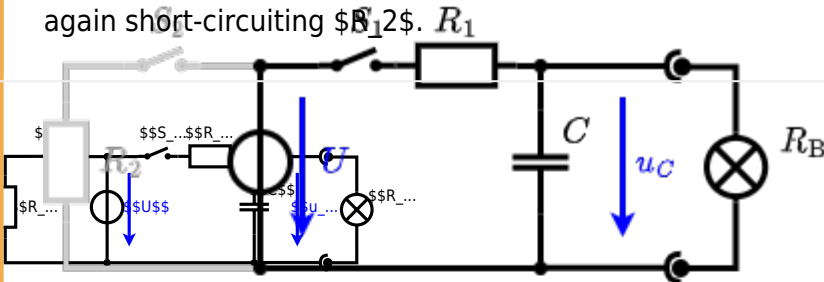

The circuit contains a voltage source  $U = 12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1 = 20 \text{ }\Omega$  and a capacitor of  $C = 100 \text{ }\mu\text{F}$ . The switch  $S_2$  to an additional consumer  $R_B$  will be considered to be open for the first tasks. At the moment  $t_0 = 0 \text{ s}$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0) = 0 \text{ V}$ .

.. First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time  $t_1$  when  $u_c(t_1) = 0.5 \cdot U$ .

**Solution**

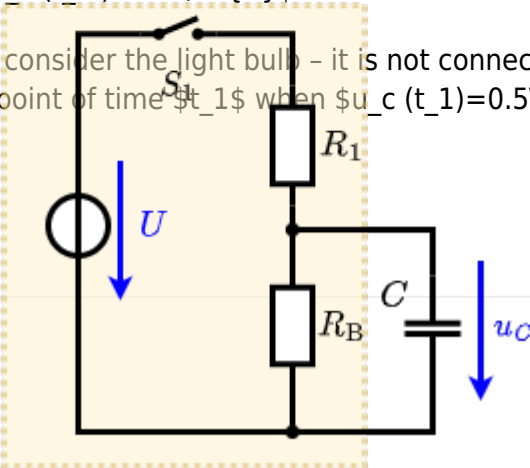

An equivalent linear voltage source can be given with  $U_s$ ,  $R_1$ , and  $R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$  The internal resistance is given by substituting the ideal voltage source with its resistance ( $R = 0 \Omega$ , short-circuit).

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_c(t) = U_s \cdot (1 - e^{-t/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-t/(10 \Omega \cdot 100 \mu F)})$$

The following formula describes the time course of  $u_c(t)$  which has to be  $u_c(t_1) = 0.5 \cdot U$ : 
$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$




**Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)**

The following shall be solved at a rate of  $R_1 = R_2 = R_3 = 10 \Omega$  and the voltage  $U = 10V$  is given.  $R_B$ .

Solution

$$R_{\text{eq}} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.

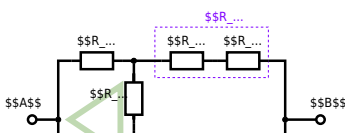


Since  $R_2=R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as: 
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series: 
$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance  $R_{\text{eq}}$  between  $A$  and  $B$ .

Solution

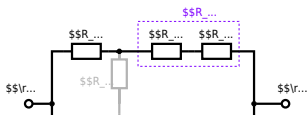

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel R_{\text{eq}} = \{500 \sim \Omega \cdot 200 \sim \Omega\} \over {500 \sim \Omega + 200 \sim \Omega}$$

From: <https://wiki.mexle.org/> - MEXLE Wiki

Permanent link: [https://wiki.mexle.org/electrical\\_engineering\\_1/ws2022\\_exam?rev=1680159834](https://wiki.mexle.org/electrical_engineering_1/ws2022_exam?rev=1680159834)

Last update: 2023/03/30 09:03

