

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 3

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 6

Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) 7

Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) 7

Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) 10

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) 10

Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) 11

Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) 12

Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 14

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 18

Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) 19

Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) 19

Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) 22

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) 22

Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,


WS2022) 23
Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute
written test, WS2022) 24

1

**Exercise E1 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result

$$\begin{aligned} U_{\text{rs}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} \\ &= 6 \Omega \end{aligned}$$

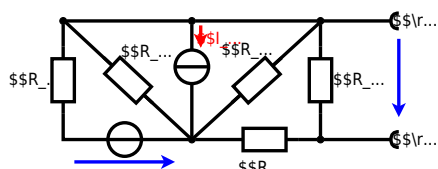


Calculated the internal resistance R_{i} and the source voltage U_{rs} of an equivalent linear voltage source on the connectors A and B .
$$\begin{aligned} R_1 &= 5.0 \Omega, & U_2 &= 6.0 \text{ V}, & R_3 &= 10 \Omega, & I_4 &= 4.2 \text{ A}, & R_5 &= 10 \Omega, \\ & & & & R_6 &= 7.5 \Omega, & R_7 &= 15 \Omega \end{aligned}$$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

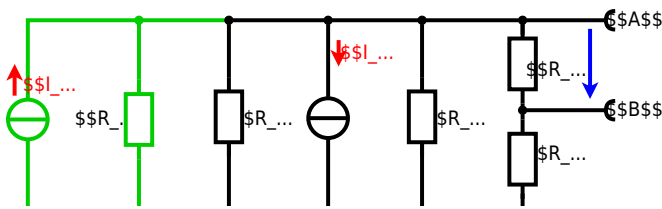

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135} + I_2 \cdot R_2$$

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot (R_1 || R_3 || R_5)$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left(\frac{U_2}{R_1} - I_4 \right) \cdot (R_1 || R_3 || R_5)$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \left(\frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \right) \cdot (15 \Omega \cdot 2.5 \Omega) / (7.5 \Omega + 15 \Omega + 2.5 \Omega)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. A refrigerator is explained with the effect of resistance on refrigeration system. The refrigerator has a resistance of 10Ω at 25°C and 25Ω at -40°C .

Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

Result The temperature inside the refrigeration system can reach down to -40°C .

Calculate the resistance of the thermistor at -40°C .

$$R = 6.5 \text{ k}\Omega$$

The power transfer is $P = U \cdot I$ and $I = U/R$. Therefore, a solution is to use a heat pump.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

$$\Delta T = T_{\text{end}} - T_{\text{start}}$$

$$R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

Exercise E5 Analyzing complex Impedances
 (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the complex impedance Z of the circuit shown in the figure through the components. R and X_L shall be given.

After analysis, the full bridge network can be simplified and the voltage U in phase with the current I can be determined.

Solution
 .. Calculate the physical values of the two components.
 Solution $R = 10 \Omega$ and $X_L = 20 \Omega$

Solution

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} \quad \text{with } \underline{U} = 50 \text{ V}$$
 The voltage U is the voltage across the 4.68Ω resistor and the real resulting impedance is 0.24Ω .
 Therefore, the component 4.68Ω is a resistor with the same value 4.68Ω .

$$\underline{Z} = R + jX_L = 10 \Omega + j20 \Omega$$

$$\underline{I} = \frac{50 \text{ V}}{10 \Omega + j20 \Omega} = \frac{50}{10 + j20} = \frac{50}{10\sqrt{5}} \cdot \frac{1 - j2}{1 - j2} = \frac{5}{\sqrt{5}} (1 - j2) = \sqrt{5} (1 - j2)$$
 The phase angle φ can be calculated as $\varphi = \arctan\left(\frac{-2}{1}\right) = -63.4^\circ$
 With the complex part $\cos(\varphi) = 0.447$ and $\sin(\varphi) = -0.894$

$$\underline{I} = \sqrt{5} (1 - j2) = 2.236 (1 - j2) = 2.236 \angle -63.4^\circ$$
 The phase angle φ can be calculated as $\varphi = \arctan\left(\frac{-2}{1}\right) = -63.4^\circ$

Exercise E7 Complex Impedance Circuit
 (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the complex impedance Z of the circuit shown in the figure. The voltage source $u(t) = 3.0 \text{ V} \cdot \sin(2\pi \cdot 15 \text{ kHz} \cdot t)$ is connected to a series circuit of an inductor of $330 \mu\text{H}$ and a capacitor of $0.22 \mu\text{F}$.

Solution
 Result

$$Z = 19.8 \angle -19.2^\circ \Omega$$

Draw the equivalent circuit diagram of the network with all components, voltages, and currents.

$$Z = \frac{U}{I} \quad \text{with } U = 3.0 \text{ V} \text{ and } I = 0.15 \text{ A}$$

$$Z_C = \frac{1}{j\omega C} = \frac{1}{j \cdot 2\pi \cdot 15 \text{ kHz} \cdot 0.22 \mu\text{F}} = -j1.92 \Omega$$

$$Z_L = j\omega L = j \cdot 2\pi \cdot 15 \text{ kHz} \cdot 330 \mu\text{H} = j31.1 \Omega$$



$$\sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \cdot \Omega}} \quad \text{align*}$$

$$\begin{aligned} R &= \rho \cdot l \cdot \frac{1}{A} \quad \& \quad | \quad \text{with } A = r^2 \cdot \pi = \\ &= \frac{1}{4} d^2 \cdot \pi \quad \& \quad R = \rho \cdot l \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = \\ &= 1.10 \cdot 10^{-6} \cdot \Omega \cdot \text{m} \cdot \frac{4 \cdot 3 \cdot \text{m}}{(3.57 \cdot 10^{-3} \cdot \text{m})^2 \cdot \pi} \quad \& \quad \end{aligned}$$


Exercise E4 Charging Capacitors
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the light bulb) also consists of a DC voltage source $U = 12 \text{ V}$, a resistor $R_1 = 20 \text{ }\Omega$, a capacitor $C = 100 \text{ }\mu\text{F}$, and a light bulb $R_B = 5 \text{ }\Omega$. The switch S_1 is closed, the voltage across the capacitor is again 0 V at the moment $t_0 = 0 \text{ s}$ when the switch S_2 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_B .

The ideal voltage source $U_{\text{eq}} = U \cdot \frac{R_B}{R_1 + R_B} = 12 \text{ V} \cdot \frac{5 \text{ }\Omega}{20 \text{ }\Omega + 5 \text{ }\Omega} = 2 \text{ V}$ and the internal resistance $R_{\text{eq}} = R_1 \parallel R_B = 4 \text{ }\Omega$.

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_1 .

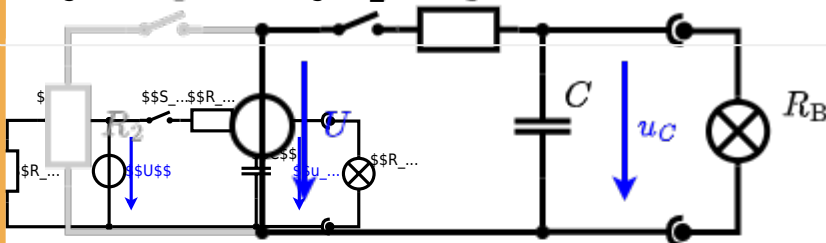


The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ }\Omega$ and a capacitor of $C = 100 \text{ }\mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

.. First do not consider the light bulb - it is not connected to the RC circuit.

Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

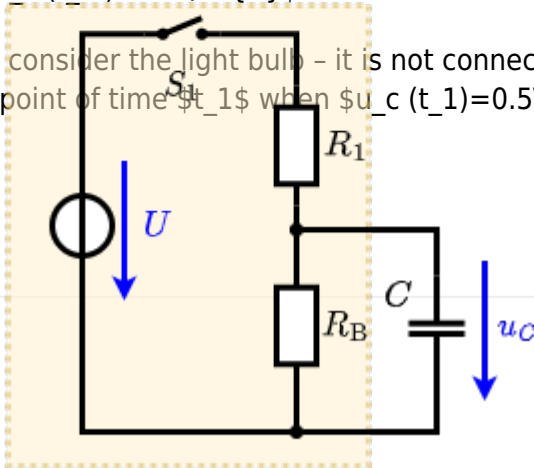

An equivalent linear voltage source can be given with U_s , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$ The internal resistance is given by substituting the ideal voltage source with its resistance ($R = 0 \Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_c(t) = U_s \cdot (1 - e^{-t/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-t/(10 \Omega \cdot 100 \mu F)})$$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1) = 0.5 \cdot U$:
$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$


Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at $U = 200 \text{ V}$ and $R_1 = R_2 = R_3 = 10 \Omega$ and $R_B = 10 \Omega$ and the switch is closed. R_B is given.

Solution

$$R_{\text{eq}} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.

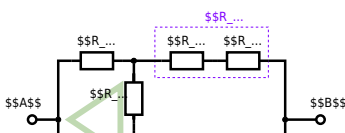

Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:

$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution




The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega}$$

**Exercise E3 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result

$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

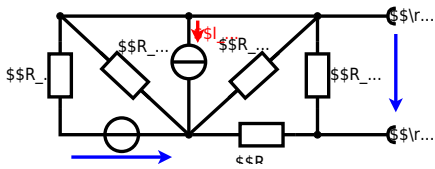


Calculate the internal resistance R_i and the source voltage U_s of an equivalent linear voltage source on the connectors A and B . $R_1=5.0 \Omega$, $U_2=6.0 \text{ V}$, $R_3=10 \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \Omega$, $R_6=7.5 \Omega$, $R_7=15 \Omega$. Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

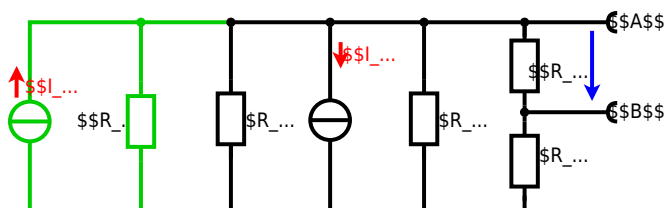

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_{24}}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135} + I_4 \cdot R_1$$

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot (R_1 || R_3 || R_5)$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left(\frac{U_2}{R_1} - I_4 \right) \cdot (R_1 || R_3 || R_5)$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \left(\frac{6.0 \text{ V}}{5.0 \Omega} \right) - 4.2 \Omega \cdot \left(\frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. A refrigerator has a compressor with a resistance of $R_0 = 6.5 \Omega$ at 25°C . The resistance of the system is $R = 10 \Omega$ at 25°C . Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

Result: The temperature inside the refrigeration system can reach down to -40°C .

Calculate the resistance of the thermistor at -40°C .

The power transferred to the resistor is $P = U^2 / R$ and $Q = P \cdot t$. Therefore, a solution is to use a heat exchanger to pre-heat the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

$$\text{with } \Delta T = T_{\text{end}} - T_{\text{start}} \implies R = 10 \Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

Exercise E5 Analyzing complex Impedances
 (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the complex power \underline{S} in a circuit with a voltage source $\underline{u}(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$ V and a load consisting of a resistor $R = 10 \Omega$ and an inductor $L = 10 \text{ mH}$ in series. The current $\underline{i}(t)$ is given by $\underline{i}(t) = I_m \cdot \sin(2\pi \cdot 15 \cdot t + \varphi)$ A. The real power P and the reactive power Q shall be given.

After analysis, the following dimensions must be indicated: \underline{S} in VA, P in W, and Q in var. The phase angle φ shall be given in degrees.

Solution
 .. Calculate the physical values of the load components.
 Solution $R = 10 \Omega$ and $X_L = 2\pi \cdot 15 \cdot 0.01 = 0.942 \Omega$

Solution

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{3.0 \text{ V}}{10 \Omega + j0.942 \Omega} = \frac{3.0}{10.0942} \cdot e^{-j5.7^\circ} = 0.297 \text{ A} \cdot e^{-j5.7^\circ}$$
 The voltage $\underline{u}(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$ is the reference phasor. The resulting current $\underline{i}(t) = 0.297 \cdot \sin(2\pi \cdot 15 \cdot t - 5.7^\circ)$ A. The real power $P = \text{Re}\{\underline{S}\} = \text{Re}\{\underline{U} \cdot \underline{I}^*\} = 3.0 \cdot 0.297 \cdot \cos(5.7^\circ) = 0.85 \text{ W}$. The reactive power $Q = \text{Im}\{\underline{S}\} = \text{Im}\{\underline{U} \cdot \underline{I}^*\} = 3.0 \cdot 0.297 \cdot \sin(5.7^\circ) = 0.30 \text{ var}$. The phase angle $\varphi = -5.7^\circ$.

Exercise E7 Complex Impedance Circuit
 (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the complex power \underline{S} in a circuit with a voltage source $\underline{u}(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$ V and a load consisting of a resistor $R = 10 \Omega$, an inductor $L = 10 \text{ mH}$, and a capacitor $C = 0.22 \mu\text{F}$ in series. The current $\underline{i}(t)$ is given by $\underline{i}(t) = I_m \cdot \sin(2\pi \cdot 15 \cdot t + \varphi)$ A. The real power P and the reactive power Q shall be given.

After analysis, the following dimensions must be indicated: \underline{S} in VA, P in W, and Q in var. The phase angle φ shall be given in degrees.

Solution
 .. Draw the circuit diagram of the given circuit.
 Solution $R = 10 \Omega$, $X_L = 0.942 \Omega$, $X_C = \frac{1}{2\pi \cdot 15 \cdot 0.22 \cdot 10^{-6}} = -157.08 \Omega$

Solution

$$\underline{Z} = R + jX_L - jX_C = 10 \Omega + j0.942 \Omega - j157.08 \Omega = 10 \Omega - j156.14 \Omega$$

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{3.0 \text{ V}}{10 \Omega - j156.14 \Omega} = \frac{3.0}{156.2} \cdot e^{j89.9^\circ} = 0.0192 \text{ A} \cdot e^{j89.9^\circ}$$

$$\underline{S} = \underline{U} \cdot \underline{I}^* = 3.0 \text{ V} \cdot 0.0192 \text{ A} \cdot e^{-j89.9^\circ} = 0.0576 \text{ VA} \cdot e^{-j89.9^\circ}$$

$$P = \text{Re}\{\underline{S}\} = 0.0576 \text{ W} \cdot \cos(89.9^\circ) = 0.000576 \text{ W}$$

$$Q = \text{Im}\{\underline{S}\} = 0.0576 \text{ var} \cdot \sin(89.9^\circ) = 0.0575 \text{ var}$$

$$\varphi = -89.9^\circ$$



Exercise E6 Impedances at different Frequencies
(written test, approx. 18 % of a 60-minute written test, WS2022)

2. A series circuit consists of a resistor with a resistance of $R_1 = 1.00 \text{ k}\Omega$, a capacitor with a capacitance of $C_1 = 40 \text{ nF}$, and an AC voltage source with a voltage of $U = 10 \text{ V}$ and a frequency of $f = 4 \text{ MHz}$. Calculate the absolute value of the impedance of the circuit.

Solution

$$Z = \sqrt{R^2 + X_C^2}$$

$$Z = \sqrt{(1.00 \text{ k}\Omega)^2 + \left(\frac{10 \text{ V}}{2\pi \cdot 4 \text{ MHz} \cdot 40 \text{ nF}}\right)^2}$$

$$Z = \sqrt{(1000 \text{ }\Omega)^2 + \left(\frac{10}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}}\right)^2}$$

$$Z = \sqrt{(1000 \text{ }\Omega)^2 + (0.995 \text{ }\Omega)^2}$$

$$Z = \sqrt{1000000 + 0.990025}$$

$$Z = \sqrt{1000000.990025}$$

$$Z = 1000.495 \text{ }\Omega$$

The resulting current of the parallel circuit is given as:

$$I = \frac{U}{Z} = \frac{10 \text{ V}}{1000.495 \text{ }\Omega} = 9.995 \text{ mA}$$

Exercise E1 Resistance of a Wire by Resistivity
(written test, approx. 6 % of a 60-minute written test, WS2022)

2. A heating element made of nichrome wire with a temperature coefficient of $\alpha = 0.004 \text{ } ^\circ\text{C}^{-1}$ is used for heating. The power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary. Calculate the current I and the resistance R of the heating element. The nichrome wire has a resistivity of $\rho = 1.10 \cdot 10^{-6} \text{ }\Omega \cdot \text{m}$.

The heating element is $l = 3 \text{ m}$ long and has a diameter of $d = 3.57 \text{ mm}$.

Solution

$$P = U \cdot I = R \cdot I^2 \Rightarrow I = \sqrt{\frac{P}{R}}$$

Solution

$$P = U \cdot I = R \cdot I^2 \Rightarrow I = \sqrt{\frac{P}{R}}$$

$$\sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \cdot \Omega}} \quad \text{align*}$$

$$\begin{aligned} R &= \rho \cdot l \cdot \frac{1}{A} \quad \& \quad | \quad \text{with } A = r^2 \cdot \pi = \\ &= \frac{1}{4} \cdot d^2 \cdot \pi \quad \& \quad \rho = \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = \\ &= 1.10 \cdot 10^{-6} \cdot \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \quad \& \quad \end{aligned}$$


Exercise E4 Charging Capacitors
 (written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the light bulb) also consists of a DC voltage source $U = 12 \text{ V}$, a resistor $R_1 = 20 \text{ }\Omega$, a capacitor $C = 100 \text{ }\mu\text{F}$, and a light bulb $R_B = 5 \text{ }\Omega$. The switch S_1 is closed, the voltage across the capacitor is again 0 V at the moment $t_0 = 0 \text{ s}$ when the switch S_2 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution
 Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_B .

Solution
 The ideal voltage source U is in series with R_1 and R_B . The voltage u_c is independent of the choice of R_B .


On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting S_2 .

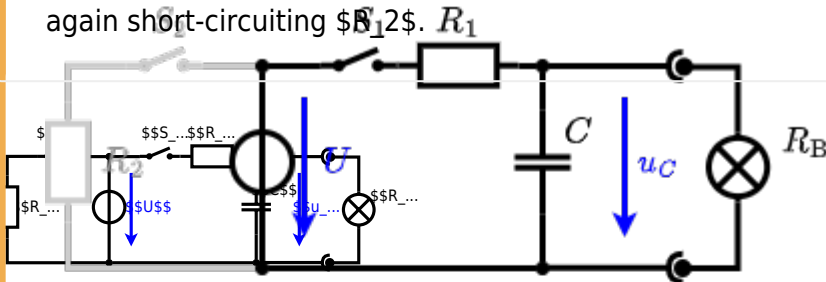

The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ }\Omega$ and a capacitor of $C = 100 \text{ }\mu\text{F}$. The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

... First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

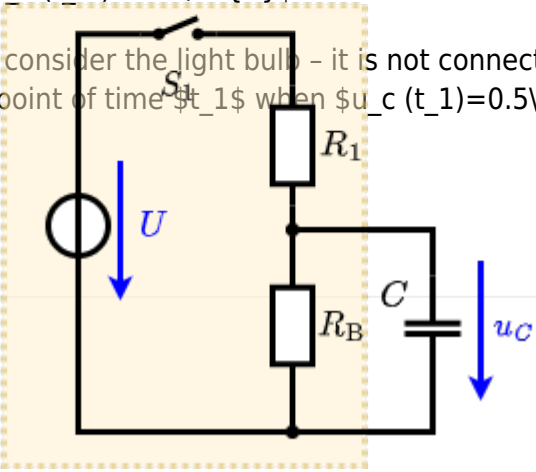

An equivalent linear voltage source can be given with U_s , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$ The internal resistance is given by substituting the ideal voltage source with its resistance ($R = 0 \Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_c(t) = U_s \cdot (1 - e^{-t/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-t/(10 \Omega \cdot 100 \mu F)})$$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1) = 0.5 \cdot U$:
$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$




Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at a rate of $R_1 = R_2 = R_3 = 10 \Omega$ and the voltage $U = 10V$ is given. R_B .

Solution

$$R_{\text{eq}} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.

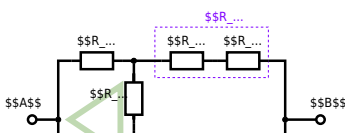

Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

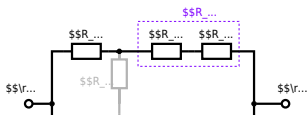

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel R_{\text{eq}} = (500 \sim \Omega) \parallel (200 \sim \Omega) \parallel R_{\text{eq}} = \frac{500 \sim \Omega \cdot 200 \sim \Omega}{500 \sim \Omega + 200 \sim \Omega}$$

From: <https://wiki.mexle.org/> - MEXLE Wiki

Permanent link: https://wiki.mexle.org/electrical_engineering_1/ws2022_exam?rev=1680241422

Last update: **2023/03/31 07:43**

