

Exam Winter Semester 2022

Student Group

| First Name | Surname | Matrikel Nr. |
|------------|---------|--------------|
| | | |
| | | |
| | | |

Table of Contents

- Exercise E5 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 3
- Exercise E2 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 6
- Exercise E7 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) 10
- Exercise E1 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) 11
- Exercise E8 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) 11
- Exercise E9 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) 12
- Exercise E10 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) 13
- Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) 16
- Exercise E4 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) 19
- Exercise E6 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) 20
- Exercise E1 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) 21
- Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 23
- Exercise E3 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 23
- Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) 24
- Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute


| | |
|--|----|
| written test, WS2022) | 25 |
| Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) | 26 |

1

**Exercise E5 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result


$$\begin{aligned} U_{\text{rs}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} \\ &= 6 \text{ } \Omega \end{aligned}$$

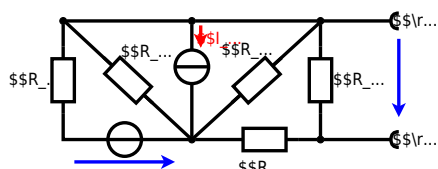

Calculated the internal resistance R_{i} and the source voltage U_{rs} of an equivalent linear voltage source on the connectors A and B .
$$\begin{aligned} R_1 &= 5.0 \text{ } \Omega, & U_2 &= 6.0 \text{ V}, & R_3 &= 10 \text{ } \Omega, & I_4 &= 4.2 \text{ A}, & R_5 &= 10 \text{ } \Omega, & R_6 &= 7.5 \text{ } \Omega, & R_7 &= 15 \text{ } \Omega \end{aligned}$$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

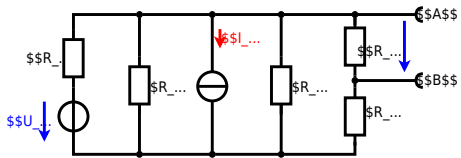

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :



Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135}$$

$$U_{24} = U_2 \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - (U_2 \cdot \frac{R_7}{R_1} - I_4) \cdot \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($= 0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$


with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \Omega \cdot \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} || R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

Exercise E2 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result


$$U_s = U_{AB} = 4.5 \text{ V} || R_i = R_{AB} = 6 \Omega$$

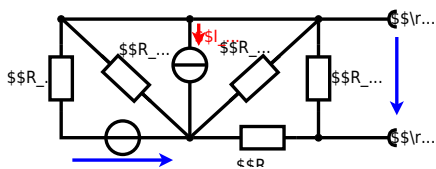


Calculate the internal resistance R_{int} and the source voltage U_s of an equivalent linear voltage source on the connectors A and B . $R_1=5.0 \Omega$, $U_2=6.0 \text{ V}$, $R_3=10 \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \Omega$, $R_6=7.5 \Omega$, $R_7=15 \Omega$. Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

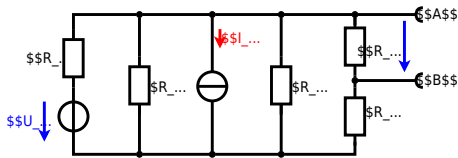

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

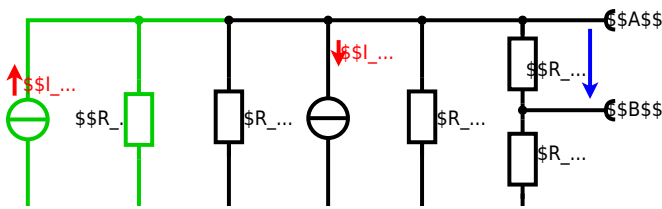

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{45}$$

$$I_{24} = R_{135} \cdot I_{24} \parallel I_{24} = \left(\frac{U_{24}}{R_1} - I_{24} \right) \cdot R_1 \parallel R_3 \parallel R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} = \left(\frac{U_{24}}{R_1} - I_{24} \right) \cdot \frac{R_7 \cdot R_1 \parallel R_3 \parallel R_5}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$

with $R_1 \parallel R_3 \parallel R_5 = 5 \Omega \parallel 10 \Omega \parallel 10 \Omega = 5 \Omega \parallel 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \Omega \cdot \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \parallel R_{AB} = 15 \Omega \parallel (7.5 \Omega + 2.5 \Omega)$$

Exercise E7 Analyzing complex Impedances
(written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage \underline{U}_{AB} and the current \underline{I}_{X1} in the circuit shown in the figure. The components (R and $X_{1,2}$) shall be given.

After analysis, the following phasor voltage and current values are extracted and given in the table below:

| | |
|----------|---|
| Solution | $\underline{U}_{AB} = 10 \text{ V} \angle 0^\circ$ |
| Solution | $\underline{I}_{X1} = 0.24 \text{ A} \angle 90^\circ$ |

.. Calculate the physical values of the voltage and current components.

| | |
|----------|--|
| Solution | $\underline{U}_{AB} = 10 \text{ V} \angle 0^\circ$ |
| Solution | $\underline{I}_{X1} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X2} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X3} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X4} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X5} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X6} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X7} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X8} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X9} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X10} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X11} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X12} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X13} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X14} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X15} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X16} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X17} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X18} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X19} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X20} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X21} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X22} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X23} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X24} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X25} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X26} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X27} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X28} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X29} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X30} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X31} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X32} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X33} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X34} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X35} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X36} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X37} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X38} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X39} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X40} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X41} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X42} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X43} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X44} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X45} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X46} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X47} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X48} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X49} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X50} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X51} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X52} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X53} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X54} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X55} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X56} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X57} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X58} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X59} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X60} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X61} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X62} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X63} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X64} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X65} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X66} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X67} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X68} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X69} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X70} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X71} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X72} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X73} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X74} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X75} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X76} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X77} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X78} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X79} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X80} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X81} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X82} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X83} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X84} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X85} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X86} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X87} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X88} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X89} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X90} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X91} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X92} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X93} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X94} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X95} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X96} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X97} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X98} = 0.24 \text{ A} \angle 0^\circ$ |
| Solution | $\underline{I}_{X99} = 0.24 \text{ A} \angle 90^\circ$ |
| Solution | $\underline{I}_{X100} = 0.24 \text{ A} \angle 0^\circ$ |

The phase φ can be calculated as
$$\varphi = \arctan \left(\frac{\text{Im}(Z)}{\text{Re}(Z)} \right) = \arctan \left(\frac{-4.68 \text{ } \Omega}{0.24 \text{ } \Omega} \right)$$

Exercise E1 Analyzing complex Impedances
(written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phase angle φ of the total impedance Z in the circuit shown in the figure. The results φ and X_L shall be given.

After analysis, the following information about the impedance Z is extracted and given in phase notation: $Z = (2 - j4) \text{ } \Omega + j5 \text{ } \Omega$

.. Calculate the physical values of the two components.
Solution
$$\varphi = \arctan \left(\frac{-4}{2} \right) = \arctan(-2) \approx -63.4^\circ$$

Solution

$$|Z| = \sqrt{2^2 + (-4)^2} = \sqrt{20} = 4.47 \text{ } \Omega$$

$$\varphi = \arctan \left(\frac{-4}{2} \right) = -63.4^\circ$$

The current and voltage across phase angle φ are $4.68 \text{ } \Omega$ and $0.24 \text{ } \Omega$ respectively. The resulting impedance Z is $(2 - j4) \text{ } \Omega + j5 \text{ } \Omega = (2 + j1) \text{ } \Omega$. The magnitude of Z is $|Z| = \sqrt{2^2 + 1^2} = \sqrt{5} = 2.24 \text{ } \Omega$. The phase angle φ is $\varphi = \arctan \left(\frac{1}{2} \right) = 26.6^\circ$. The magnitude of the voltage across Z is $V_Z = I |Z| = 1 \text{ A} \cdot 2.24 \text{ } \Omega = 2.24 \text{ V}$. The magnitude of the current through Z is $I_Z = \frac{V_Z}{|Z|} = \frac{2.24 \text{ V}}{2.24 \text{ } \Omega} = 1 \text{ A}$. The phase angle of the current through Z is $\varphi_Z = \varphi = 26.6^\circ$. The magnitude of the voltage across the resistor is $V_R = I R = 1 \text{ A} \cdot 2 \text{ } \Omega = 2 \text{ V}$. The magnitude of the voltage across the inductor is $V_L = I X_L = 1 \text{ A} \cdot X_L = X_L \text{ V}$. The phase angle of the voltage across the resistor is $\varphi_R = 0^\circ$. The phase angle of the voltage across the inductor is $\varphi_L = 90^\circ$. The phase angle of the total voltage is $\varphi = 26.6^\circ$. The magnitude of the total voltage is $V = I |Z| = 1 \text{ A} \cdot 2.24 \text{ } \Omega = 2.24 \text{ V}$. The magnitude of the total current is $I = \frac{V}{|Z|} = \frac{2.24 \text{ V}}{2.24 \text{ } \Omega} = 1 \text{ A}$. The phase angle of the total current is $\varphi = 26.6^\circ$. The magnitude of the voltage across the resistor is $V_R = I R = 1 \text{ A} \cdot 2 \text{ } \Omega = 2 \text{ V}$. The magnitude of the voltage across the inductor is $V_L = I X_L = 1 \text{ A} \cdot X_L = X_L \text{ V}$. The phase angle of the voltage across the resistor is $\varphi_R = 0^\circ$. The phase angle of the voltage across the inductor is $\varphi_L = 90^\circ$. The phase angle of the total voltage is $\varphi = 26.6^\circ$. The magnitude of the total voltage is $V = I |Z| = 1 \text{ A} \cdot 2.24 \text{ } \Omega = 2.24 \text{ V}$. The magnitude of the total current is $I = \frac{V}{|Z|} = \frac{2.24 \text{ V}}{2.24 \text{ } \Omega} = 1 \text{ A}$. The phase angle of the total current is $\varphi = 26.6^\circ$.

Exercise E8 Impedances at different Frequencies
(written test, approx. 18 % of a 60-minute written test, WS2022)

2. A circuit with a resistor $R_1 = 20 \text{ } \Omega$ and a capacitor $C_1 = 40 \text{ nF}$ is connected to an AC voltage source $v(t) = 50 \cos(300t) \text{ V}$. The resistor R_1 shall have the same absolute value of the impedance as a capacitor $C_1 = 40 \text{ nF}$ at $f_1 = 4 \text{ MHz}$.
Solution

Solution

$$\underline{R}_1 \&= 1.00 \sim \Omega$$

$$\underline{R}_2 \&= 10.0 \sim \Omega$$

$$\underline{X}_{L2} = \omega L = 2\pi \cdot 450 \cdot 10^{-6} = 0.2827 \sim \Omega$$

$$\underline{X}_{C1} = \frac{1}{\omega C} = \frac{1}{2\pi \cdot 450 \cdot 40 \cdot 10^{-9}} = -0.8842 \sim \Omega$$

$$\underline{X}_{C3} = \frac{1}{\omega C} = \frac{1}{2\pi \cdot 4 \cdot 10^{-8}} = -3.9789 \sim \Omega$$

$$\underline{Z}_{R2C1} = \frac{R_2 \cdot (-jX_{C1})}{R_2 - jX_{C1}} = \frac{10 \cdot (-j0.8842)}{10 - j0.8842} = -0.861 - j0.8842 \sim \Omega$$

$$\underline{Z}_{R1Z_{R2C1}} = \frac{1 \cdot (-0.861 - j0.8842)}{1 - 0.861 - j0.8842} = -1.411 - j0.245 \sim \Omega$$

$$\underline{Z}_{R1Z_{R2C1}Z_{C3}} = \frac{(-1.411 - j0.245) \cdot (-j3.9789)}{-1.411 - j0.245 - j3.9789} = 1.121 - j0.377 \sim \Omega$$

$$\underline{I} = \frac{160}{1.121 - j0.377} = 138.5 + j48.5 \sim \text{mA}$$

$$I_{R3} = 138.5 + j48.5 \sim \text{mA}$$

$$I_{C3} = -j48.5 \sim \text{mA}$$

$$I_{R1} = 138.5 + j48.5 \sim \text{mA}$$

$$I_{R2} = 138.5 + j48.5 \sim \text{mA}$$

$$I_{C1} = -j48.5 \sim \text{mA}$$

Exercise E9 Impedances at different Frequencies
 (written test, approx. 18 % of a 60-minute written test, WS2022)


A series circuit means that the current is constant on every component.
 The equivalent impedance for R and L combined is given by $\underline{Z} = R + j\omega L$.
 A parallel circuit means that the voltage is the same on R_2 and C_1 .
 The equivalent impedance for R_2 and C_1 combined is given by $\underline{Z}_{R2C1} = \frac{R_2 \cdot (-jX_{C1})}{R_2 - jX_{C1}}$.
 The resulting current of the parallel circuit is given as: $\underline{I} = \frac{U}{\underline{Z}_{R2C1} + R_1 + \frac{1}{j\omega C_3}}$.
 Back to the first formula: $\underline{I} \cdot \underline{Z}_{R2C1} = \underline{I} \cdot \frac{R_2 \cdot (-jX_{C1})}{R_2 - jX_{C1}}$.
 $\underline{I} \cdot (-0.861 - j0.8842) = (138.5 + j48.5) \cdot \frac{10 \cdot (-j0.8842)}{10 - j0.8842}$.
 $\underline{I} \cdot (-0.861 - j0.8842) = (138.5 + j48.5) \cdot (-0.861 - j0.8842)$.
 $\underline{I} = 138.5 + j48.5 \sim \text{mA}$.


Solution

$$\underline{R}_1 \&= 1.00 \sim \Omega$$

$$\underline{R}_2 \&= 10.0 \sim \Omega$$

A series circuit means that the current is constant on every component.
 The equivalent impedance for R and L combined is given by $\underline{Z} = R + j\omega L$.
 A parallel circuit means that the voltage is the same on R_2 and C_1 .
 The equivalent impedance for R_2 and C_1 combined is given by $\underline{Z}_{R2C1} = \frac{R_2 \cdot (-jX_{C1})}{R_2 - jX_{C1}}$.
 The resulting current of the parallel circuit is given as: $\underline{I} = \frac{U}{\underline{Z}_{R2C1} + R_1 + \frac{1}{j\omega C_3}}$.
 Back to the first formula: $\underline{I} \cdot \underline{Z}_{R2C1} = \underline{I} \cdot \frac{R_2 \cdot (-jX_{C1})}{R_2 - jX_{C1}}$.
 $\underline{I} \cdot (-0.861 - j0.8842) = (138.5 + j48.5) \cdot \frac{10 \cdot (-j0.8842)}{10 - j0.8842}$.
 $\underline{I} \cdot (-0.861 - j0.8842) = (138.5 + j48.5) \cdot (-0.861 - j0.8842)$.
 $\underline{I} = 138.5 + j48.5 \sim \text{mA}$.

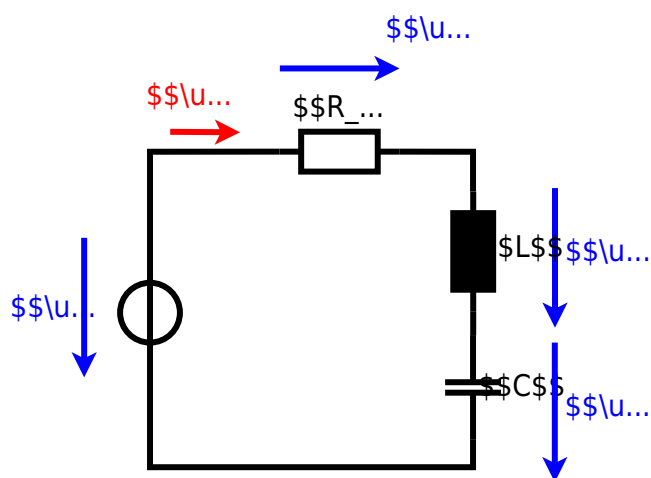

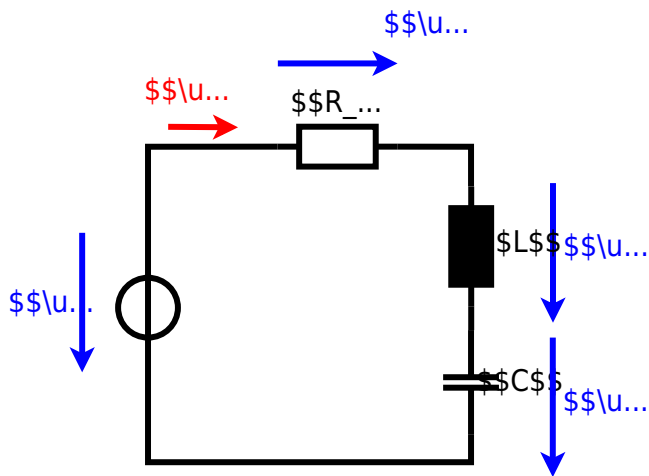


Exercise E4 Pure Resistor Network Simplification
(written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 100% of the given points. The result shall be given.

Solution

$$R_{\text{eq}} = 132.8 \, \Omega$$

Now a wye-delta transformation is necessary.

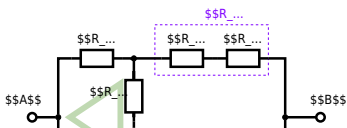

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_1} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1) \parallel (R_Y + R_2)$$

The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B.

Solution

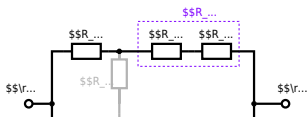

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel R_{\text{eq}} = (500 \sim \Omega) \parallel (200 \sim \Omega) \parallel R_{\text{eq}} = \frac{\{500 \sim \Omega \cdot 200 \sim \Omega\}}{500 \sim \Omega + 200 \sim \Omega}$$


Exercise E6 Charging Capacitors
 (written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit below is a laboratory circuit consisting of a DC voltage source U , a resistor R_1 , a resistor R_2 , a capacitor C , and a switch S_1 . The switch S_1 is initially open. The voltage across the capacitor is again 0 V at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.


Result: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

$$U_{\text{eq}} = \frac{U \cdot R_2}{R_1 + R_2} \quad R_{\text{eq}} = R_1 \parallel R_2 = \frac{R_1 \cdot R_2}{R_1 + R_2}$$

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

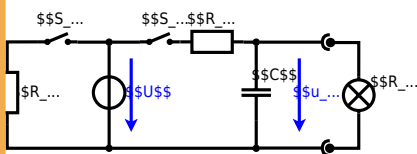


The circuit contains a voltage source $U=12 \text{ V}$, a switch S_1 , a resistor of $R_1=20 \text{ }\Omega$ and a capacitor of $C=100 \text{ }\mu\text{F}$. The switch S_2 to an additional consumer R_2 will be considered to be open for the first task. At the moment $t_0=0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0)=0 \text{ V}$.

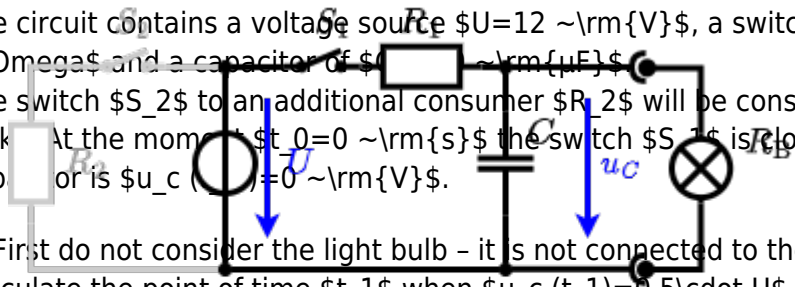

First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time t_1 when $u_c(t_1)=0.5 \cdot U$.

Solution

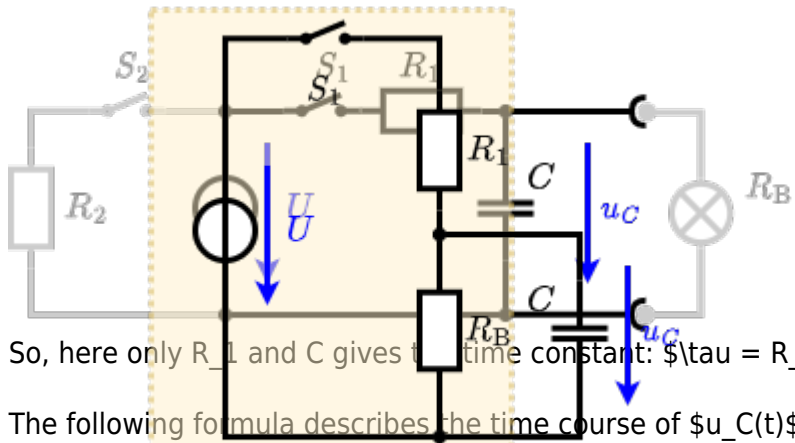

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1)=0.5 \cdot U$:

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$.
 An equivalent linear voltage source can be given with $U_s = U \cdot \frac{R_B}{R_1 + R_B}$ and $R_i = R_1 \parallel R_B$ as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$. The internal resistance is given by substituting the ideal voltage source with its resistance ($R_i = 0 \text{ }\Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \text{ }\Omega$$

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ ms} / (10 \text{ }\Omega \cdot 100 \text{ }\mu\text{F})})$$

Exercise E1 Charging Capacitors
 (written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (as shown in the figure) consists of a DC voltage source $U=6 \text{ V}$, a resistor $R_1=20 \text{ }\Omega$, a capacitor $C=20 \text{ }\mu\text{F}$ and a light bulb $R_B=20 \text{ }\Omega$. The switch S_1 is open. The voltage across the capacitor is again 0 V at the moment $t_0=0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2=1 \text{ ms}$ after closing the switch.

Solution To solve this, first create an equivalent linear voltage source from U , R_1 , and R_B .


$$U_s = U \cdot \frac{R_B}{R_1 + R_B} = 3 \text{ V}$$

$$R_i = R_1 \parallel R_B = 10 \text{ }\Omega$$

Solution

The ideal voltage source is $U = 12 \text{ V}$. The internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .


On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

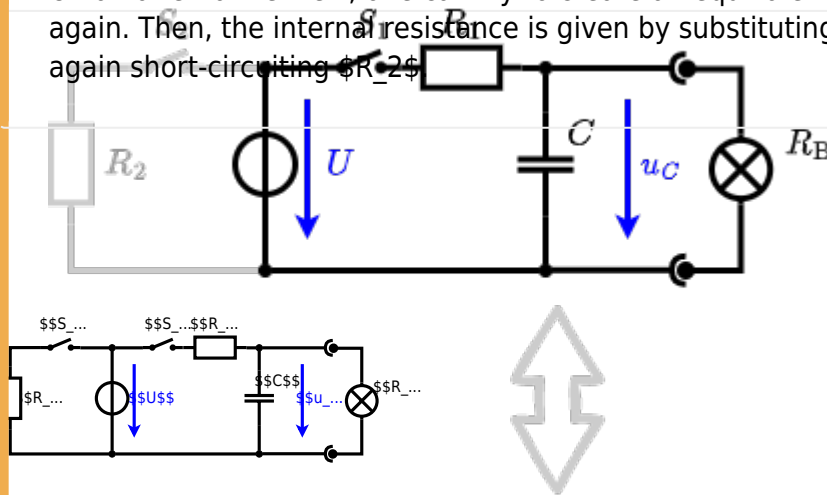

The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ }\Omega$ and a capacitor of $C = 100 \text{ }\mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first asks. At the moment $t_0 = 0$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

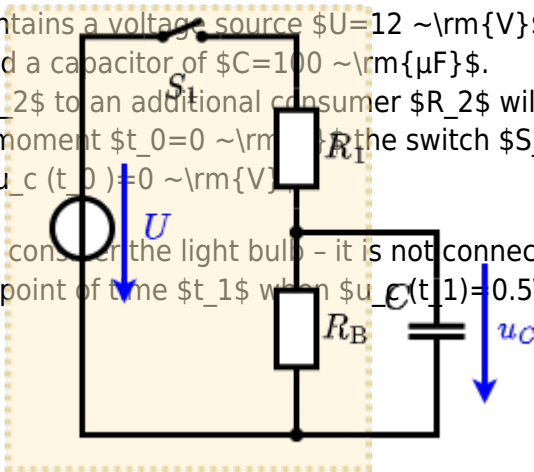

Solution

An equivalent linear voltage source can be given with U , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$. The internal resistance is given by substituting the ideal voltage source with its resistance ($R = 0 \text{ }\Omega$, short-circuit). $R_i = R_1 \parallel R_B = 10 \text{ }\Omega$

$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-t_2/(10 \text{ }\Omega \cdot 100 \text{ }\mu\text{F})})$
So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1) = 0.5 \cdot U$: $u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$
It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$

Exercise E2 Temperature-dependent Resistance
(written test, approx. 6 % of a 60-minute written test, WS2022)

2. A refrigerator, explains a thermoelectric resistance in a refrigeration system. The thermistor has a resistance of $10 \text{ k}\Omega$ at 25°C . Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

Result
 The temperature inside the refrigeration system can reach down to -40°C .

Calculate the resistance of the thermistor at -40°C .

$$R = 6.5 \text{ k}\Omega$$

The power transfer is reduced by a factor of 10. Therefore, a solution is to increase the heat flow up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

```
\begin{align*} R &= R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) && | \\ \text{with } \Delta T &= T_{\text{end}} - T_{\text{start}} && \\ R &= 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2\right) && \\ &= 6.5 \text{ k}\Omega && \end{align*}
```

Exercise E3 Temperature-dependent Resistance
(written test, approx. 6 % of a 60-minute written test, WS2022)

2. A refrigerator, explains a thermoelectric resistance in a refrigeration system. The thermistor has a resistance of $10 \text{ k}\Omega$ at 25°C . Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

Result
 The temperature inside the refrigeration system can reach down to -40°C .

Calculate the resistance of the thermistor at -40°C .

$$R = 6.5 \text{ k}\Omega$$

The power transfer is reduced by a factor of 10. Therefore, a solution is to increase the heat flow up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

```
\begin{align*} R &= R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) && | \\ \text{with } \Delta T &= T_{\text{end}} - T_{\text{start}} && \\ R &= 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2\right) && \\ &= 6.5 \text{ k}\Omega && \end{align*}
```


Exercise E1 Pure Resistor Network Simplification
(written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 100% of the given points. The result shall be given.

Solution

$$R_{\text{eq}} = 132.8 \, \Omega$$

Now a wye-delta transformation is necessary.

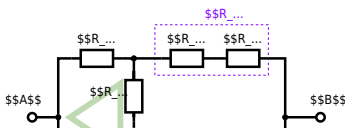

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel (R_Y + R_2)$$

.. The switch shall now be open. Calculate the equivalent resistance R_{eq} between terminals A and B.

Solution

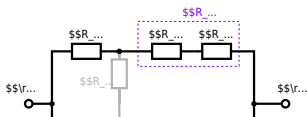

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim\Omega + 200 \sim\Omega + 200 \sim\Omega) \parallel (100 \sim\Omega + 100 \sim\Omega) \parallel R_{\text{eq}} = (500 \sim\Omega) \parallel (200 \sim\Omega) \parallel R_{\text{eq}} = \frac{500 \sim\Omega \cdot 200 \sim\Omega}{500 \sim\Omega + 200 \sim\Omega}$$

Exercise E1 Resistance of a Wire by Resistivity
(written test, approx. 6 % of a 60-minute written test, WS2022)

2. The heating element is used to heat the wire with a temperature of $180 \sim\text{C}$. Electric power dissipation (= heat flow) of $P=40 \sim\text{W}$ is necessary. Determine the current I needed to operate it for heating elements. The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6} \sim\Omega \cdot \text{m}$.

The heating element is $3 \sim\text{m}$ long and has a diameter of $3.57 \sim\text{mm}$.
 Solution: Calculate the resistance R of the heating element.

Solution

$$P = U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \sim\text{W}}{0.33 \sim\Omega}}$$

$$R = \rho \cdot \frac{l}{A} \quad | \quad \text{with } A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \quad \parallel \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \parallel \quad R = 1.10 \cdot 10^{-6} \sim\Omega \cdot \text{m} \cdot \frac{4 \cdot 3 \sim\text{m}}{(3.57 \cdot 10^{-3} \sim\text{m})^2 \cdot \pi}$$

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

2. Heating element made of solid nichrome wire with a temperature coefficient of resistance $\alpha = 0.004 \text{ } ^\circ\text{C}^{-1}$. Electric power dissipation (= heat flow) of $P=40 \text{ W}$ is necessary.

Calculate the current I needed to operate it.

The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .

∴ Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} \\ &= \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \text{with } A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \\ R &= \rho \cdot \frac{l}{\frac{1}{4} d^2 \cdot \pi} \quad \text{with } R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m} \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

From: <https://wiki.mexle.org/> - MEXLE Wiki

Permanent link: https://wiki.mexle.org/electrical_engineering_1/ws2022_exam?rev=1680241645

Last update: 2023/03/31 07:47

