

# Exam Winter Semester 2022

## Student Group

First Name	Surname	Matrikel Nr.

## Table of Contents

- Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 3
- Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 3
- Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 3
- Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 4
- Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) ..... 5
- Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) ..... 6
- Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 8
- Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 12
- Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) ..... 16
- Exercise E4 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) ..... 17
- Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 19
- Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 19
- Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) ..... 20
- Exercise E6 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) ..... 20
- Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) ..... 20

---

test, WS2022) .....	21
Exercise E7 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) .....	24

**Exercise E1 Resistance of a Wire by Resistivity**  
**(written test, approx. 6 % of a 60-minute written test, WS2022)**

A heating element made of solid nichrome wire with a diameter of  $1.80 \text{ mm}$  is used for electric power dissipation (= heat flow) of  $P=40 \text{ W}$  is necessary.

Determine the current  $I$  needed to operate for heating elements.

The Nichrome wire has a resistivity of  $1.10 \cdot 10^{-6} \text{ } \Omega \text{ m}$ .

The heating element is  $3 \text{ m}$  long and has a diameter of  $3.57 \text{ mm}$ .

∴ Calculate the resistance  $R$  of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} \\ &= \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad \text{with } A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \\ R &= \rho \cdot \frac{l}{\frac{1}{4} d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \text{ m} \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

**Exercise E1 Resistance of a Wire by Resistivity**  
**(written test, approx. 6 % of a 60-minute written test, WS2022)**

A heating element made of solid nichrome wire with a diameter of  $1.80 \text{ mm}$  is used for electric power dissipation (= heat flow) of  $P=40 \text{ W}$  is necessary.

Determine the current  $I$  needed to operate for heating elements.

The Nichrome wire has a resistivity of  $1.10 \cdot 10^{-6} \text{ } \Omega \text{ m}$ .

The heating element is  $3 \text{ m}$  long and has a diameter of  $3.57 \text{ mm}$ .

∴ Calculate the resistance  $R$  of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} \\ &= \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad \text{with } A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \\ R &= \rho \cdot \frac{l}{\frac{1}{4} d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \text{ m} \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

**Exercise E2 Temperature-dependent Resistance**

**(written test, approx. 6 % of a 60-minute written test, WS2022)**

2. The diagram exhibits a circuit with a resistor sensitive to temperature. The resistor has a resistance of  $10 \text{ k}\Omega$  at  $25^\circ\text{C}$ . Your answer.

Its temperature coefficients are:  $\alpha = 0.01 \text{ } \frac{1}{\text{K}}$  and  $\beta = 71 \cdot 10^{-6} \text{ } \frac{1}{\text{K}^2}$

**Result**  
The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .

$$R = 6.5 \text{ k}\Omega$$

The power transfer resistor  $P$  is a part of the circuit and generates heat. Therefore, a solution is to use a heat sink to cool the resistor.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad | \quad \Delta T = T_{\text{end}} - T_{\text{start}}$$

$$R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \frac{1}{\text{K}} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \frac{1}{\text{K}^2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2\right)$$

**Exercise E2 Temperature-dependent Resistance**

**(written test, approx. 6 % of a 60-minute written test, WS2022)**

2. The diagram exhibits a circuit with a resistor sensitive to temperature. The resistor has a resistance of  $10 \text{ k}\Omega$  at  $25^\circ\text{C}$ . Your answer.

Its temperature coefficients are:  $\alpha = 0.01 \text{ } \frac{1}{\text{K}}$  and  $\beta = 71 \cdot 10^{-6} \text{ } \frac{1}{\text{K}^2}$

**Result**  
The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .

$$R = 6.5 \text{ k}\Omega$$

The power transfer resistor  $P$  is a part of the circuit and generates heat. Therefore, a solution is to use a heat sink to cool the resistor.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad | \quad \Delta T = T_{\text{end}} - T_{\text{start}}$$

$$R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \frac{1}{\text{K}} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \frac{1}{\text{K}^2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2\right)$$

**Exercise E3 Pure Resistor Network Simplification**  
**(written test, approx. 13 % of a 60-minute written test, WS2022)**

The following shall be solved at 100% of the given points. The result shall be given.

Solution

$$R_{\text{eq}} = 132.8 \, \Omega$$

Now a wye-delta transformation is necessary.

Since  $R_2 = R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as:

$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel (R_Y + R_2) \parallel (R_Y + R_2)$$

.. The switch shall now be open. Calculate the equivalent resistance  $R_{\text{eq}}$  between A and B.

Solution



The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim\Omega + 200 \sim\Omega + 200 \sim\Omega) \parallel (100 \sim\Omega + 100 \sim\Omega) \parallel R_{\text{eq}} = (500 \sim\Omega) \parallel (200 \sim\Omega) \parallel R_{\text{eq}} = \frac{\{500 \sim\Omega \cdot 200 \sim\Omega\}}{500 \sim\Omega + 200 \sim\Omega}$$


**Exercise E1 Pure Resistor Network Simplification**  
 (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved with  $R_1 = 200 \Omega$ ,  $R_2 = R_3 = 100 \Omega$  and the source  $B = 10 \text{ V}$ .  
 Result given:  $R_{\text{eq}} = 132.8 \Omega$ .

Solution

$$R_{\text{eq}} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.

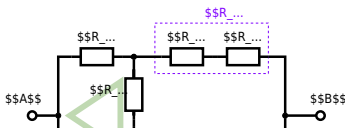


Since  $R_2=R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as: 
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series: 
$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{eq} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance  $R_{eq}$  between A and B.

Solution

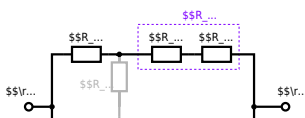

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_{-1}) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$

**Exercise E1 Equivalent linear Source  
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.  
Result


$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$



Calculate the internal resistance  $R_i$  and the source voltage  $U_s$  of an equivalent linear voltage source on the connectors  $A$  and  $B$ .  $R_1=5.0 \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3= 10 \Omega$ ,  $I_4=4.2 \text{ A}$ ,  $R_5=10 \Omega$ ,  $R_6=7.5 \Omega$ ,  $R_7=15 \Omega$  Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

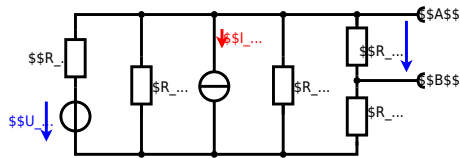

The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :



Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ : 
$$R_{135} = R_1 || R_3 || R_5$$
 
$$I_{24} = I_2 - I_4 = \frac{U_{24}}{R_1} - I_4$$
 The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following: 
$$U_{24}$$

$$U_{24} = U_2 \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} - I_4 \cdot R_1 \parallel R_3 \parallel R_5$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} - \left( \frac{U_2}{R_1} - I_4 \right) \cdot \frac{R_7 \cdot R_1 \parallel R_3 \parallel R_5}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5}$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0\Omega$ , so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$

with  $R_1 \parallel R_3 \parallel R_5 = 5\Omega \parallel 10\Omega \parallel 10\Omega = 5\Omega \parallel 5\Omega = 2.5\Omega$ :

$$U_{AB} = \frac{6.0\text{V}}{5.0\Omega} - 4.2\text{A} \cdot \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega}$$

$$R_{AB} = 15\Omega \parallel (7.5\Omega + 2.5\Omega)$$

### Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.  
Result

$$U_s = U_{AB} = 4.5\text{V} \quad R_i = R_{AB} = 6\Omega$$



Calculated the internal resistance  $R_{\text{int}}$  and the source voltage  $U_{\text{oc}}$  of an equivalent linear voltage source on the connectors  $\text{A}$  and  $\text{B}$ .  $R_1=5.0 \text{ } \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3= 10 \text{ } \Omega$ ,  $I_4=4.2 \text{ A}$ ,  $R_5=10 \text{ } \Omega$ ,  $R_6=7.5 \text{ } \Omega$ ,  $R_7=15 \text{ } \Omega$  Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :



Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ : 
$$R_{135} = R_1 || R_3 || R_5$$
 
$$I_{24} = I_2 - I_4$$
 The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following: 
$$U_{24} = I_{24} \cdot R_{135} + I_{24} \cdot R_6 + I_{24} \cdot R_7$$

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left( \frac{U_2}{R_1} - I_4 \right) \cdot \left( \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5} \right)$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0 \Omega$ , so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with  $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$ :

$$U_{AB} = \left( \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \right) \cdot \left( \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right) || R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

**Exercise E4 Charging Capacitors**  
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit below is a battery with an internal resistance of  $R_1 = 5 \Omega$  and a charging capacitor  $C = 2 \mu\text{F}$  connected in parallel with a switch  $S_1$ . The voltage across the capacitor is again  $0 \text{ V}$  at the moment  $t_0 = 0 \text{ s}$  when the switch  $S_1$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.

**Solution:** To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_2$ .

$$U_{eq} = \frac{U \cdot R_2}{R_1 + R_2} = \frac{12 \text{ V} \cdot 2 \Omega}{5 \Omega + 2 \Omega} = \frac{24}{7} \text{ V} \approx 3.43 \text{ V}$$

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_2$ .




The circuit contains a voltage source  $U=12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1=20 \text{ }\Omega$  and a capacitor of  $C=100 \text{ }\mu\text{F}$ . The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first task. At the moment  $t_0=0 \text{ s}$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0)=0 \text{ V}$ .



First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time  $t_1$  when  $u_c(t_1)=0.5 \cdot U$ .

Solution

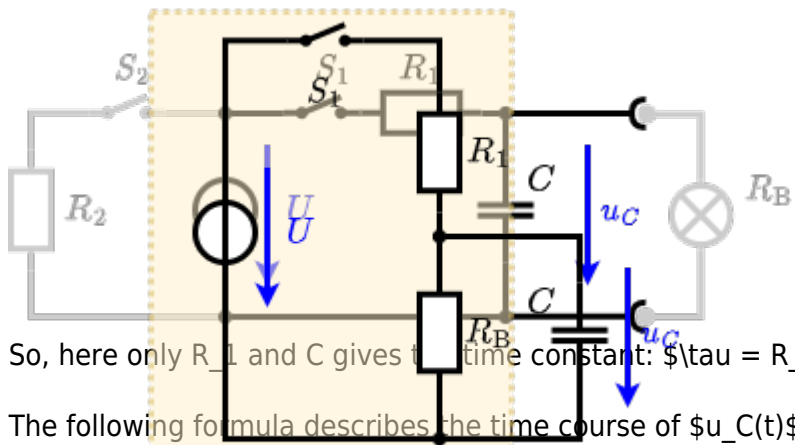

So, here only  $R_1$  and  $C$  gives the time constant:  $\tau = R_1 \cdot C$

The following formula describes the time course of  $u_c(t)$  which has to be  $u_c(t_1)=0.5 \cdot U$ :  

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5$   
 An equivalent linear voltage source can be given with  $U_s$ ,  $R_1$  and  $R_B$  as seen in yellow:  

$$U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$$
 The internal resistance is given by substituting the ideal voltage source with its resistance ( $=0 \text{ }\Omega$ , short-circuit).  

$$R_i = R_1 \parallel R_B = 10 \text{ }\Omega$$

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$  The internal resistance is given by substituting the ideal voltage source with its resistance ( $=0 \text{ }\Omega$ , short-circuit).  

$$R_i = R_1 \parallel R_B = 10 \text{ }\Omega$$
  

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ ms} / (10 \text{ }\Omega \cdot 100 \text{ }\mu\text{F})})$$

**Exercise E4 Charging Capacitors**  
**(written test, approx. 16 % of a 60-minute written test, WS2022)**

The circuit (as shown in the figure) consists of a DC voltage source  $U=6 \text{ V}$ , a resistor  $R_1=20 \text{ }\Omega$ , a capacitor  $C=20 \text{ }\mu\text{F}$  and a light bulb  $R_B=10 \text{ }\Omega$ . The switch  $S_1$  is open. The voltage across the capacitor is again  $0 \text{ V}$  at the moment  $t_0=0 \text{ s}$  when the switch  $S_1$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2=1 \text{ ms}$  after closing the switch.

**Solution** To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_B$ .  

$$U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{2}{3} \cdot U = 4 \text{ V}$$

$$R_i = R_1 \parallel R_B = \frac{20 \text{ }\Omega \cdot 10 \text{ }\Omega}{20 \text{ }\Omega + 10 \text{ }\Omega} = 6.67 \text{ }\Omega$$

Solution

The ideal voltage source is  $U = 12 \text{ V}$ . The internal resistance is  $R_1 = 20 \text{ }\Omega$ . The voltage across the capacitor is  $u_C$ . The voltage across the light bulb is  $u_B$ . The voltage across the resistor  $R_2$  is  $u_{R_2}$ . The voltage across the capacitor is  $u_C$ . The voltage across the light bulb is  $u_B$ . The voltage across the resistor  $R_2$  is  $u_{R_2}$ .


On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_2$ .



The circuit contains a voltage source  $U = 12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1 = 20 \text{ }\Omega$  and a capacitor of  $C = 100 \text{ }\mu\text{F}$ .

The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first asks. At the moment  $t_0 = 0$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_C(t_0) = 0$ .

First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time  $t_1$  when  $u_C(t_1) = 0.5 \cdot U$ .

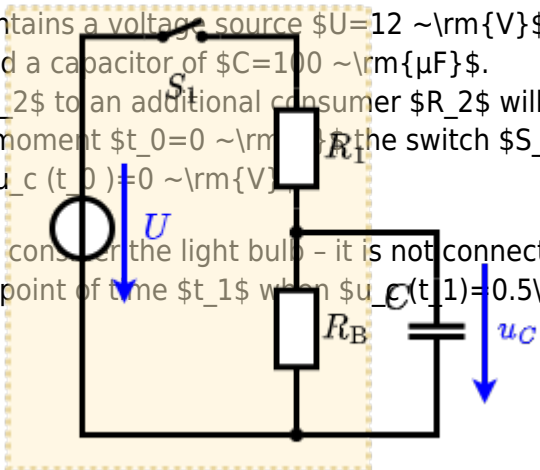

Solution

An equivalent linear voltage source can be given with  $U$ ,  $R_1$ , and  $R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$ . The internal resistance is given by substituting the ideal voltage source with its resistance ( $R = 0 \text{ }\Omega$ , short-circuit).  $R_i = R_1 \parallel R_B = 10 \text{ }\Omega$ .

$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-t_2/(10 \text{ }\Omega \cdot 100 \text{ }\mu\text{F})})$   
So, here only  $R_1$  and  $C$  gives the time constant:  $\tau = R_1 \cdot C$

The following formula describes the time course of  $u_C(t)$  which has to be  $u_C(t_1) = 0.5 \cdot U$ :  $u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$   
It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$

### Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Given that the phasor voltage source  $\underline{U} = 50 \angle 0^\circ$  V, the admittance  $\underline{Y} = 0.24$  S, and the impedance  $\underline{Z} = 4.68 - j2 \Omega$ , the current  $\underline{I}$  through the components ( $\$R\$ and  $\$X_L\$$ ) shall be given.$

After analysis, the full width dimensioned current  $\underline{I}$  can be extracted and given in magnitude and phase. The phase  $\varphi$  shall be given in degrees.

Solution  
.. Calculation of physical values of the two components.  
Solution 
$$R = \frac{1}{\text{Re}\{\underline{Y}\}} = \frac{1}{0.24} = 4.167 \Omega$$

Solution

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ}{4.68 - j2} = 10.1 \angle 23.4^\circ \text{ A}$$

The current  $\underline{I}$  through the voltage source is  $10.1 \angle 23.4^\circ$  A. The phase angle is  $23.4^\circ$  (lagging).  
The admittance  $\underline{Y} = 0.24$  S is the sum of the admittance of the resistor  $\underline{Y}_R = 0.24$  S and the admittance of the inductor  $\underline{Y}_L = -j0.0833$  S.

Therefore, the admittance of the inductor is  $\underline{Y}_L = -j0.0833$  S. The impedance of the inductor is  $\underline{Z}_L = \frac{1}{\underline{Y}_L} = -j12 \Omega$ .  
The phase angle  $\varphi$  is calculated as  $\varphi = \arctan\left(\frac{\text{Im}\{\underline{Z}\}}{\text{Re}\{\underline{Z}\}}\right) = \arctan\left(\frac{-2}{4.68}\right) = -23.4^\circ$ .

With the complex part of the admittance  $\underline{Y} = 0.24 - j0.0833$  S, the phase angle  $\varphi$  is  $23.4^\circ$ .  
$$\varphi = \arctan\left(\frac{\text{Im}\{\underline{Y}\}}{\text{Re}\{\underline{Y}\}}\right) = \arctan\left(\frac{-0.0833}{0.24}\right) = -23.4^\circ$$

The phase angle  $\varphi$  can be calculated as  $\varphi = \arctan\left(\frac{\text{Im}\{\underline{Z}\}}{\text{Re}\{\underline{Z}\}}\right) = \arctan\left(\frac{-2}{4.68}\right) = -23.4^\circ$ .

### Exercise E5 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Given that the phasor voltage source  $\underline{U} = 50 \angle 0^\circ$  V, the admittance  $\underline{Y} = 0.24$  S, and the impedance  $\underline{Z} = 4.68 - j2 \Omega$ , the current  $\underline{I}$  through the components ( $\$R\$ and  $\$X_L\$$ ) shall be given.$

After analysis, the full width dimensioned current  $\underline{I}$  can be extracted and given in magnitude and phase. The phase  $\varphi$  shall be given in degrees.

Solution  
.. Calculation of physical values of the two components.  
Solution 
$$R = \frac{1}{\text{Re}\{\underline{Y}\}} = \frac{1}{0.24} = 4.167 \Omega$$

Solution

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ}{4.68 - j2} = 10.1 \angle 23.4^\circ \text{ A}$$

The current  $\underline{I}$  through the voltage source is  $10.1 \angle 23.4^\circ$  A. The phase angle is  $23.4^\circ$  (lagging).  
The admittance  $\underline{Y} = 0.24$  S is the sum of the admittance of the resistor  $\underline{Y}_R = 0.24$  S and the admittance of the inductor  $\underline{Y}_L = -j0.0833$  S.

The absolute value of the impedance is  $\sqrt{(0.24 \sim \Omega)^2 + (4.68 \sim \Omega)^2} = 4.7 \sim \Omega$   
 The phase  $\varphi = \arctan\left(\frac{4.68 \sim \Omega}{0.24 \sim \Omega}\right) = 86.8^\circ$   
 With the complex part comes the physical value:  $X_L = \omega L = 2\pi \cdot 4 \cdot 10^6 \cdot 1.00 \cdot 10^{-6} = 25.1 \sim \Omega$   
 The phase  $\varphi = \arctan\left(\frac{25.1 \sim \Omega}{10.0 \sim \Omega}\right) = 68.3^\circ$   
 The phase difference  $\Delta\varphi = 86.8^\circ - 68.3^\circ = 18.5^\circ$

**Exercise E6 Impedances at different Frequencies**  
 (written test, approx. 18 % of a 60-minute written test, WS2022)

At a series circuit with  $R_1 = 1.00 \sim \Omega$ ,  $R_2 = 10.0 \sim \Omega$ ,  $R_3 = 10.0 \sim \Omega$ ,  $C_1 = 40 \sim \text{nF}$ ,  $C_2 = 100 \sim \text{nF}$ ,  $L_1 = 4.7 \sim \mu\text{H}$ ,  $L_2 = 10 \sim \mu\text{H}$ ,  $I = 60 \sim \text{mA}$  through a resistor  $R_1$  shall have the same absolute value of the impedance as a capacitor  $C_1 = 40 \sim \text{nF}$  at  $f = 4 \sim \text{MHz}$ .

**Solution**

$R_1 = 1.00 \sim \Omega$   
 $R_2 = 10.0 \sim \Omega$

A series circuit means that the current is constant on every component.  
 The equivalent impedance for  $R_2$  and  $L_1$  combined is given by  $Z_{L1R2} = \sqrt{R_2^2 + X_{L1}^2}$   
 Parallel circuit means that the voltage is the same on  $R_3$  and  $C_2$ .  
 $Z_{C2R3} = \sqrt{R_3^2 + X_{C2}^2}$   
 Since  $Z_{L1R2}$  and  $Z_{C2R3}$  are perpendicular to each other, the resulting current of the parallel circuit is given as:  
 $I_{parallel} = \sqrt{I_{R3}^2 + I_{C2}^2}$   
 This current is the same as the current through  $R_1$ .  
 $I = I_{parallel} = \sqrt{I_{R3}^2 + I_{C2}^2} = \sqrt{\left(\frac{U}{Z_{C2R3}}\right)^2 + \left(\frac{U}{Z_{L1R2}}\right)^2}$   
 Back to the first formula:  $R_1 \cdot I = \sqrt{R_3^2 + X_{C2}^2} \cdot \frac{U}{\sqrt{R_2^2 + X_{L1}^2}}$

**Exercise E6 Impedances at different Frequencies**  
 (written test, approx. 18 % of a 60-minute written test, WS2022)



□□□□□□□□□□ 10510...



**Exercise E7 Complex Impedance Circuit**  
**(written test, approx. 15 % of a 60-minute written test, WS2022)**

1. Calculate the circuit impedance  $Z$  and the effective value  $|Z|$  and  $|I|$  in the circuit. The voltage source  $u(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$  V is connected with an inductor of  $330 \mu\text{H}$  and a capacitor of  $0.22 \mu\text{F}$ , all in series.

Result

$$Z = 197.3 \text{ } \Omega \quad |Z| = 48.2 \text{ } \Omega$$

Draw the circuit diagram of the given circuit.

$$Z = \frac{U}{I} \quad I = \frac{U}{Z} \quad Z_C = \frac{1}{2\pi \cdot f \cdot C} = \frac{1}{2\pi \cdot 15 \cdot 0.22 \cdot 10^{-6}}$$

Result

$$Z = \sqrt{R^2 + (X_L - X_C)^2} = \sqrt{330^2 + (2\pi \cdot 15 \cdot 330 \cdot 10^{-6} - \frac{1}{2\pi \cdot 15 \cdot 0.22 \cdot 10^{-6}})^2}$$

$$Z = \sqrt{330^2 + (0.0033 - 19.24)^2} = \sqrt{330^2 + (-18.91)^2} = \sqrt{108900 + 357.58} = \sqrt{109257.58} = 330.5 \text{ } \Omega$$

$$|I| = \frac{|U|}{|Z|} = \frac{3.0}{330.5} = 0.00907 \text{ A} = 9.07 \text{ mA}$$

$$Z = R + j(X_L - X_C) = 330 + j(0.0033 - 19.24) = 330 - j18.91 \text{ } \Omega$$

$$\underline{Z} = R + j(X_L - X_C) = 330 + j(0.0033 - 19.24) = 330 - j18.91 \text{ } \Omega$$

$$|Z| = \sqrt{R^2 + (X_L - X_C)^2} = \sqrt{330^2 + (-18.91)^2} = 330.5 \text{ } \Omega$$

$$|I| = \frac{|U|}{|Z|} = \frac{3.0}{330.5} = 0.00907 \text{ A} = 9.07 \text{ mA}$$

5510





From:  
<https://wiki.mexle.org/> - **MEXLE Wiki**

Permanent link:  
[https://wiki.mexle.org/electrical\\_engineering\\_1/ws2022\\_exam?rev=1680384531](https://wiki.mexle.org/electrical_engineering_1/ws2022_exam?rev=1680384531)

Last update: **2023/04/01 23:28**

