

# Exam Winter Semester 2022

## Student Group

First Name	Surname	Matrikel Nr.

## Table of Contents

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) .....	3
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) .....	3
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) .....	4
Exercise E3 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) .....	4
Exercise E4 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) .....	5
Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) .....	6
Exercise E5 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) .....	8
Exercise E2 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) .....	12
Exercise E6 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) .....	16
Exercise E1 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) .....	17
Exercise E7 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) .....	19
Exercise E1 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) .....	19
Exercise E8 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) .....	20
Exercise E9 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) .....	20
Exercise E10 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written	

---

test, WS2022) .....	21
Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) .....	24

G

**Exercise E1 Resistance of a Wire by Resistivity**  
**(written test, approx. 6 % of a 60-minute written test, WS2022)**

**A. Heating element made of nichrome wire with a temperature coefficient of 1.80 used in a 230 V electric circuit. A power dissipation (= heat flow) of  $P=40 \text{ W}$  is necessary. Determine the current  $I$  needed to operate it for heating elements.**

The Nichrome wire has a resistivity of  $1.10 \cdot 10^{-6} \text{ } \Omega \text{ m}$ .

The heating element is  $3 \text{ m}$  long and has a diameter of  $3.57 \text{ mm}$ .

**Solution:** Calculate the resistance  $R$  of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} \\ R &= \rho \cdot \frac{l}{A} \quad | \quad \text{with } A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \\ R &= \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \text{and } R = 1.10 \cdot 10^{-6} \text{ } \Omega \text{ m} \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

**Exercise E1 Resistance of a Wire by Resistivity**  
**(written test, approx. 6 % of a 60-minute written test, WS2022)**

**A. Heating element made of nichrome wire with a temperature coefficient of 1.80 used in a 230 V electric circuit. A power dissipation (= heat flow) of  $P=40 \text{ W}$  is necessary. Determine the current  $I$  needed to operate it for heating elements.**

The Nichrome wire has a resistivity of  $1.10 \cdot 10^{-6} \text{ } \Omega \text{ m}$ .

The heating element is  $3 \text{ m}$  long and has a diameter of  $3.57 \text{ mm}$ .

**Solution:** Calculate the resistance  $R$  of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} \\ R &= \rho \cdot \frac{l}{A} \quad | \quad \text{with } A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \\ R &= \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \text{and } R = 1.10 \cdot 10^{-6} \text{ } \Omega \text{ m} \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

### Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. A refrigerator, explained with the effect of constant temperature, is used to cool down the food. The food has a resistance of  $10 \text{ k}\Omega$  at  $25^\circ\text{C}$ . Its temperature coefficients are:  $\alpha=0.01 \text{ K}^{-1}$  and  $\beta=71 \cdot 10^{-6} \text{ K}^{-2}$ .

Result: The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .

Calculate the resistance of the thermistor at  $-40^\circ\text{C}$ .

$$R = 6.5 \text{ k}\Omega$$

The power transfer is reduced by a factor of 10. Therefore, a solution is to use a heat sink to cool the refrigerator system.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

```
\begin{align*} R &= R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) && | \\ \text{\textit{with } } \Delta T &= T_{\text{end}} - T_{\text{start}} && \\ R &= 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2\right) && \\ &= 6.5 \text{ k}\Omega && \end{align*}
```

### Exercise E3 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. A refrigerator, explained with the effect of constant temperature, is used to cool down the food. The food has a resistance of  $10 \text{ k}\Omega$  at  $25^\circ\text{C}$ . Its temperature coefficients are:  $\alpha=0.01 \text{ K}^{-1}$  and  $\beta=71 \cdot 10^{-6} \text{ K}^{-2}$ .

Result: The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .

Calculate the resistance of the thermistor at  $-40^\circ\text{C}$ .

$$R = 6.5 \text{ k}\Omega$$

The power transfer is reduced by a factor of 10. Therefore, a solution is to use a heat sink to cool the refrigerator system.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

```
\begin{align*} R &= R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) && | \\ \text{\textit{with } } \Delta T &= T_{\text{end}} - T_{\text{start}} && \\ R &= 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2\right) && \\ &= 6.5 \text{ k}\Omega && \end{align*}
```

**Exercise E4 Pure Resistor Network Simplification**  
**(written test, approx. 13 % of a 60-minute written test, WS2022)**

The following shall be solved at once, the result is given.  $R_{AB}$  and the value between  $A$  and  $B$ .

Solution

$$R_{eq} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.



Since  $R_2 = R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as:

$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{eq} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

The switch shall now be open. Calculate the equivalent resistance  $R_{AB}$  between  $A$  and  $B$ .

Solution



The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel (500 \Omega) \parallel (200 \Omega) \parallel (500 \Omega \cdot 200 \Omega) / (500 \Omega + 200 \Omega)$$


**Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)**

The following shall be solved with  $R_1 = 200 \Omega$ ,  $R_2 = R_3 = 100 \Omega$  and the source  $B = 10 \text{ V}$ .  
 Result given:  $R_{\text{eq}} = 132.8 \Omega$ .

Solution

$$R_{\text{eq}} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.

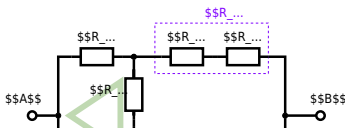

Since  $R_2=R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as: 
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series: 
$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{eq} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance  $R_{eq}$  between A and B.

Solution



The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_{-1}) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$

**Exercise E5 Equivalent linear Source  
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.  
Result

$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$




Calculated the internal resistance  $R_{\text{int}}$  and the source voltage  $U_{\text{oc}}$  of an equivalent linear voltage source on the connectors  $\text{A}$  and  $\text{B}$ .  $R_1=5.0 \text{ } \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3= 10 \text{ } \Omega$ ,  $I_4=4.2 \text{ A}$ ,  $R_5=10 \text{ } \Omega$ ,  $R_6=7.5 \text{ } \Omega$ ,  $R_7=15 \text{ } \Omega$  Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :

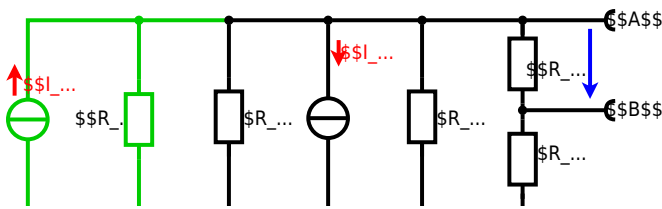

Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ : 
$$R_{135} = R_1 || R_3 || R_5$$
 
$$I_{24} = I_2 - I_4$$
 The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following: 
$$U_{24}$$

$$U_{24} = U_2 \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - I_4 \cdot \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5}$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0\Omega$ , so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with  $R_1 || R_3 || R_5 = 5\Omega || 10\Omega || 10\Omega = 5\Omega || 5\Omega = 2.5\Omega$ :

$$U_{AB} = \frac{6.0\text{V}}{5.0\Omega} - 4.2\Omega \cdot \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega}$$

$$R_{AB} = 15\Omega || (7.5\Omega + 2.5\Omega)$$

### Exercise E2 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.  
Result

$$U_s = U_{AB} = 4.5\text{V} \quad R_i = R_{AB} = 6\Omega$$




Calculate the internal resistance  $R_{in}$  and the source voltage  $U_{s}$  of an equivalent linear voltage source on the connectors A and B.  $R_1=5.0 \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3=10 \Omega$ ,  $I_4=4.2 \text{ A}$ ,  $R_5=10 \Omega$ ,  $R_6=7.5 \Omega$ ,  $R_7=15 \Omega$ . Use equivalent sources in order to simplify the circuit!

### Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :

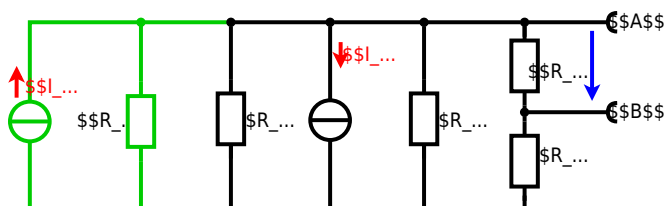

Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ : 
$$R_{135} = R_1 || R_3 || R_5$$
 
$$I_{24} = I_2 - I_4$$
 The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following: 
$$U_{24} = I_{24} \cdot R_{135} + I_{24} \cdot R_6 + I_{24} \cdot R_7$$

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - (U_2 \cdot \frac{R_1}{R_1 + R_3 + R_5} - I_4) \cdot R_1 || R_3 || R_5$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0 \Omega$ , so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with  $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$ :

$$U_{AB} = \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \cdot 15 \Omega \cdot \frac{2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega}$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

**Exercise E6 Charging Capacitors**  
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit below is a RC circuit consisting of a DC voltage source  $U$ , a resistor  $R_1$ , a resistor  $R_2$ , and a capacitor  $C$ . The switch  $S_1$  is initially open. The voltage across the capacitor is again  $0 \text{ V}$  at the moment  $t_0 = 0 \text{ s}$  when the switch  $S_1$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.

**Result:** To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_2$ .

**Solution:** The ideal voltage source  $U_{eq}$  is given by  $U_{eq} = U \cdot \frac{R_2}{R_1 + R_2}$  and the internal resistance  $R_{eq} = R_1 || R_2$ .

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_2$ .



The circuit contains a voltage source  $U=12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1=20 \text{ }\Omega$  and a capacitor of  $C=100 \text{ }\mu\text{F}$ . The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first task. At the moment  $t_0=0 \text{ s}$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0)=0 \text{ V}$ .



First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time  $t_1$  when  $u_c(t_1)=0.5 \cdot U$ .

Solution



So, here only  $R_1$  and  $C$  gives the time constant:  $\tau = R_1 \cdot C$

The following formula describes the time course of  $u_c(t)$  which has to be  $u_c(t_1)=0.5 \cdot U$ :  

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5$   
 An equivalent linear voltage source can be given with  $U_s$ ,  $R_1$ , and  $R_B$  as seen in yellow:  

$$U_s = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$$
 The internal resistance is given by substituting the ideal voltage source with its resistance ( $=0 \text{ }\Omega$ , short-circuit):  

$$R_i = R_1 \parallel R_B = 10 \text{ }\Omega$$

Therefore, the voltage of the equivalent linear voltage source is:  

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ ms} / (10 \text{ }\Omega \cdot 100 \text{ }\mu\text{F})})$$

**Exercise E1 Charging Capacitors**  
 (written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (as shown in the figure) consists of a DC voltage source  $U=6 \text{ V}$ , a resistor  $R_1=20 \text{ }\Omega$ , a capacitor  $C=20 \text{ }\mu\text{F}$ , a resistor  $R_2=10 \text{ }\Omega$ , and a switch  $S$ . The switch  $S$  is open. The voltage across the capacitor is again  $0 \text{ V}$  at the moment  $t_0=0 \text{ s}$  when the switch  $S$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2=1 \text{ ms}$  after closing the switch.

**Solution**  
 To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_2$ :  

$$U_s = U \cdot \frac{R_2}{R_1 + R_2} = 2 \text{ V}$$

$$R_i = R_1 \parallel R_2 = 14.29 \text{ }\Omega$$

Solution

The ideal voltage source is  $U = 12 \text{ V}$ . The internal voltage source is  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = 12 \cdot \frac{10}{20 + 10} = 4 \text{ V}$ . The internal resistance is  $R_i = R_1 \parallel R_B = 10 \text{ }\Omega$ .


On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_2$ .



The circuit contains a voltage source  $U = 12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1 = 20 \text{ }\Omega$  and a capacitor of  $C = 100 \text{ }\mu\text{F}$ .

The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first asks. At the moment  $t_0 = 0$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0) = 0$ .

First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time  $t_1$  when  $u_c(t_1) = 0.5 \cdot U$ .

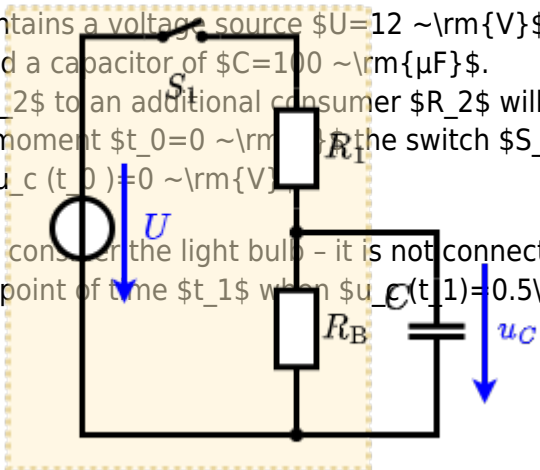

Solution

An equivalent linear voltage source can be given with  $U_s$ ,  $R_1$ , and  $R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$ . The internal resistance is given by substituting the ideal voltage source with its resistance ( $R_i = 0 \text{ }\Omega$ , short-circuit).  $R_i = R_1 \parallel R_B = 10 \text{ }\Omega$ .

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-t_2/(10 \text{ }\Omega \cdot 100 \text{ }\mu\text{F})})$$

So, here only  $R_1$  and  $C$  gives the time constant:  $\tau = R_1 \cdot C$

The following formula describes the time course of  $u_c(t)$  which has to be  $u_c(t_1) = 0.5 \cdot U$ :  $u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$ . It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$

### Exercise E7 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Given that the phasor voltage source  $\underline{U} = 50 \angle 0^\circ$  V and the admittance  $\underline{Y} = 0.24$  S, the current  $\underline{I}$  through the components ( $\$R\$ and  $\$X_L\$) shall be given.$$

After analysis, the full width dimensioned complex impedance  $\underline{Z}$  shall be extracted and the magnitude  $|\underline{Z}|$  in phase (real  $\$Z_L\$ and  $\$Z_C\$) and  $\$Z = (2 + j4) \Omega + 5 \angle 90^\circ \Omega$$$

Solution  
.. Calculation of physical values of the two components.  
Solution  $\varphi_i = \arctan\left(\frac{-10}{4.68}\right) = -61.06^\circ$

Solution

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ}{(2 + j4) + j5} = \frac{50 \angle 0^\circ}{2 + j9} = 5.5 \angle -77.1^\circ \text{ A}$$

The voltage  $\underline{U}_R$  across the resistor is  $\underline{U}_R = \underline{I} \cdot R = 5.5 \angle -77.1^\circ \cdot 2 = 11 \angle -77.1^\circ$  V. The voltage  $\underline{U}_L$  across the inductor is  $\underline{U}_L = \underline{I} \cdot jX_L = 5.5 \angle -77.1^\circ \cdot j4 = 22 \angle -7.1^\circ$  V.

Therefore, the component  $\$R\$ is in phase with the source voltage  $\$U\$ and the component  $\$X_L\$ is leading by  $\$90^\circ\$. The resulting impedance  $\$Z\$ is  $\$Z = 2 + j9 \Omega\$. The magnitude of the impedance is  $\$|Z| = \sqrt{2^2 + 9^2} = 9.4 \Omega\$. The phase angle is  $\$\varphi_Z = \arctan(9/2) = 77.1^\circ\$. The current  $\$I\$ is  $\$I = \frac{U}{Z} = \frac{50 \angle 0^\circ}{9.4 \angle 77.1^\circ} = 5.3 \angle -77.1^\circ \text{ A}\$.$$$$$$$$$$

With the complex part  $\$Z = 2 + j9 \Omega\$, the physical values  $\$R = 2 \Omega\$,  $\$X_L = 9 \Omega\$, and  $\$X_C = -10 \Omega\$. The phase angle  $\$\varphi_Z\$ can be calculated as  $\$\varphi_Z = \arctan\left(\frac{9}{2}\right) = 77.1^\circ\$. The magnitude of the impedance is  $\$|Z| = \sqrt{2^2 + 9^2} = 9.4 \Omega\$. The current  $\$I\$ is  $\$I = \frac{U}{Z} = \frac{50 \angle 0^\circ}{9.4 \angle 77.1^\circ} = 5.3 \angle -77.1^\circ \text{ A}\$.$$$$$$$$$

The phase  $\$\varphi_i\$ can be calculated as  $\$\varphi_i = \arctan\left(\frac{-10}{4.68}\right) = -61.06^\circ\$. The magnitude of the current is  $\$|I| = \frac{50}{9.4} = 5.3 \text{ A}\$. The current  $\$I\$ is  $\$I = 5.3 \angle -61.06^\circ \text{ A}\$.$$$$$

### Exercise E1 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Given that the phasor voltage source  $\underline{U} = 50 \angle 0^\circ$  V and the admittance  $\underline{Y} = 0.24$  S, the current  $\underline{I}$  through the components ( $\$R\$ and  $\$X_L\$) shall be given.$$

After analysis, the full width dimensioned complex impedance  $\underline{Z}$  shall be extracted and the magnitude  $|\underline{Z}|$  in phase (real  $\$Z_L\$ and  $\$Z_C\$) and  $\$Z = (2 + j4) \Omega + 5 \angle 90^\circ \Omega$$$

Solution  
.. Calculation of physical values of the two components.  
Solution  $\varphi_i = \arctan\left(\frac{-10}{4.68}\right) = -61.06^\circ$

Solution

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ}{(2 + j4) + j5} = \frac{50 \angle 0^\circ}{2 + j9} = 5.5 \angle -77.1^\circ \text{ A}$$

The voltage  $\underline{U}_R$  across the resistor is  $\underline{U}_R = \underline{I} \cdot R = 5.5 \angle -77.1^\circ \cdot 2 = 11 \angle -77.1^\circ$  V. The voltage  $\underline{U}_L$  across the inductor is  $\underline{U}_L = \underline{I} \cdot jX_L = 5.5 \angle -77.1^\circ \cdot j4 = 22 \angle -7.1^\circ$  V.

The absolute value of the impedance is  $Z = \sqrt{R^2 + (X_L - X_C)^2}$  and the phase angle is  $\phi = \arctan\left(\frac{X_L - X_C}{R}\right)$ .  
 With the complex part comes the physical value:  $X_L = \omega L$  and  $X_C = \frac{1}{\omega C}$ .  
 The phase angle is  $\phi = \arctan\left(\frac{X_L - X_C}{R}\right) = \arctan\left(\frac{4.68 \sim \Omega - 300 \tan^{-1}\left(\frac{-4.68 \sim \Omega}{0.24 \sim \Omega}\right)}{1.00 \sim \Omega}\right)$ .

**Exercise E8 Impedances at different Frequencies**  
 (written test, approx. 18 % of a 60-minute written test, WS2022)

At a series circuit with  $R_1 = 1.00 \sim \Omega$ ,  $R_2 = 4.70 \sim \mu\text{H}$ , and  $C_1 = 40 \sim \text{nF}$  at  $f = 4 \sim \text{MHz}$ .  
 Result:  $Z = 1.00 \sim \Omega$ ,  $\phi = 0^\circ$ .  
 A resistor  $R_1$  shall have the same absolute value of the impedance as a capacitor  $C_1 = 40 \sim \text{nF}$  at  $f = 4 \sim \text{MHz}$ .

Solution  
 Solution  $R_1 = 1.00 \sim \Omega$   
 Solution  $R_2 = 4.70 \sim \mu\text{H}$   
 A series circuit means that the current is constant on every component.  
 The equivalent impedance for  $R_2$  and  $C_1$  combined is given by  $Z_{RC} = \sqrt{R_2^2 + \left(\frac{1}{\omega C_1}\right)^2}$ .  
 Parallel circuit means that the voltage is the same on  $R_2$  and  $C_1$ .  
 The resulting current of the parallel circuit is given as:  $I_{RC} = \frac{U}{Z_{RC}}$ .  
 This can be simplified to  $I_{RC} = \frac{U}{\sqrt{R_2^2 + \left(\frac{1}{\omega C_1}\right)^2}}$ .  
 Back to the first formula:  $R_1 \cdot I_{RC} = I_{RC} \cdot Z_{RC}$ .

**Exercise E9 Impedances at different Frequencies**  
 (written test, approx. 18 % of a 60-minute written test, WS2022)

**Resistor**  $R_1$  shall have the same absolute value of the impedance as a capacitor  $C_1 = 40 \text{ nF}$  at  $f_1 = 4 \text{ MHz}$ .

**Solution**

$$R_1 = 1.00 \text{ } \Omega$$

$$R_2 = 10.0 \text{ } \Omega$$

A series circuit means that the current is constant on every component.

The equivalent impedance for  $R$  and  $L$  combined is given by

$$Z_{RL} = R + j\omega L$$

Parallel circuit means that the voltage is the same on  $R_2$  and  $C_1$

$$Z_{RC} = \frac{R_2 \cdot (-j/\omega C_1)}{R_2 - j/\omega C_1}$$

Since  $R_2$  and  $C_1$  are perpendicular to each other, this can be simplified to

$$Z_{RC} = \frac{R_2}{1 + j\omega R_2 C_1}$$

(It has to, since  $R_2$  is perpendicular to  $j\omega L$  and  $-j/\omega C_1$  to  $R_2$ )

Therefore, the resulting current of the parallel circuit is given as:

$$I_{3R} = I_{3R} + I_{3C}$$

This can be rearranged to get  $R_3$

$$R_3 = \frac{I_{3R}}{I_{3R} - I_{3C}}$$

$$R_3 = \frac{3.0 \text{ V} \cdot \sin(2\pi \cdot 15 \text{ kHz} \cdot t)}{\sqrt{(3.0 \text{ V})^2 - (2\pi \cdot 450 \text{ kHz} \cdot 4.7 \text{ } \mu\text{H})^2}}$$

Back to the first formula:

$$R_3 \cdot I_{3R} = X_{3C} \cdot I_{3C}$$

$$R_3 = \frac{X_{3C} \cdot I_{3C}}{I_{3R} - I_{3C}}$$

$$R_3 = \frac{1}{\frac{I_{3R}}{I_{3C}} - 1} \cdot \frac{1}{2\pi \cdot f \cdot C_3} \cdot \sqrt{I_{3R}^2 - I_{3C}^2}$$

**Exercise E10 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)**

**1. Calculate the complex impedance  $Z$  of the circuit shown in the diagram. The voltage source  $u(t) = 3.0 \text{ V} \cdot \sin(2\pi \cdot 15 \text{ kHz} \cdot t)$  is connected with an inductor of  $330 \text{ } \mu\text{H}$  and a capacitor of  $0.22 \text{ } \mu\text{F}$ , all in series.**

**Solution**

**Result**

$$Z = 48.2 \text{ } \Omega \quad Z_C = 19.8 \text{ } \Omega$$

Draw the circuit diagram of the given circuit with all components, voltages, and currents.

$$Z = \frac{U}{I} \quad I = \frac{U}{Z} \quad Z_C = \frac{1}{2\pi \cdot f \cdot C}$$

**Result**

$$Z = \frac{3.0 \text{ V}}{\sqrt{2} \cdot \frac{3.0 \text{ V}}{\sqrt{2}} \cdot \frac{1}{\sqrt{2}}} = \frac{3.0 \text{ V}}{3.0 \text{ V} \cdot \frac{1}{\sqrt{2}}} = \sqrt{2} \text{ } \Omega$$

$$Z_C = \frac{1}{2\pi \cdot 15 \text{ kHz} \cdot 0.22 \text{ } \mu\text{F}} = 19.8 \text{ } \Omega$$

$$Z = R + jZ_L - jZ_C = R + j(Z_L - Z_C) = \sqrt{2} \text{ } \Omega + j(48.2 \text{ } \Omega - 19.8 \text{ } \Omega)$$

$$Z = \sqrt{2} \text{ } \Omega + j28.4 \text{ } \Omega$$

$$|Z| = \sqrt{(\sqrt{2})^2 + (28.4)^2} = 28.4 \text{ } \Omega$$

□□□□□□□□□□ 10510...



**Exercise E1 Complex Impedance Circuit**  
**(written test, approx. 15 % of a 60-minute written test, WS2022)**

1. Calculate the current  $i(t)$  in the circuit shown in Fig. 1. The voltage source is  $u(t) = 3.0 \sin(2\pi \cdot 15 \cdot t)$  V. The circuit consists of a resistor of  $R = 10 \Omega$ , an inductor of  $L = 330 \mu\text{H}$ , and a capacitor of  $C = 0.22 \mu\text{F}$ , all in series.

Result

$$Z = 19.8 \Omega \quad |Z| = 19.8 \Omega \quad \phi = 48.2^\circ$$

Draw the circuit diagram of the given circuit and label all components, voltages, and currents.

$$Z = \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \quad Z_C = \frac{1}{2\pi \cdot f \cdot C} = \frac{1}{2\pi \cdot 15 \cdot 0.22 \cdot 10^{-6}} \approx 380 \Omega$$

Result  $f = 15 \text{ kHz} \cdot 0.22 \mu\text{F} \approx 207 \text{ kHz}$

$$\hat{I} = \frac{\hat{U}}{|Z|} = \frac{3 \text{ V}}{19.8 \Omega} \approx 0.15 \text{ A}$$

$$i(t) = 0.15 \sin(2\pi \cdot 15 \cdot t - 48.2^\circ) \text{ A}$$

$$\underline{Z} = R + j\underline{Z}_L - j\underline{Z}_C = 10 + j\omega L - j\omega C = 10 + j(2\pi \cdot 15 \cdot 330 \cdot 10^{-6}) - j(2\pi \cdot 15 \cdot 0.22 \cdot 10^{-6}) = 10 + j0.031 - j0.020 = 10 + j0.011 \Omega$$

$$|Z| = \sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2} = \sqrt{10^2 + 0.011^2} \approx 10 \Omega$$

5510





From:  
<https://wiki.mexle.org/> - **MEXLE Wiki**

Permanent link:  
[https://wiki.mexle.org/electrical\\_engineering\\_1/ws2022\\_exam?rev=1680386998](https://wiki.mexle.org/electrical_engineering_1/ws2022_exam?rev=1680386998)

Last update: **2023/04/02 00:09**

