

# Exam Winter Semester 2022

## Student Group

First Name	Surname	Matrikel Nr.

## Table of Contents

**Exam Winter Semester 2022** ..... 2

    Additional permitted Aids ..... 2

    Hits ..... 2

    Tasks ..... 2

        Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 2

        Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 2

        Exercise E2 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) ..... 3

        Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 5

        Exercise E1 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) ..... 9

        Exercise E4 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 10

        Exercise E1 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) ..... 11

        Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) ..... 12

# Exam Winter Semester 2022

## Additional permitted Aids

- non-programmable calculator,
- formulary (2 DIN A4 pages)

## Hits

- The duration of the exam is 60 min.
- Attempts to cheat will lead to exclusion and failure of the exam.
- Withdrawal is no longer possible after these exam has been handed out.
- Please write down intermediate calculations and results on the assignment sheet. (when more space is needed also on the reverse side. In this case: Mark it clearly).
- Always use units in the calculation.
- Use a document-proof, non-red pen.

## Tasks

### Exercise E1 Resistance of a Wire by Resistivity

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. Heating elements are used to heat wire with a temperature of  $180^\circ\text{C}$ . The electric power dissipation (= heat flow) of  $P=40\text{ W}$  is necessary.

Calculate the current  $I$  needed to operate for heating elements.

The Nichrome wire has a resistivity of  $1.10 \cdot 10^{-6}\ \Omega\text{m}$ .

The heating element is  $3\text{ m}$  long and has a diameter of  $3.57\text{ mm}$ .

∴ Calculate the resistance  $R$  of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \\ \sqrt{\frac{P}{R}} &= \sqrt{\frac{40\text{ W}}{0.33\ \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \& \quad | \text{with } A = r^2 \cdot \pi = \\ \frac{1}{4} d^2 \cdot \pi \quad \& \quad R &= \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = \\ 1.10 \cdot 10^{-6}\ \Omega\text{m} \cdot \frac{4 \cdot 3\text{ m}}{(3.57 \cdot 10^{-3}\text{ m})^2 \cdot \pi} \end{aligned}$$

### Exercise E1 Temperature-dependent Resistance

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. A resistor is exposed to a temperature increase from  $20^\circ\text{C}$  to  $100^\circ\text{C}$ . The resistor has a

Resistance of system  $R = 10 \text{ k}\Omega$  at  $25^\circ\text{C}$ .  
 Its temperature coefficients are:  $\alpha = 0.01 \text{ } \frac{1}{\text{K}}$  and  $\beta = 71 \cdot 10^{-6} \text{ } \frac{1}{\text{K}^2}$

**Result**  
 The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .

... Calculation of  $R$  at  $-40^\circ\text{C}$  using the integral  $\int \frac{1}{T^2} dT = -\frac{1}{T} + C$ .

Resistance of resistor  $R$  depends on the current and generated heat. Therefore, a solution is to heat up the refrigeration system.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$\begin{aligned} R &= R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) && | \\ \text{with } \Delta T &= T_{\text{end}} - T_{\text{start}} && \\ R &= 10 \text{ k}\Omega \cdot \left(1 + 0.01 \frac{1}{\text{K}} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \frac{1}{\text{K}^2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2\right) && \end{aligned}$$


**Exercise E2 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)**

The following shall hold:  $R_1 = 20 \text{ }\Omega$ ,  $R_2 = 10 \text{ }\Omega$ ,  $R_3 = 10 \text{ }\Omega$ ,  $R_4 = 10 \text{ }\Omega$ ,  $R_5 = 10 \text{ }\Omega$ ,  $R_6 = 10 \text{ }\Omega$ ,  $R_7 = 10 \text{ }\Omega$ ,  $R_8 = 10 \text{ }\Omega$ ,  $R_9 = 10 \text{ }\Omega$ ,  $R_{10} = 10 \text{ }\Omega$ ,  $R_{11} = 10 \text{ }\Omega$ ,  $R_{12} = 10 \text{ }\Omega$ ,  $R_{13} = 10 \text{ }\Omega$ ,  $R_{14} = 10 \text{ }\Omega$ ,  $R_{15} = 10 \text{ }\Omega$ ,  $R_{16} = 10 \text{ }\Omega$ ,  $R_{17} = 10 \text{ }\Omega$ ,  $R_{18} = 10 \text{ }\Omega$ ,  $R_{19} = 10 \text{ }\Omega$ ,  $R_{20} = 10 \text{ }\Omega$ ,  $R_{21} = 10 \text{ }\Omega$ ,  $R_{22} = 10 \text{ }\Omega$ ,  $R_{23} = 10 \text{ }\Omega$ ,  $R_{24} = 10 \text{ }\Omega$ ,  $R_{25} = 10 \text{ }\Omega$ ,  $R_{26} = 10 \text{ }\Omega$ ,  $R_{27} = 10 \text{ }\Omega$ ,  $R_{28} = 10 \text{ }\Omega$ ,  $R_{29} = 10 \text{ }\Omega$ ,  $R_{30} = 10 \text{ }\Omega$ ,  $R_{31} = 10 \text{ }\Omega$ ,  $R_{32} = 10 \text{ }\Omega$ ,  $R_{33} = 10 \text{ }\Omega$ ,  $R_{34} = 10 \text{ }\Omega$ ,  $R_{35} = 10 \text{ }\Omega$ ,  $R_{36} = 10 \text{ }\Omega$ ,  $R_{37} = 10 \text{ }\Omega$ ,  $R_{38} = 10 \text{ }\Omega$ ,  $R_{39} = 10 \text{ }\Omega$ ,  $R_{40} = 10 \text{ }\Omega$ ,  $R_{41} = 10 \text{ }\Omega$ ,  $R_{42} = 10 \text{ }\Omega$ ,  $R_{43} = 10 \text{ }\Omega$ ,  $R_{44} = 10 \text{ }\Omega$ ,  $R_{45} = 10 \text{ }\Omega$ ,  $R_{46} = 10 \text{ }\Omega$ ,  $R_{47} = 10 \text{ }\Omega$ ,  $R_{48} = 10 \text{ }\Omega$ ,  $R_{49} = 10 \text{ }\Omega$ ,  $R_{50} = 10 \text{ }\Omega$ ,  $R_{51} = 10 \text{ }\Omega$ ,  $R_{52} = 10 \text{ }\Omega$ ,  $R_{53} = 10 \text{ }\Omega$ ,  $R_{54} = 10 \text{ }\Omega$ ,  $R_{55} = 10 \text{ }\Omega$ ,  $R_{56} = 10 \text{ }\Omega$ ,  $R_{57} = 10 \text{ }\Omega$ ,  $R_{58} = 10 \text{ }\Omega$ ,  $R_{59} = 10 \text{ }\Omega$ ,  $R_{60} = 10 \text{ }\Omega$ ,  $R_{61} = 10 \text{ }\Omega$ ,  $R_{62} = 10 \text{ }\Omega$ ,  $R_{63} = 10 \text{ }\Omega$ ,  $R_{64} = 10 \text{ }\Omega$ ,  $R_{65} = 10 \text{ }\Omega$ ,  $R_{66} = 10 \text{ }\Omega$ ,  $R_{67} = 10 \text{ }\Omega$ ,  $R_{68} = 10 \text{ }\Omega$ ,  $R_{69} = 10 \text{ }\Omega$ ,  $R_{70} = 10 \text{ }\Omega$ ,  $R_{71} = 10 \text{ }\Omega$ ,  $R_{72} = 10 \text{ }\Omega$ ,  $R_{73} = 10 \text{ }\Omega$ ,  $R_{74} = 10 \text{ }\Omega$ ,  $R_{75} = 10 \text{ }\Omega$ ,  $R_{76} = 10 \text{ }\Omega$ ,  $R_{77} = 10 \text{ }\Omega$ ,  $R_{78} = 10 \text{ }\Omega$ ,  $R_{79} = 10 \text{ }\Omega$ ,  $R_{80} = 10 \text{ }\Omega$ ,  $R_{81} = 10 \text{ }\Omega$ ,  $R_{82} = 10 \text{ }\Omega$ ,  $R_{83} = 10 \text{ }\Omega$ ,  $R_{84} = 10 \text{ }\Omega$ ,  $R_{85} = 10 \text{ }\Omega$ ,  $R_{86} = 10 \text{ }\Omega$ ,  $R_{87} = 10 \text{ }\Omega$ ,  $R_{88} = 10 \text{ }\Omega$ ,  $R_{89} = 10 \text{ }\Omega$ ,  $R_{90} = 10 \text{ }\Omega$ ,  $R_{91} = 10 \text{ }\Omega$ ,  $R_{92} = 10 \text{ }\Omega$ ,  $R_{93} = 10 \text{ }\Omega$ ,  $R_{94} = 10 \text{ }\Omega$ ,  $R_{95} = 10 \text{ }\Omega$ ,  $R_{96} = 10 \text{ }\Omega$ ,  $R_{97} = 10 \text{ }\Omega$ ,  $R_{98} = 10 \text{ }\Omega$ ,  $R_{99} = 10 \text{ }\Omega$ ,  $R_{100} = 10 \text{ }\Omega$ .

**Solution**

$$R_{\text{eq}} = 132.8 \text{ }\Omega$$

Now a wye-delta transformation is necessary.

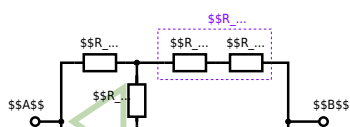


Since  $R_2=R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as: 
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series: 
$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{eq} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance  $R_{eq}$  between A and B.

Solution

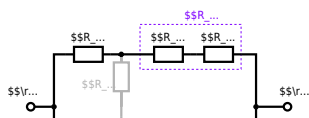


The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_{-1}) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$

**Exercise E3 Equivalent linear Source  
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.  
Result


$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

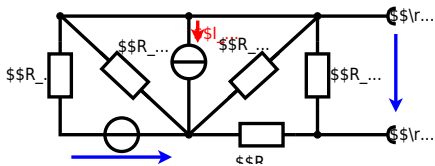


Calculate the internal resistance  $R_{int}$  and the source voltage  $U_s$  of an equivalent linear voltage source on the connectors  $A$  and  $B$ .  $R_1=5.0 \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3=10 \Omega$ ,  $I_4=4.2 \text{ A}$ ,  $R_5=10 \Omega$ ,  $R_6=7.5 \Omega$ ,  $R_7=15 \Omega$ . Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

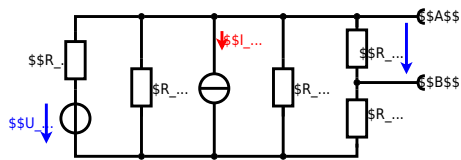

The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :

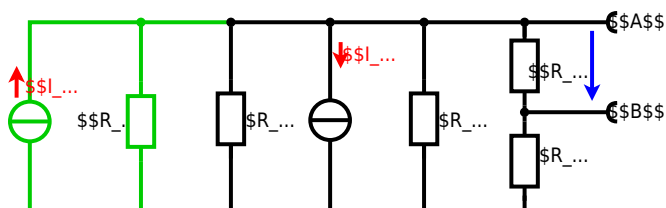

Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following:

$$U_{24} = I_{24} \cdot R_{67}$$

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - \left( \frac{U_2}{R_1} - I_4 \right) \cdot \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5}$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0 \Omega$ , so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with  $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$ :

$$U_{AB} = \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \Omega \cdot \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega}$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$


**Exercise E1 Charging Capacitors**  
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit below is a battery with an internal resistance of  $R_1 = 5 \Omega$  and a charging capacitor  $C = 2 \mu\text{F}$  in parallel with a resistor  $R_2 = 2 \Omega$ . The voltage across the capacitor is again  $0 \text{ V}$  at the moment  $t_0 = 0 \text{ s}$  when the switch  $S_1$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.


**Solution:** To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_2$ .

$$U_{eq} = \frac{U}{1 + \frac{R_1}{R_2}} = \frac{12 \text{ V}}{1 + \frac{5 \Omega}{2 \Omega}} = 3.6 \text{ V}$$

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_2$ .

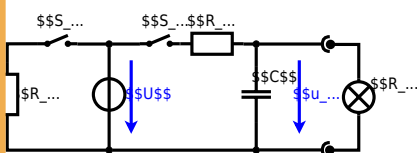


The circuit contains a voltage source  $U=12\text{ V}$ , a switch  $S_1$ , a resistor of  $R_1=20\text{ }\Omega$  and a capacitor of  $C=100\text{ }\mu\text{F}$ . The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first task. At the moment  $t_0=0\text{ s}$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0)=0\text{ V}$ .

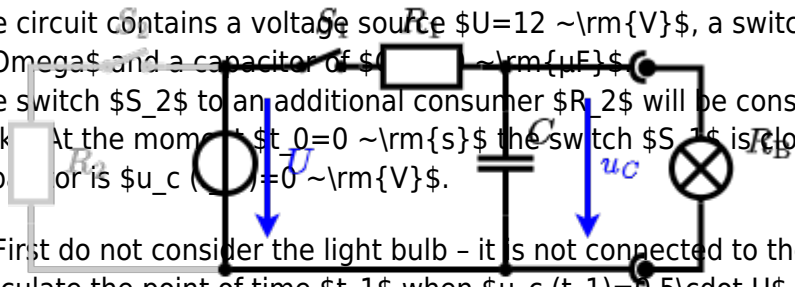

First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time  $t_1$  when  $u_c(t_1)=0.5 \cdot U$ .

Solution

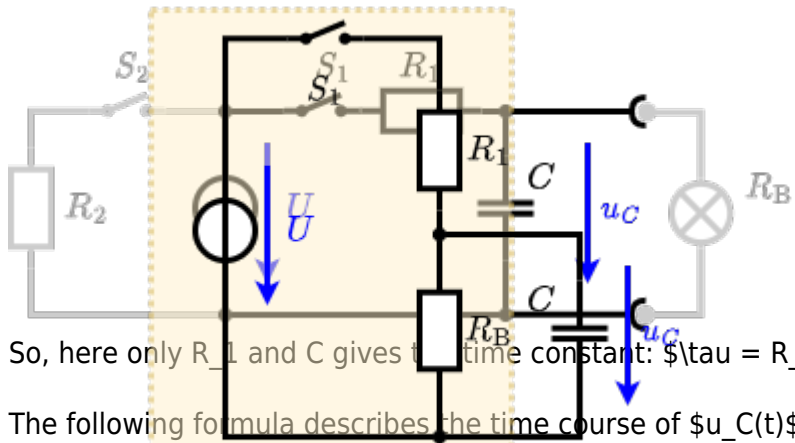

So, here only  $R_1$  and  $C$  gives the time constant:  $\tau = R_1 \cdot C$

The following formula describes the time course of  $u_c(t)$  which has to be  $u_c(t_1)=0.5 \cdot U$ :  

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5$   

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = -\tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$
 An equivalent linear voltage source can be given with  $U_s$ ,  $R_1$  and  $R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$  The internal resistance is given by substituting the ideal voltage source with its resistance ( $=0\text{ }\Omega$ , short-circuit).  

$$R_i = R_1 \parallel R_B = 10\text{ }\Omega$$

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1\text{ ms}/(10\text{ }\Omega \cdot 100\text{ }\mu\text{F})})$$

**Exercise E4 Analyzing complex Impedances**  
 (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage  $\underline{u}_C(\omega)$  of the capacitor  $C$  through the components. ( $R$  and  $\underline{X}_1$ ) shall be given.

After analysis, the following phasors can be extracted (logically) in phasor notation:  $\underline{u}_C(\omega) = (2 + 4j) + 5j\text{ V}$

Solution

.. Calculate the phasor values of the two components.

```

\begin{align*} R_1 &= 1.00 \sim \Omega \\ R_2 &= 10.0 \sim \Omega \\ R_3 &= 100 \sim \Omega \\ L &= 4.7 \sim \mu\text{H} \\ C &= 40 \sim \text{nF} \end{align*}

```

Therefore the absolute value of the impedance is given by

$$|Z| = \sqrt{R^2 + (X_L - X_C)^2}$$

With the complex part comes the physical value:  $X_L = \omega L$  and  $X_C = \frac{1}{\omega C}$

$$X_L = 2\pi \cdot 450 \cdot 4.7 \cdot 10^{-6} = 13.2 \sim \Omega$$

$$X_C = \frac{1}{2\pi \cdot 450 \cdot 40 \cdot 10^{-9}} = 89.5 \sim \Omega$$

The absolute value of the impedance is given by

$$|Z| = \sqrt{100^2 + (13.2 - 89.5)^2} = 100 \sim \Omega$$

The phase  $\varphi$  can be calculated as

$$\varphi = \arctan\left(\frac{X_L - X_C}{R}\right) = \arctan\left(\frac{13.2 - 89.5}{100}\right) = -4.68 \sim \text{rad}$$

**Exercise E1 Impedances at different Frequencies**  
**(written test, approx. 18 % of a 60-minute written test, WS2022)**

A series circuit with a resistor  $R_1 = 1.00 \sim \Omega$ , a capacitor  $C = 40 \sim \text{nF}$ , and an inductor  $L = 4.7 \sim \mu\text{H}$  is connected to an AC voltage source with a nominal current of  $I = 100 \sim \text{mA}$  and a frequency of  $f = 450 \sim \text{kHz}$ . The impedance of the resistor  $R_1$  shall have the same absolute value of the impedance as a capacitor  $C$  at  $f = 4 \sim \text{MHz}$ .

```

\begin{align*} R_1 &= 1.00 \sim \Omega \\ R_2 &= 10.0 \sim \Omega \end{align*}

```

A series circuit means that the current is constant on every component.

The equivalent impedance for  $R$  and  $L$  combined is given by

$$Z_{RL} = \sqrt{R^2 + X_L^2}$$

Parallel circuit means that the voltage is the same on  $R_2$  and  $C$

$$U = I \cdot Z_{RL} = I \cdot \sqrt{R^2 + X_L^2} = I \cdot R \cdot \sqrt{1 + \left(\frac{X_L}{R}\right)^2}$$

Since  $X_L$  and  $X_C$  are perpendicular to  $R$ , the resulting current of the parallel circuit is given as:

$$I_{3C} = \sqrt{I_{2R}^2 + I_{3C}^2}$$

Therefore the resulting current of the parallel circuit is given as:


$$I_{3C} = \sqrt{I_{2R}^2 + I_{3C}^2}$$

Back to the first formula:

$$R_3 \cdot I_{3C} = X_{3C} \cdot I_{3C} \cdot \frac{I_{3C}}{I_{3C}} = X_{3C} \cdot I_{3C} \cdot \frac{1}{\sqrt{1 + \left(\frac{X_L}{R}\right)^2}}$$





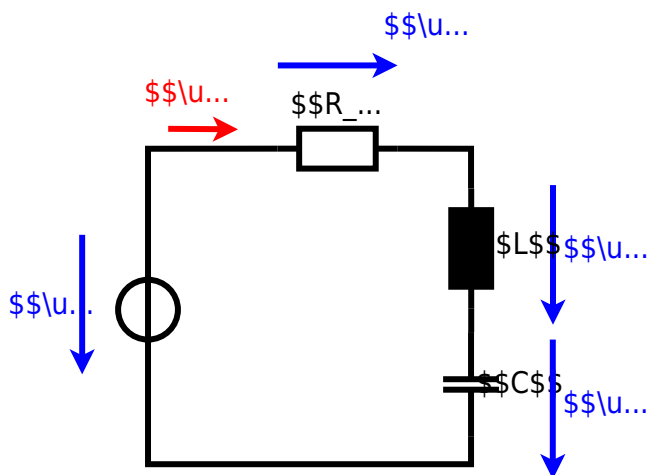

From:  
<https://wiki.mexle.org/> - **MEXLE Wiki**

Permanent link:  
[https://wiki.mexle.org/electrical\\_engineering\\_and\\_electronics\\_1/ws2022\\_exam?rev=1768171359](https://wiki.mexle.org/electrical_engineering_and_electronics_1/ws2022_exam?rev=1768171359)

Last update: **2026/01/11 23:42**

