

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

- Exam Winter Semester 2022** 2
- Additional permitted Aids 2
- Hits 2
- Tasks 2
- Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) 2
- Exercise E3 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 2
- Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) 3
- Exercise E2 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 5
- Exercise E1 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) 9
- Exercise E1 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) 10
- Exercise E9 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) 11
- Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) 12

Exam Winter Semester 2022

Additional permitted Aids

- non-programmable calculator,
- formulary (2 DIN A4 pages)

Hits

- The duration of the exam is 60 min.
- Attempts to cheat will lead to exclusion and failure of the exam.
- Withdrawal is no longer possible after these exam has been handed out.
- Please write down intermediate calculations and results on the assignment sheet. (when more space is needed also on the reverse side. In this case: Mark it clearly).
- Always use units in the calculation.
- Use a document-proof, non-red pen.

Tasks

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

2. Heating elements are used to heat wire with a temperature of 180°C . The electric power dissipation (= heat flow) of $P=40\text{ W}$ is necessary. Calculate the current I needed to operate for heating elements. The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6}\ \Omega\text{m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .
 Solution: $R = 1.10 \cdot 10^{-6}\ \Omega\text{m} \cdot \frac{L}{A}$
 ∴ Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40\text{ W}}{0.33\ \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{L}{A} \quad \text{with } A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \\ R &= \rho \cdot \frac{L}{\frac{1}{4} d^2 \cdot \pi} \quad \text{and } R = 1.10 \cdot 10^{-6}\ \Omega\text{m} \cdot \frac{4 \cdot 3\text{ m}}{(3.57 \cdot 10^{-3}\text{ m})^2 \cdot \pi} \end{aligned}$$

Exercise E3 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. A resistor is specified with the factor α in its marking. The resistor has a

Resistance of system $R = 10 \text{ k}\Omega$ at 25°C .
 Its temperature coefficients are: $\alpha = 0.01 \text{ } \frac{1}{\text{K}}$ and $\beta = 71 \cdot 10^{-6} \text{ } \frac{1}{\text{K}^2}$

Result
 The temperature inside the refrigeration system can reach down to -40°C .

... Calculation of resistance of the resistor at -40°C .

Resistance of the resistor R depends on the current and generated heat. Therefore, a solution is to heat up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

with $\Delta T = T_{\text{end}} - T_{\text{start}}$

$$R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \frac{1}{\text{K}} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \frac{1}{\text{K}^2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2\right)$$


Exercise E1 Pure Resistor Network Simplification
 (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall hold: $R_1 = 200 \text{ }\Omega$, $R_2 = 100 \text{ }\Omega$, $R_3 = 100 \text{ }\Omega$ and the voltage $U = 10 \text{ V}$.
Result $R_{\text{eq}} = 132.8 \text{ }\Omega$.

Solution

$$R_{\text{eq}} = 132.8 \text{ }\Omega$$

Now a wye-delta transformation is necessary.

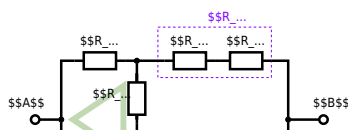


Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:
$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{eq} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B.

Solution

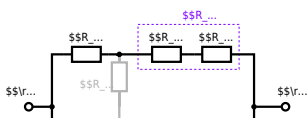


The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_{-1}) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$

**Exercise E2 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result


$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

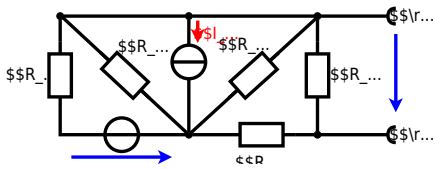


Calculate the internal resistance R_{int} and the source voltage U_s of an equivalent linear voltage source on the connectors A and B . $R_1=5.0 \Omega$, $U_2=6.0 \text{ V}$, $R_3= 10 \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \Omega$, $R_6=7.5 \Omega$, $R_7=15 \Omega$ Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

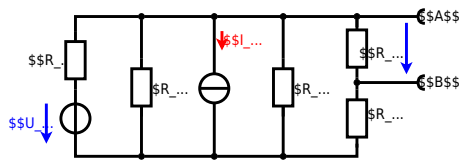

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

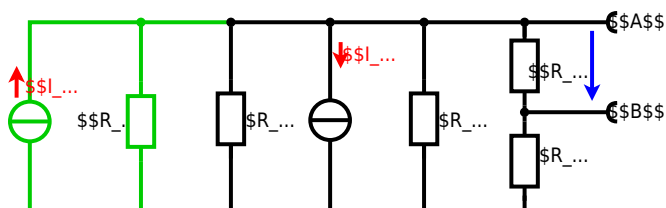

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :
$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$
 The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:
$$U_{24} = I_{24} \cdot R_{24}$$

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - (U_{24} \cdot \frac{R_1}{R_6 + R_7 + R_1 || R_3 || R_5} - I_4) \cdot R_1 || R_3 || R_5$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \Omega \cdot \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega}$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

Exercise E1 Charging Capacitors
(written test, approx. 16 % of a 60-minute written test, WS2022)


The circuit below is a battery with an internal resistance of $R_1 = 5 \Omega$ and a capacitor of $C = 2 \mu\text{F}$ in series with a switch S_1 and a resistor $R_2 = 10 \Omega$. The voltage across the capacitor is again 0 V at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .


The ideal voltage source U_{eq} is given by:

$$U_{eq} = \frac{U \cdot R_2}{R_1 + R_2} = \frac{12 \text{ V} \cdot 10 \Omega}{5 \Omega + 10 \Omega} = 8 \text{ V}$$

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

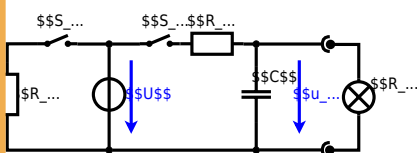


The circuit contains a voltage source $U=12\text{ V}$, a switch S_1 , a resistor of $R_1=20\text{ }\Omega$ and a capacitor of $C=100\text{ }\mu\text{F}$. The switch S_2 to an additional consumer R_2 will be considered to be open for the first task. At the moment $t_0=0\text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0)=0\text{ V}$.

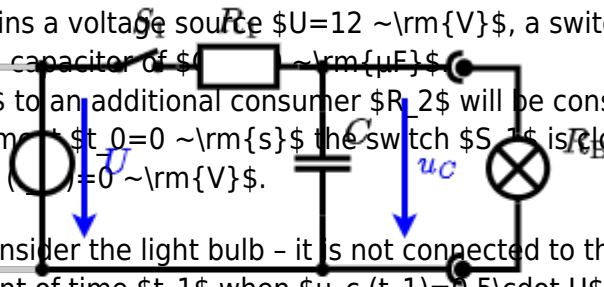

First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time t_1 when $u_c(t_1)=0.5 \cdot U$.

Solution

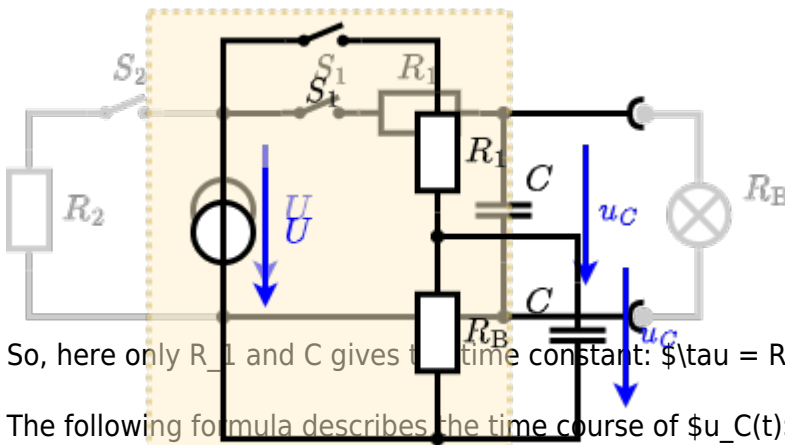

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1)=0.5 \cdot U$:

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$

$$e^{-t/\tau} = 0.5 \implies t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$
 An equivalent linear voltage source can be given with U_s , R_1 and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$ The internal resistance is given by substituting the ideal voltage source with its resistance ($=0\text{ }\Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10\text{ }\Omega$$

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1\text{ ms}/(10\text{ }\Omega \cdot 100\text{ }\mu\text{F})})$$

Exercise E1 Analyzing complex Impedances
 (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage $\underline{u}(t)$ at the terminals X_1 and X_2 through the components. (R and X_1) shall be given.

After analysis, the following phasors can be extracted and given in phasor notation: $\underline{u}(t) = (2 + 4j) + 5j\text{ }\Omega$

Solution

... Calculate the phasor values of the two components.

```

\begin{align*} R_1 &= 1.00 \sim \Omega \\ R_2 &= 10.0 \sim \Omega \\ R_3 &= 100 \sim \Omega \\ L &= 4.7 \sim \mu\text{H} \\ C &= 40 \sim \text{nF} \end{align*}

```

Therefore the absolute value of the impedance is given as
$$|Z| = \sqrt{R^2 + (X_L - X_C)^2}$$

With the complex part comes the physical value:
$$|Z| = \sqrt{R^2 + (X_L - X_C)^2}$$

The phase φ_i can be calculated as
$$\varphi_i = \arctan \left(\frac{\text{Im}()}{\text{Re}()} \right) = \arctan \left(\frac{-4.68 \sim \Omega}{0.24 \sim \Omega} \right)$$

Exercise E9 Impedances at different Frequencies
(written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit with a resistor R_1 shall have the same absolute value of the impedance as a capacitor C at $f = 4 \text{ MHz}$.

```

\begin{align*} R_1 &= 1.00 \sim \Omega \\ R_2 &= 10.0 \sim \Omega \end{align*}

```


A series circuit means that the current is constant on every component.

The equivalent impedance for R and L combined is given by
$$Z = R + jX_L$$

Parallel circuit means that the voltage is the same on R_2 and C
$$\frac{U}{Z} = \frac{U}{R_2} + \frac{U}{Z_C}$$

Therefore the resulting current of the parallel circuit is given as:
$$I_{3C} = I_{3R} + I_{3C}$$

Back to the first formula:
$$R_3 \cdot I_{3C} = X_{3C} \cdot I_{3C} \cdot \frac{I_{3C}}{I_{3R}}$$

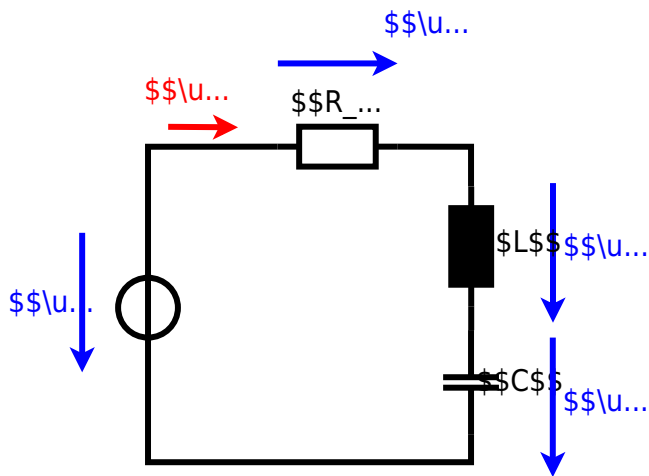

From:
<https://wiki.mexle.org/> - **MEXLE Wiki**

Permanent link:
https://wiki.mexle.org/electrical_engineering_and_electronics_1/ws2022_exam?rev=1768171359

Last update: **2026/01/11 23:42**

