

# Exam Winter Semester 2022

## Student Group

First Name	Surname	Matrikel Nr.

## Table of Contents

**Exam Winter Semester 2022** ..... 2

    Additional permitted Aids ..... 2

    Hits ..... 2

    Tasks ..... 2

        Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 2

        Exercise E3 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 2

        Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) ..... 3

        Exercise E2 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 5

        Exercise E1 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) ..... 9

        Exercise E1 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 10

        Exercise E9 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) ..... 11

        Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) ..... 12

# Exam Winter Semester 2022

## Additional permitted Aids

- non-programmable calculator,
- formulary (2 DIN A4 pages)

## Hits

- The duration of the exam is 60 min.
- Attempts to cheat will lead to exclusion and failure of the exam.
- Withdrawal is no longer possible after these exam has been handed out.
- Please write down intermediate calculations and results on the assignment sheet. (when more space is needed also on the reverse side. In this case: Mark it clearly).
- Always use units in the calculation.
- Use a document-proof, non-red pen.

## Tasks

### Exercise E1 Resistance of a Wire by Resistivity

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. Heating elements made of nichrome wire with a temperature coefficient of  $1.80 \cdot 10^{-4} \text{ K}^{-1}$  are used for electric

power dissipation (= heat flow) of  $P=40 \text{ W}$  is necessary.

Calculate the current  $I$  needed to operate the heating elements.

The Nichrome wire has a resistivity of  $1.10 \cdot 10^{-6} \text{ } \Omega \text{ m}$ .

The heating element is  $3 \text{ m}$  long and has a diameter of  $3.57 \text{ mm}$ .

Calculate the resistance  $R$  of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \\ I &= \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \& \quad | \quad \text{with } A = r^2 \cdot \pi = \\ &= \frac{1}{4} d^2 \cdot \pi \quad \& \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = \\ &= 1.10 \cdot 10^{-6} \text{ } \Omega \text{ m} \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

[resistivity](#), [power](#), [exam ee1 ws2022](#)

### Exercise E3 Temperature-dependent Resistance

**(written test, approx. 6 % of a 60-minute written test, WS2022)**

A. The following exhibits a temperature sensitive component used in a refrigerator. The component has a resistance of  $10 \text{ k}\Omega$  at  $25^\circ\text{C}$ . Its temperature coefficients are:  $\alpha = 0.01 \text{ } \frac{1}{\text{K}}$  and  $\beta = 71 \cdot 10^{-6} \text{ } \frac{1}{\text{K}^2}$ .

Result: The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .

$$R = 10 \text{ k}\Omega \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

Resistance transfer resistor  $R$  is part of the circuit and generates heat. Therefore, a solution is to heat up the refrigeration system.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

$$R = 10 \text{ k}\Omega \cdot (1 + 0.01 \cdot (-40 - 25) + 71 \cdot 10^{-6} \cdot (-40 - 25)^2)$$

[temperature dependent resistance, power, heat, exam ee1 ws2022](#)


**Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)**

The following shall be solved.  $R_1 = 20 \text{ }\Omega$ ,  $R_2 = 10 \text{ }\Omega$ ,  $R_3 = 15 \text{ }\Omega$ ,  $R_4 = 10 \text{ }\Omega$ ,  $R_5 = 10 \text{ }\Omega$  and the voltage  $U = 10 \text{ V}$ . Result:  $R_{\text{eq}}$ .

Solution

$$R_{\text{eq}} = 132.8 \text{ }\Omega$$

Now a wye-delta transformation is necessary.

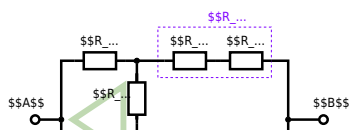


Since  $R_2=R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as: 
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series: 
$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{eq} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance  $R_{eq}$  between A and B.

Solution

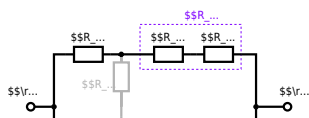

The equivalent resistor is given by a parallel configuration of resistors in series:


$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$

[network simplification, exam ee1 ws2022](#)

**Exercise E2 Equivalent linear Source  
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.  
Result


$$U_s = U_{AB} = 4.5 \text{ V} \quad R_i = R_{AB} = 6 \Omega$$

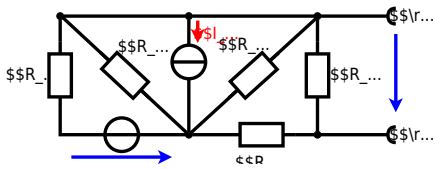


Calculate the internal resistance  $R_i$  and the source voltage  $U_s$  of an equivalent linear voltage source on the connectors  $A$  and  $B$ .  $R_1=5.0 \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3=10 \Omega$ ,  $I_4=4.2 \text{ A}$ ,  $R_5=10 \Omega$ ,  $R_6=7.5 \Omega$ ,  $R_7=15 \Omega$ . Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

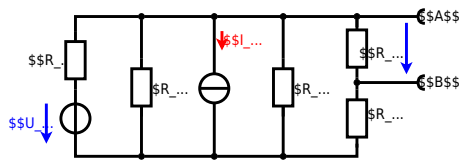

The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :

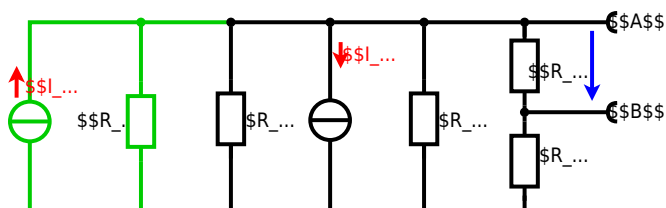

Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following:

$$U_{24} = I_{24} \cdot R_{456}$$

$$U_{24} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) \cdot \left( \frac{U_2}{R_1} - I_4 \right) \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) \cdot \left( \frac{U_2}{R_1} - I_4 \right) \cdot (R_7 \cdot R_1 || R_3 || R_5) / (R_6 + R_7 + R_1 || R_3 || R_5)$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0 \Omega$ , so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with  $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$ :

$$U_{AB} = \left( \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \right) \cdot \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \cdot R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1 ws2022

### Exercise E1 Charging Capacitors


(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit below (realization) consists of a DC voltage source  $U$ , a switch  $S_1$ , a capacitor  $C$ , and a resistor  $R_2$ . The voltage across the capacitor is again  $U$  at the moment  $t_0 = 0 \text{ s}$  when the switch  $S_1$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.


**Solution:** To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_2$ .

$$U_{eq} = U \cdot \frac{R_2}{R_1 + R_2} \quad R_{eq} = R_1 || R_2$$

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_2$ .

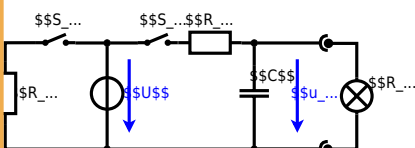


The circuit contains a voltage source  $U=12\text{ V}$ , a switch  $S_1$ , a resistor of  $R_1=20\text{ }\Omega$  and a capacitor of  $C=100\text{ }\mu\text{F}$ . The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first task. At the moment  $t_0=0\text{ s}$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0)=0\text{ V}$ .

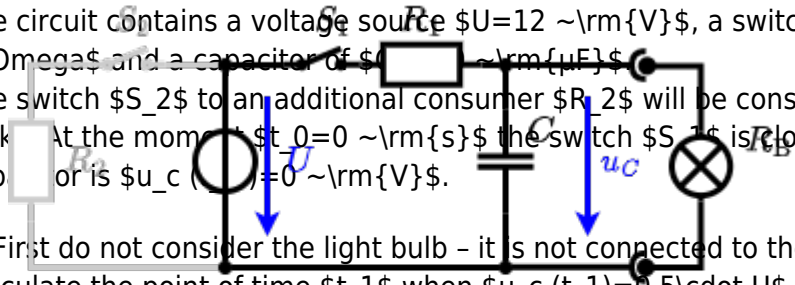

First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time  $t_1$  when  $u_c(t_1)=0.5 \cdot U$ .

Solution

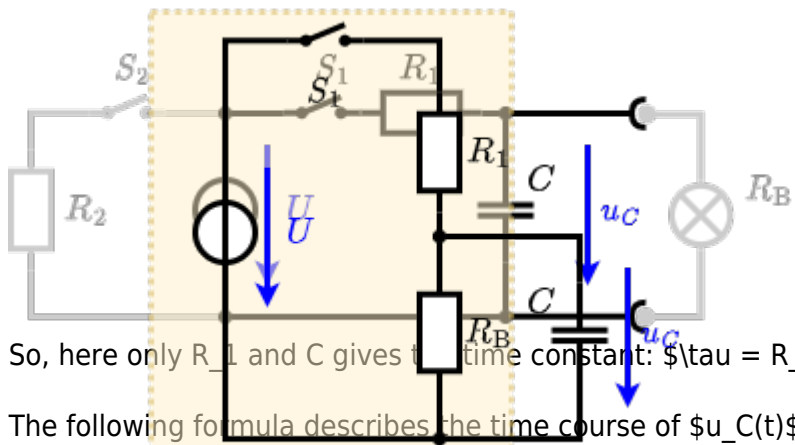

So, here only  $R_1$  and  $C$  gives the time constant:  $\tau = R_1 \cdot C$

The following formula describes the time course of  $u_c(t)$  which has to be  $u_c(t_1)=0.5 \cdot U$ :  

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5$ . An equivalent linear voltage source can be given with  $U_s = U \cdot \frac{R_B}{R_1 + R_B}$  and  $R_i = R_1 \parallel R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$ . The internal resistance is given by substituting the ideal voltage source with its resistance ( $R_i = 0\text{ }\Omega$ , short-circuit).  

$$R_i = R_1 \parallel R_B = 10\text{ }\Omega$$

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1\text{ ms}/(10\text{ }\Omega \cdot 100\text{ }\mu\text{F})})$$

charging capacitors, dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1 ws2022

**Exercise E1 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)**

2. Calculate the open-circuit voltage  $U_{OC}$  and the short-circuit current  $I_{SC}$  of the circuit shown in the figure. The components  $R_1$  and  $X_1$  shall be given.  
 After analysis, the full low-dimensional form impedance  $Z_{eq}$  shall be extracted and given (figure) in parallel to the late  $I_{SC}$  over  $Z_{eq} + 5\text{ j}\text{ }\Omega$

**Solution** Calculate the physical values of the two components.

$$C = 103 \text{ } \mu\text{F}$$

$$R = 10 \text{ } \Omega$$

**Solution**

The current and voltage are in phase once there is only a pure ohmic (= pure real) impedance  $Z$ .

Therefore,  $\omega C = \frac{1}{\omega L}$  with the same  $\omega$  and value of impedance  $Z$ .

$$\omega C = \frac{1}{\omega L} \Rightarrow C = \frac{1}{\omega^2 L}$$

$$C = \frac{1}{(4.68 \times 10^3)^2 \cdot 0.24} = 0.24 \text{ } \mu\text{F}$$

With the complex part comes the physical value:

$$R = \frac{|U|}{|I|} = \frac{50}{\sqrt{0.24^2 + (4.68 \times 10^3)^2 \cdot 0.24^2}} = 10 \text{ } \Omega$$

The phase  $\varphi$  can be calculated as:

$$\varphi = \arctan\left(\frac{\text{Im}(Z)}{\text{Re}(Z)}\right) = \arctan\left(\frac{-4.68 \times 10^3 \cdot 0.24}{0.24}\right)$$

complex impedance, exam ee1 ws2022

**Exercise E9 Impedances at different Frequencies**  
 (written test, approx. 18 % of a 60-minute written test, WS2022)

**Exercise E9** The resistor values  $R_1 = 1 \text{ } \Omega$  and  $R_2 = 10 \text{ } \Omega$  are in a parallel circuit with a capacitor  $C = 40 \text{ nF}$  and an inductor  $L = 4.7 \text{ } \mu\text{H}$ . The current  $I = 100 \text{ mA}$  flows through the parallel circuit. Calculate the absolute value of the impedance  $Z$  and the phase  $\varphi$  of the parallel circuit.

**Solution**

$$R_1 = 1 \text{ } \Omega$$

$$R_2 = 10 \text{ } \Omega$$

A series circuit means that the current is constant on every component.

The equivalent impedance for  $R$  and  $L$  combined is given by:

$$Z_{RL} = \sqrt{R^2 + (\omega L)^2}$$

Parallel circuit means that the voltage is the same on  $R_1$  and  $C$ :

$$U = I \cdot Z_{RL} = I \cdot \sqrt{R^2 + (\omega L)^2} = I \cdot \omega C \cdot Z_{RC}$$

$$\sqrt{R^2 + (\omega L)^2} = \omega C \cdot Z_{RC}$$

Therefore, the resulting current of the parallel circuit is given as:

$$I_{3R} = I_{3R} + I_{3C}$$

This can be rearranged to get  $Z_{RC}$ :

$$Z_{RC} = \frac{I_{3R}}{\omega C} = \frac{I_{3R}}{\omega C} \cdot \sqrt{R^2 + (\omega L)^2}$$

Back to the first formula:

$$R_3 \cdot I_{3R} = Z_{RC} \cdot I_{3R}$$

$$\begin{aligned} |I|_{3C} \parallel R_3 \ \&= \ |X|_{3C} \ \cdot \ \frac{|I|_{3C}}{|I|_{3R}} \ \parallel \ \&= \\ \frac{1}{2\pi \cdot f \cdot C_3} \ \cdot \ \frac{|\sqrt{|I|_3|^2 - |I|_{3R}|^2}|}{|I|_{3R}} \ \parallel \ \end{aligned}$$

complex impedance, exam ee1 ws2022

**Exercise E1 Complex Impedance Circuit**  
(written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the circuit impedance  $Z$ , and the current  $I$  in the circuit. The voltage source is  $u(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$  V. The circuit consists of a resistor of  $10 \ \Omega$ , an inductor of  $330 \ \mu\text{H}$ , and a capacitor of  $0.22 \ \mu\text{F}$ , all in series.

**Result**  
 $Z = 19.8 \ \Omega$  and  $I = 48.2 \ \mu\text{A}$


Draw the circuit diagram of the given circuit and label all components, voltages, and currents.

$$\begin{aligned} Z \ \&= \ \frac{\hat{U}}{\hat{I}} \ \parallel \ \hat{I} \ \&= \ \frac{\hat{U}}{Z} \ \parallel \\ Z_C \ \&= \ \frac{1}{2\pi \cdot f \cdot C} \ \&= \ \frac{1}{2\pi \cdot 15 \ \text{kHz} \cdot 0.22 \ \mu\text{F}} \end{aligned}$$

$$\begin{aligned} \text{With } \frac{1}{\sqrt{2}} \cdot \hat{U} \ \&= \ \frac{1}{\sqrt{2}} \cdot \hat{I} \ \&= \ \frac{1}{\sqrt{2}} \cdot \frac{1}{Z} \ \parallel \ \&= \ \frac{1}{\sqrt{2}} \cdot \frac{1}{\sqrt{R^2 + (Z_L - Z_C)^2}} \ \parallel \\ \frac{1}{\sqrt{2}} \cdot 3.0 \ \text{V} \ \&= \ \frac{1}{\sqrt{2}} \cdot \frac{1}{19.8 \ \Omega} \ \parallel \ \&= \ \frac{1}{\sqrt{2}} \cdot \frac{1}{19.8 \ \Omega} \ \parallel \\ \underline{Z} \ \&= \ R + \underline{Z}_L + \underline{Z}_C \ \parallel \ \&= \ R + j \cdot \omega L - j \cdot \frac{1}{\omega C} \ \parallel \ \underline{Z} \ \parallel \ \&= \\ \sqrt{R^2 + (\omega L - \frac{1}{\omega C})^2} \ \parallel \ \end{aligned}$$





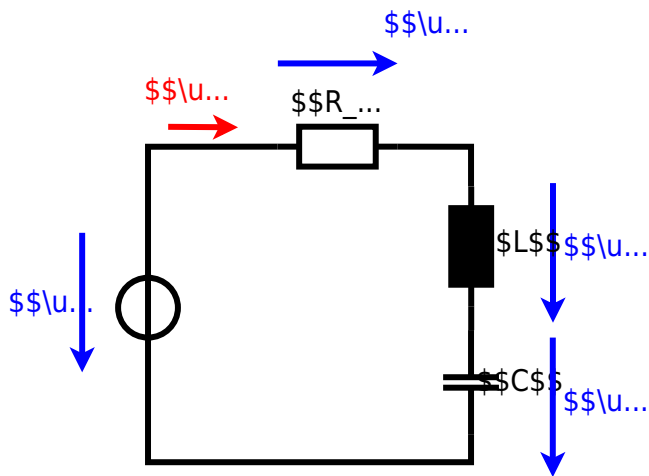

complex impedance, exam ee1 ws2022

From:

<https://wiki.mexle.org/> - **MEXLE Wiki**

Permanent link:

[https://wiki.mexle.org/electrical\\_engineering\\_and\\_electronics\\_1/ws2022\\_exam?rev=1768172507](https://wiki.mexle.org/electrical_engineering_and_electronics_1/ws2022_exam?rev=1768172507)

Last update: **2026/01/12 00:01**

