

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

- Exam Winter Semester 2022** 2
- Additional permitted Aids 2
- Hits 2
- Only EEE1-relevant Part 2
- Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) 2
- Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 3
- Exercise E2 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) 3
- Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 5
- Full Exam 9
- Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) 9
- Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 10
- Exercise E2 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) 10
- Exercise E3 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 12
- Exercise E1 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) 16
- Exercise E4 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) 17
- Exercise E1 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) 17
- Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) 18

Exam Winter Semester 2022

Additional permitted Aids

- non-programmable calculator,
- formulary (2 DIN A4 pages)

Hits

- The duration of the exam is 60 min.
- Attempts to cheat will lead to exclusion and failure of the exam.
- Withdrawal is no longer possible after these exam has been handed out.
- Please write down intermediate calculations and results on the assignment sheet. (when more space is needed also on the reverse side. In this case: Mark it clearly).
- Always use units in the calculation.
- Use a document-proof, non-red pen.

Only EEE1-relevant Part

This part is only for about 20..25 minutes !

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

2. The heating element made of nichrome wire with a temperature coefficient of $1.80 \cdot 10^{-4} \text{ K}^{-1}$ Electric power dissipation (= heat flow) of $P=40 \text{ W}$ is necessary. Calculate the current I needed to operate it for heating elements. The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6} \text{ } \Omega \text{ m}$. The heating element is 3 m long and has a diameter of 3.57 mm .
 Solution in align^* $R = \rho \cdot \frac{l}{A}$ align^*
 ∴ Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \text{with } A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \\ R &= \rho \cdot \frac{l}{\frac{1}{4} d^2 \cdot \pi} \quad \text{and } R = 1.10 \cdot 10^{-6} \text{ } \Omega \text{ m} \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. A refrigerator, which has a temperature coefficient of resistance α and a temperature T_0 has a resistance of R_0 at T_0 . Calculate the resistance of the thermistor at T_1 .

Its temperature coefficients are: $\alpha = 0.01 \cdot 10^{-6} \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

Result: The temperature inside the refrigeration system can reach down to $-40 \text{ }^\circ\text{C}$.

Calculate the resistance of the thermistor at $-40 \text{ }^\circ\text{C}$.

The power transfered to the load of the circuit and of the heat. Therefore, a solution is to increase the resistance of the thermistor.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

$$\Delta T = T_{\text{end}} - T_{\text{start}} = 10 \text{ K} - 25 \text{ K} = -15 \text{ K}$$

$$R = 10 \text{ K} \cdot \Omega \cdot (1 + 0.01 \cdot 10^{-6} \text{ K}^{-1} \cdot (-15 \text{ K}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-15 \text{ K})^2)$$


Exercise E2 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at $0 \text{ }^\circ\text{C}$. Calculate R_{eq} and P_{B} and the voltage U_{B} across the resistor R_{B} .

Solution

$$R_{\text{eq}} = 132.8 \text{ } \Omega$$

Now a wye-delta transformation is necessary.

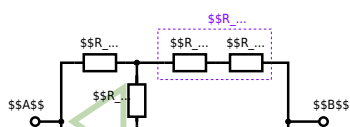


Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:
$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{eq} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B.

Solution

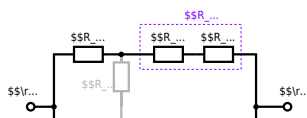


The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_{-1}) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$

**Exercise E3 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result


$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

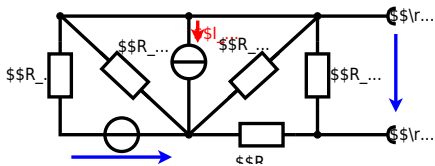


Calculate the internal resistance R_i and the source voltage U_s of an equivalent linear voltage source on the connectors A and B . $R_1=5.0 \Omega$, $U_2=6.0 \text{ V}$, $R_3= 10 \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \Omega$, $R_6=7.5 \Omega$, $R_7=15 \Omega$ Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

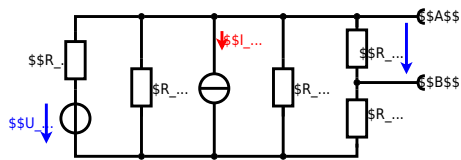

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

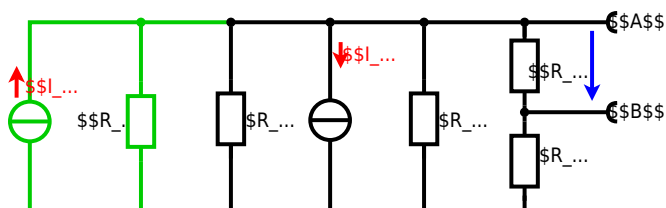

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :
$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$
 The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:
$$U_{24} = I_{24} \cdot R_{135}$$

$$U_{24} = U_{24} \cdot \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 \parallel R_3 \parallel R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} \right) \cdot \left(\frac{U_2}{R_1} - I_4 \right) \cdot \left(\frac{R_7 \cdot R_1 \parallel R_3 \parallel R_5}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} \right)$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$

with $R_1 \parallel R_3 \parallel R_5 = 5\Omega \parallel 10\Omega \parallel 10\Omega = 5\Omega \parallel 5\Omega = 2.5\Omega$:

$$U_{AB} = \left(\frac{6.0\text{V}}{5.0\Omega} - 4.2\text{A} \right) \cdot \left(\frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \right)$$

$$R_{AB} = 15\Omega \parallel (7.5\Omega + 2.5\Omega)$$

Full Exam

These is the full exam

Full exam

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

The heating element made of nichrome wire with a cross-section of 1.80mm^2 . Each second, a power dissipation (= heat flow) of $P=40\text{W}$ is necessary. Determine the current I needed to operate for heating elements. The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6}\Omega\text{m}$. The heating element is 3m long and has a diameter of 3.57mm . Calculate the resistance R of the heating element.

Solution

$$P = U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40\text{W}}{0.33\Omega}}$$

$$R = \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \quad \rightarrow \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \rightarrow \quad R = 1.10 \cdot 10^{-6}\Omega\text{m} \cdot \frac{4 \cdot 3\text{m}}{(3.57\text{mm})^2 \cdot \pi}$$

$$3 \cdot 10^{-3} \cdot (3.57 \cdot 10^{-3} \cdot R)^2 \cdot \pi$$

[electrical_engineering_and_electronics:task_rj0r6j4apumukrj6_with_calculation](#)
[resistivity, power, exam ee1 ws2022](#)

Exercise E1 Temperature-dependent Resistance
(written test, approx. 6 % of a 60-minute written test, WS2022)

A refrigerator is explained with the effect of temperature on the resistance of a resistor. The resistor has a resistance of $10 \text{ } \Omega$ at $25 \text{ } ^\circ\text{C}$. Its temperature coefficients are: $\alpha = 0.01 \text{ } \text{K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ } \text{K}^{-2}$.

The temperature inside the refrigeration system can reach down to $-40 \text{ } ^\circ\text{C}$.

Result

Calculate the resistance of the thermistor at $-40 \text{ } ^\circ\text{C}$.

The power transferred to the resistor and generated heat $P = I^2 R$ is the same as the heat flow. Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

$$R = 10 \cdot (1 + 0.01 \cdot (-40 - 25) + 71 \cdot 10^{-6} \cdot (-40 - 25)^2)$$

[electrical_engineering_and_electronics:task_70jg4yzznocarsq_with_calculation](#)
[temperature dependent resistance, power, heat, exam ee1 ws2022](#)


Exercise E2 Pure Resistor Network Simplification
(written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall hold: $R_1 = 10 \text{ } \Omega$, $R_2 = 10 \text{ } \Omega$, $R_3 = 10 \text{ } \Omega$, $R_4 = 10 \text{ } \Omega$, $R_5 = 10 \text{ } \Omega$, $R_6 = 10 \text{ } \Omega$, $R_7 = 10 \text{ } \Omega$, $R_8 = 10 \text{ } \Omega$, $R_9 = 10 \text{ } \Omega$, $R_{10} = 10 \text{ } \Omega$, $R_{11} = 10 \text{ } \Omega$, $R_{12} = 10 \text{ } \Omega$, $R_{13} = 10 \text{ } \Omega$, $R_{14} = 10 \text{ } \Omega$, $R_{15} = 10 \text{ } \Omega$, $R_{16} = 10 \text{ } \Omega$, $R_{17} = 10 \text{ } \Omega$, $R_{18} = 10 \text{ } \Omega$, $R_{19} = 10 \text{ } \Omega$, $R_{20} = 10 \text{ } \Omega$.

Solution

$$R_{\text{eq}} = 13.8 \text{ } \Omega$$

Now a wye-delta transformation is necessary.

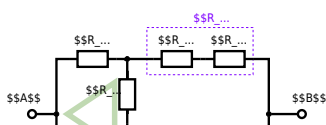

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:

$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$


The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel (R_Y + 100 \Omega)$$

$$R_{eq} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution



The equivalent resistor is given by a parallel configuration of resistors in series:


$$R_{\text{eq}} = (R_2 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega}$$

[electrical_engineering_and_electronics:task_x357drkaqv84jnsc_with_calculation_network_simplification,_exam_ee1_ws2022](#)

**Exercise E3 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result

$$U_{\text{S}} = U_{\text{AB}} = 4.5 \text{ V} \parallel R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

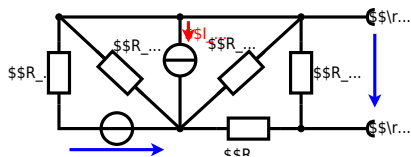


Calculate the internal resistance R_i and the source voltage U_s of an equivalent linear voltage source on the connectors A and B.

$R_1=5.0 \Omega$, $U_1=6.0 \text{ V}$, $R_2=10 \Omega$, $I_4=4.2 \text{ A}$,
 $R_3=10 \Omega$, $R_4=7.5 \Omega$, $R_5=15 \Omega$


Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

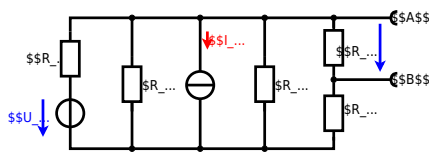


The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

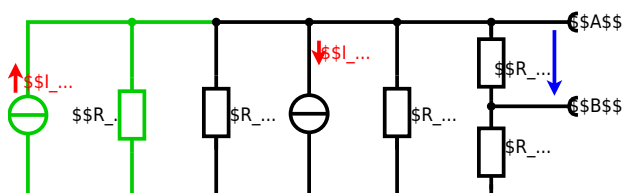

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in

parallel, like also I_2 and I_4 :
$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \left\{ \frac{U_2}{R_1} \right\} - I_4$$
 The resulting circuit can again be transformed:

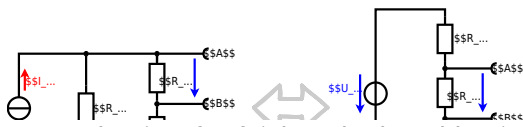

Here, the U_{24} is calculated by I_{24} as the following:
$$U_{24} = R_{135} \cdot I_{24} = \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:
$$U_{\text{AB}} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} = \left(\frac{U_2}{R_1} - I_4 \right) \cdot \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):
$$R_{\text{AB}} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5\Omega || 10\Omega || 10\Omega = 5\Omega || 5\Omega = 2.5\Omega$:

$$U_{\text{AB}} = \left(\frac{6.0\text{V}}{5.0\Omega} - 4.2\Omega \right) \cdot \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} || R_{\text{AB}} = 15\Omega || (7.5\Omega + 2.5\Omega)$$

[electrical_engineering_and_electronics:task_6tqtqtue1e2nf2c7_with_calculation](#)
 dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1
 ws2022

$$\frac{1}{2} \cdot U \cdot (1 - e^{-\frac{1}{\tau}}) \cdot \mu F$$

electrical_engineering_and_electronics:task_tb6pi8dgh0m2e2pw_with_calculation charging capacitors, dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1 ws2022

Exercise E4 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the effective value of the current $i(t)$ and the average power P in the circuit. The voltage $u(t)$ and the current $i(t)$ are given by $u(t) = 50 \sin(\omega t)$ V and $i(t) = 0.24 \cos(\omega t - \varphi_i)$ A. The effective value I_{eff} of the current $i(t)$ and the average power P shall be given.

After analysis, the following information should be extracted and given in phase notation: $Z = \frac{U}{I} = \frac{50 \text{ V}}{0.24 \text{ A}} = 208.33 \text{ } \Omega$ and $\varphi_i = \arctan\left(\frac{-4.68}{0.24}\right) = -10.9^\circ$

.. Calculate the physical values of the two components.
 Solution: $R = \frac{U}{I} \cos(\varphi) = \frac{50}{0.24} \cos(-10.9^\circ) = 200 \text{ } \Omega$ and $X_L = \frac{U}{I} \sin(\varphi) = \frac{50}{0.24} \sin(-10.9^\circ) = -4.68 \text{ } \Omega$

Solution

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \text{ V}}{208.33 \text{ } \Omega} = 0.24 \text{ A}$$
 The current and voltage are in phase and their effective value is $I_{eff} = 0.24 \text{ A}$ and $P = I_{eff}^2 R = 0.24^2 \cdot 200 = 23.04 \text{ W}$
 Therefore, the effective value of the current is $I_{eff} = 0.24 \text{ A}$ and the average power is $P = 23.04 \text{ W}$
 Impedance: $\underline{Z} = \frac{\underline{U}}{\underline{I}} = \frac{50 \text{ V}}{0.24 \text{ A}} = 208.33 \text{ } \Omega$

$$\underline{Z} = R + jX_L = 200 \text{ } \Omega + j4.68 \text{ } \Omega$$
 The effective value of the current is $I_{eff} = 0.24 \text{ A}$ and the average power is $P = 23.04 \text{ W}$
 With the complex part comes the physical value $I_{eff} = 0.24 \text{ A}$ and $P = 23.04 \text{ W}$

$$I_{eff} = \frac{U_{eff}}{\sqrt{2} \cdot I_{eff}} \Rightarrow I_{eff} = \frac{50}{\sqrt{2} \cdot 0.24} = 109.1 \text{ V}$$

$$P = \frac{U_{eff} \cdot I_{eff} \cdot \cos(\varphi)}{2} = \frac{50 \cdot 0.24 \cdot \cos(-10.9^\circ)}{2} = 23.04 \text{ W}$$

electrical_engineering_and_electronics:task_jti0uzudcmg4u22t_with_calculation complex impedance, exam ee1 ws2022

Exercise E1 Impedances at different Frequencies

(written test, approx. 18 % of a 60-minute written test, WS2022)

2. A series circuit contains a resistor with $R = 4.7 \text{ k}\Omega$, an inductor with $L = 470 \text{ }\mu\text{H}$, and a capacitor with $C = 47 \text{ nF}$. The source voltage is $v(t) = 3.0 \sin(2\pi \cdot 15 \text{ kHz} \cdot t)$ V. The average power is $P = 10 \text{ mW}$.
 Result: $R = 4.7 \text{ k}\Omega$, $L = 470 \text{ }\mu\text{H}$, $C = 47 \text{ nF}$, $f = 15 \text{ kHz}$, $V_{\text{eff}} = 1.60 \text{ V}$.
 The resistor R_1 shall have the same absolute value of the impedance as a capacitor $C_1 = 40 \text{ nF}$ at $f = 4 \text{ MHz}$.

Solution

$$R_1 = 1.00 \text{ }\Omega$$

$$R_2 = 10.0 \text{ }\Omega$$

A series circuit means that the current is constant on every component.
 The equivalent impedance for R and L combined is given by $Z_{RL} = R + j\omega L$
 Parallel circuit means that the voltage is the same on R_1 and C_1 $V_{R1} = V_{C1}$

$$I_{R1} = \frac{V_{R1}}{R_1} = \frac{V_{C1}}{1/(j\omega C_1)} = j\omega C_1 V_{C1}$$

 This can be simplified to $I_{R1} = j\omega C_1 V_{R1}$

$$I_{R1} = j\omega C_1 R_1 I_{R1}$$

 This is perpendicular to V_{R1} $I_{R1} \perp V_{R1}$

$$I_{R2} = \frac{V_{R2}}{R_2} = \frac{V_{R1}}{R_2}$$

 Therefore, the resulting current of the parallel circuit is given as:

$$I_{R3} = I_{R1} + I_{R2}$$

 This can be written as $I_{R3} = I_{R2} \sqrt{1 + (\omega C_1 R_1)^2}$

$$I_{R3} = \frac{V_{R1}}{R_2} \sqrt{1 + (\omega C_1 R_1)^2}$$

 Back to the first formula:
$$P = I_{R3}^2 R_1 = \left(\frac{V_{R1}}{R_2} \sqrt{1 + (\omega C_1 R_1)^2} \right)^2 R_1$$

$$P = \frac{V_{R1}^2}{R_2^2} \frac{R_1 (1 + (\omega C_1 R_1)^2)}{R_1}$$

$$P = \frac{V_{R1}^2}{R_2^2} (1 + (\omega C_1 R_1)^2)$$

[electrical_engineering_and_electronics:task_pdkgtyexxy1ktu3_with_calculation](#)
[complex impedance, exam ee1 ws2022](#)

Exercise E1 Complex Impedance Circuit

(written test, approx. 15 % of a 60-minute written test, WS2022)

1. Draw the circuit diagram of the given circuit. The source voltage is $v(t) = 3.0 \sin(2\pi \cdot 15 \text{ kHz} \cdot t)$ V. The average power is $P = 10 \text{ mW}$.
 Result: $R = 4.7 \text{ k}\Omega$, $L = 470 \text{ }\mu\text{H}$, $C = 47 \text{ nF}$, $f = 15 \text{ kHz}$, $V_{\text{eff}} = 1.60 \text{ V}$.

Solution

Result


$$Z = 19.8 \text{ }\Omega$$

Draw the circuit diagram of the given circuit.
 Label the components, voltages, and currents.

$$Z = \frac{U}{I}$$

$$\frac{10 \text{ mW}}{0.22 \text{ A}} = \frac{U}{0.22 \text{ A}}$$

$$U = 0.22 \text{ A} \cdot 19.8 \text{ }\Omega = 4.356 \text{ V}$$

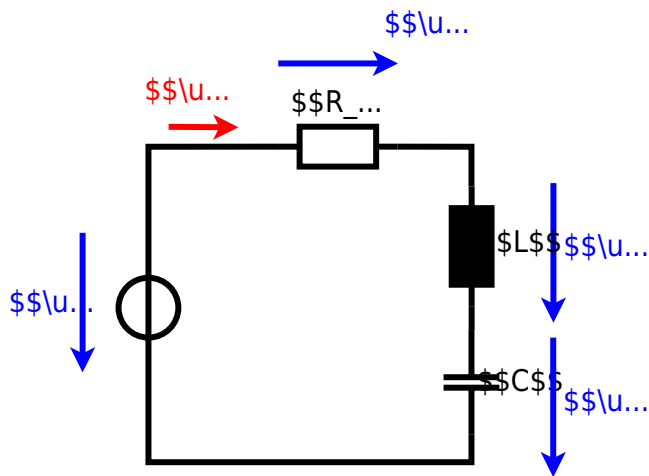

electrical_engineering_and_electronics:task_kricv9fh7haauo6q_with_calculation
complex impedance, exam ee1 ws2022

From:

<https://wiki.mexle.org/> - **MEXLE Wiki**

Permanent link:

https://wiki.mexle.org/electrical_engineering_and_electronics_1/ws2022_exam?rev=1768173747

Last update: **2026/01/12 00:22**

