

task_kricv9fh7haauo6q_with_calculation

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	2
--	---

complex impedance, exam ee1 WS2022

Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

1. Calculate the circuit impedance Z for the circuit shown in the figure. The circuit consists of a linear source connected with an inductor of $330 \mu\text{H}$ and a capacitor of $0.22 \mu\text{F}$, all in series.

Solution: The circuit impedance Z is the sum of the impedances of the inductor and the capacitor. The impedance of the inductor is $Z_L = j\omega L$ and the impedance of the capacitor is $Z_C = -j/\omega C$. The total impedance is $Z = Z_L + Z_C = j\omega L - j/\omega C$.


Result: $Z = 19.8 \Omega$. Draw the circuit diagram of the given circuit and label all components, voltages, and currents.

$$Z = \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \quad Z_C = \frac{1}{2\pi \cdot f \cdot C} = \frac{1}{2\pi \cdot 15 \text{ kHz} \cdot 0.22 \mu\text{F}}$$

$$Z_L = \omega L = 2\pi \cdot f \cdot L = 2\pi \cdot 15 \text{ kHz} \cdot 330 \mu\text{H}$$

$$Z = \sqrt{Z_L^2 + Z_C^2} = \sqrt{(2\pi \cdot 15 \text{ kHz} \cdot 330 \mu\text{H})^2 + (\frac{1}{2\pi \cdot 15 \text{ kHz} \cdot 0.22 \mu\text{F}})^2}$$

$$\underline{Z} = R + \underline{Z}_L + \underline{Z}_C = R + j \cdot \underline{Z}_L - j \cdot \underline{Z}_C \quad |\underline{Z}| = \sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2}$$

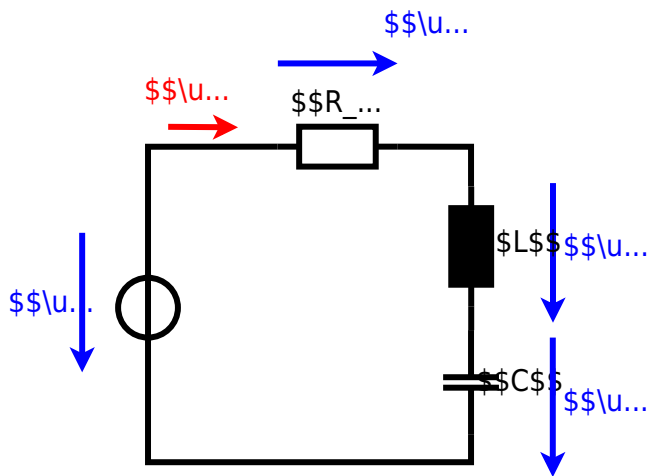

From:
<https://wiki.mexle.org/> - **MEXLE Wiki**

Permanent link:
https://wiki.mexle.org/ee1/task_kricv9fh7haauo6q_with_calculation

Last update: **2023/04/02 00:27**

