

task_kricv9fh7haauo6q_with_calculation

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exercise E10 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	2
---	---

complex impedance, exam ee1 WS2022

Exercise E10 Complex Impedance Circuit
(written test, approx. 15 % of a 60-minute written test, WS2022)

1. Calculate the circuit impedance Z for a series circuit. The circuit consists of a linear source connected with an inductor of $330 \mu\text{H}$ and a capacitor of $0.22 \mu\text{F}$, all in series.

The voltage source is $u(t) = 3.0 \sin(2\pi \cdot 15 \cdot 10^3 t) \text{ V}$.
 Solution: $Z = 19.8 - j31.4 \Omega$

Draw the circuit diagram of the given circuit and label all components, voltages, and currents.

$$Z = \frac{U}{I} \quad I = \frac{U}{Z} \quad Z_C = \frac{1}{j\omega C} = \frac{1}{j \cdot 2\pi \cdot 15 \cdot 10^3 \cdot 0.22 \cdot 10^{-6}}$$


$$Z_L = j\omega L = j \cdot 2\pi \cdot 15 \cdot 10^3 \cdot 330 \cdot 10^{-6}$$

$$Z = R + Z_L + Z_C = R + j\omega L - \frac{1}{j\omega C}$$

$$Z = R + j(\omega L - \frac{1}{\omega C})$$

$$|Z| = \sqrt{R^2 + (\omega L - \frac{1}{\omega C})^2}$$



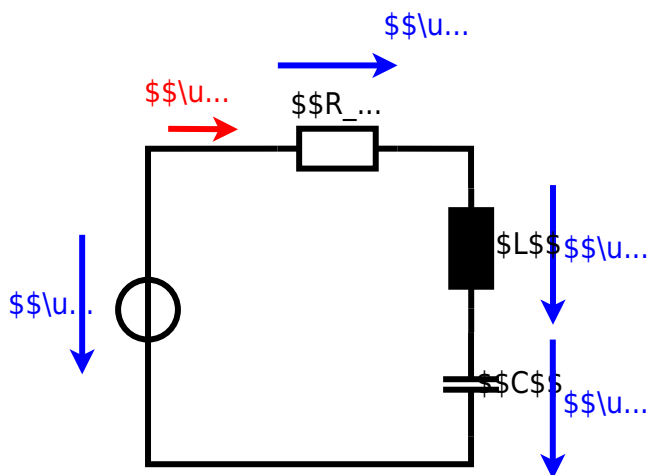

From:

<https://wiki.mexle.org/> - **MEXLE Wiki**

Permanent link:

https://wiki.mexle.org/ee1/task_kricv9fh7haauo6q_with_calculation

Last update: **2023/04/02 00:27**

