

# task\_7el8zljglaazxtw\_with\_calculation

## Student Group

First Name	Surname	Matrikel Nr.

## Table of Contents

Exercise E1 Series Resonant Circuit (written test, approx. 10 % of a 120-minute written test, SS2022) .....	2
-------------------------------------------------------------------------------------------------------------	---

resonant circuit, exam ee2 SS2022

**Exercise E1 Series Resonant Circuit**  
**(written test, approx. 10 % of a 120-minute written test, SS2022)**

2. What is the resonance frequency of the circuit shown in the figure on the right on the capacitor? What is the value of the real impedance  $Z_{RLC}$  of the inductor  $L$ .

At this case, shall be given with the following values:  $f_0 = 100 \text{ MHz}$  would be  $X_{C0} = Z_{RLC}$ . Which value would  $C_0$  have for the given  $f_0$ ?

Path:  $C = 10 \text{ nF}$

$R = 88.6 \text{ m}\Omega$

Path:  $L = 60 \text{ pH}$

$R = 88.6 \text{ m}\Omega$


The resonance frequency is given as  $f_r = \frac{1}{2\pi\sqrt{LC}}$   $\Leftrightarrow f_r = \frac{1}{2\pi\sqrt{60 \cdot 10^{-12} \cdot 10 \cdot 10^{-9}}}$

What is the real impedance of the  $Z_{RLC}$  has to be set to  $25.5 \text{ m}\Omega$   $(R)$

$Z_{RLC} = R + j(X_L - X_C) \Leftrightarrow Z_{RLC} = R \Leftrightarrow R = 25.5 \text{ m}\Omega$

At resonance the impedance is given purely by the resistor.

With values:  $C = \frac{1}{2\pi \cdot 100 \cdot 10^6 \cdot 25.5 \cdot 10^{-3}} = 10.6 \text{ nF}$

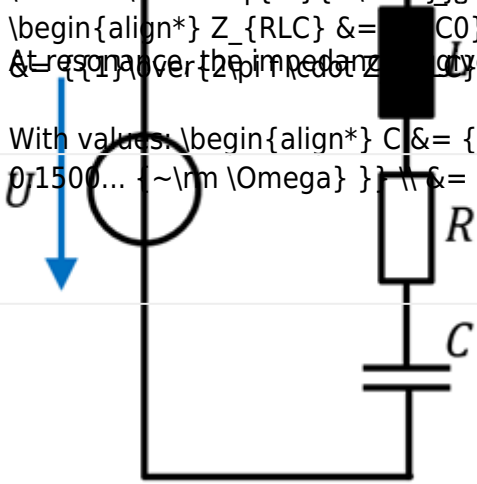

1. What is the impedance  $Z_{RLC}$  of this real capacitor for  $f_0 = 100 \text{ MHz}$ ? (Phase and magnitude)

Path

The impedance  $Z_{RLC}$  is given by:  $Z_{RLC} = R + j\omega L - \frac{j}{\omega C} = R + j(\omega L - \frac{1}{\omega C})$

Putting in the numbers, only for the reactive part  $X_{LC}$ :  $X_{LC} = 2\pi \cdot 100 \cdot 10^6 \cdot 60 \cdot 10^{-12} - \frac{1}{2\pi \cdot 100 \cdot 10^6 \cdot 10 \cdot 10^{-9}} = -121.45 \text{ m}\Omega$

With the real and imaginary parts, we can derive the magnitude and phase:

$$Z_{RLC} = \sqrt{R^2 + X_{LC}^2} \quad \text{and} \quad \sqrt{(88 \text{ m}\Omega)^2 + (-121.45 \text{ m}\Omega)^2} = 150.0... \text{ m}\Omega$$

$$\varphi = \arctan\left(\frac{X_{LC}}{R}\right) = \arctan\left(\frac{-121.45 \text{ m}\Omega}{88 \text{ m}\Omega}\right) = -0.9437... = -54.07...^\circ$$

From:

<https://wiki.mexle.org/> - MEXLE Wiki

Permanent link:

[https://wiki.mexle.org/ee2/task\\_7e18zljglaazxtw\\_with\\_calculation?rev=1720138828](https://wiki.mexle.org/ee2/task_7e18zljglaazxtw_with_calculation?rev=1720138828)

Last update: **2024/07/05 02:20**

