

task_kricv9fh7haauo6q_with_calculation

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exercise E1.1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	2
--	---

complex impedance, exam ee1 WS2022

Exercise E1.1 Complex Impedance Circuit
(written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the circuit impedance Z for the circuit shown in the figure. The source voltage is $u(t) = 3.0 \sin(2\pi \cdot 15 \cdot t)$ V. The circuit consists of an inductor of $330 \mu\text{H}$ and a capacitor of $0.22 \mu\text{F}$, all in series.

Solution
 The linear source is connected with an inductor of $330 \mu\text{H}$ and a capacitor of $0.22 \mu\text{F}$, all in series.

Result
 $Z = 19.8 - j31.1 \Omega$

Solution
 Draw the circuit diagram of the given circuit and label all components, voltages, and currents.

$$Z = \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \quad \hat{U} = \hat{I} \cdot Z$$

$$Z_C = \frac{1}{j\omega C} = \frac{1}{j \cdot 2\pi \cdot 15 \cdot 0.22 \cdot 10^{-6}} = -j148 \Omega$$

Result
 $Z = 19.8 - j31.1 \Omega$

$$\underline{Z} = R + \underline{Z}_L + \underline{Z}_C = R + j\omega L - j \frac{1}{\omega C}$$

$$\underline{Z} = R + j \cdot 2\pi \cdot 15 \cdot 330 \cdot 10^{-6} - j \frac{1}{2\pi \cdot 15 \cdot 0.22 \cdot 10^{-6}}$$

$$\underline{Z} = R + j \cdot 3.11 - j148$$

$$\underline{Z} = R - j144.89$$


$$\underline{Z} = R + \underline{Z}_L + \underline{Z}_C \quad \underline{Z} = R + j\omega L - j \frac{1}{\omega C}$$

$$\underline{Z} = R + j \cdot 2\pi \cdot 15 \cdot 330 \cdot 10^{-6} - j \frac{1}{2\pi \cdot 15 \cdot 0.22 \cdot 10^{-6}}$$

$$\underline{Z} = R + j \cdot 3.11 - j148$$

$$\underline{Z} = R - j144.89$$



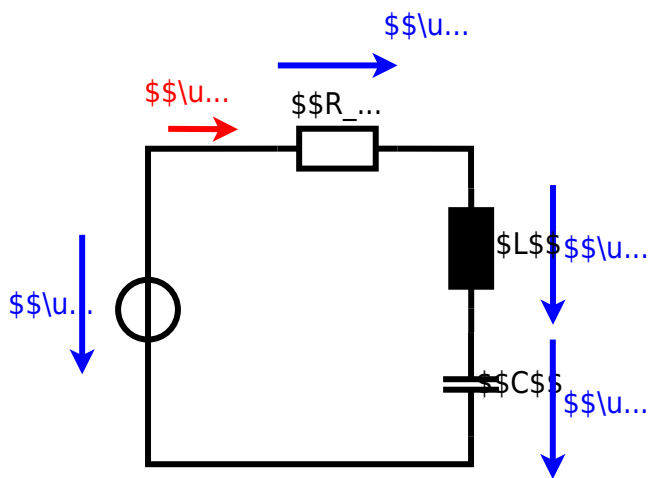

From:
<https://wiki.mexle.org/> - **MEXLE Wiki**

Permanent link:
https://wiki.mexle.org/electrical_engineering_1/task_kricv9fh7haauo6q_with_calculation?rev=1680159442

Last update: **2023/03/30 08:57**

