

# task\_kricv9fh7haauo6q\_with\_calculation

## Student Group

First Name	Surname	Matrikel Nr.

## Table of Contents

Exercise E1.1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) .....	2
--	---

complex impedance, exam ee1 WS2022

**Exercise E1.1 Complex Impedance Circuit**  
**(written test, approx. 15 % of a 60-minute written test, WS2022)**

1. Calculate the circuit impedance  $Z$  for the circuit shown in Fig. 1. The circuit has a voltage source  $u(t) = 3.0 \sin(2\pi \cdot 15 \cdot t) \text{ V}$  in series with a resistor of  $10 \text{ }\Omega$ , an inductor of  $330 \text{ }\mu\text{H}$ , and a capacitor of  $0.22 \text{ }\mu\text{F}$ , all in series.

**Solution**  
 The linear source is connected with an inductor of  $330 \text{ }\mu\text{H}$  and a capacitor of  $0.22 \text{ }\mu\text{F}$ , all in series.

**Result**  
 $Z = 10 + j31.1 \text{ }\Omega$  and  $|Z| = 48.2 \text{ }\Omega$

Draw the circuit diagram of the given circuit and label all components, voltages, and currents.

$$Z = \frac{U}{I} \quad I = \frac{U}{Z} \quad Z_C = \frac{1}{2\pi \cdot f \cdot C} \quad \omega = 2\pi \cdot f$$


$$Z_L = j\omega L = j2\pi \cdot 15 \cdot 330 \cdot 10^{-6} = j31.1 \text{ }\Omega$$

$$Z_C = \frac{1}{j\omega C} = \frac{1}{j2\pi \cdot 15 \cdot 0.22 \cdot 10^{-6}} = -j152.8 \text{ }\Omega$$

$$\underline{Z} = R + \underline{Z}_L + \underline{Z}_C = 10 + j31.1 - j152.8 = 10 - j121.7 \text{ }\Omega$$

$$|\underline{Z}| = \sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2} = \sqrt{10^2 + (-121.7)^2} = 122.2 \text{ }\Omega$$



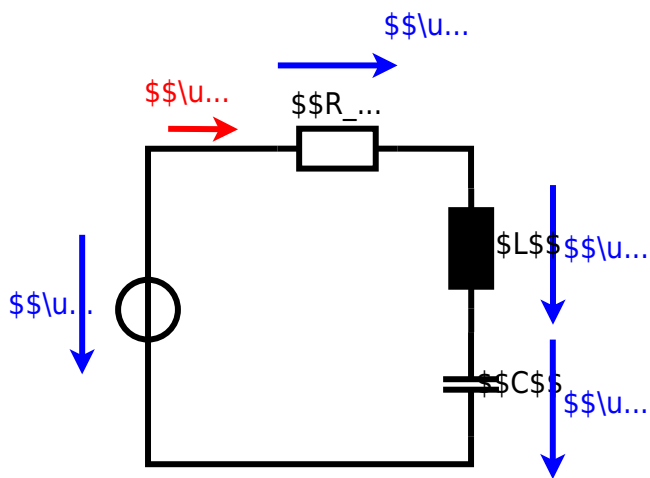

From:  
<https://wiki.mexle.org/> - **MEXLE Wiki**

Permanent link:  
[https://wiki.mexle.org/electrical\\_engineering\\_1/task\\_kricv9fh7haauo6q\\_with\\_calculation?rev=1680242172](https://wiki.mexle.org/electrical_engineering_1/task_kricv9fh7haauo6q_with_calculation?rev=1680242172)

Last update: **2023/03/31 07:56**

