

task_kricv9fh7haauo6q_with_calculation

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	2
--	---

complex impedance, exam ee1 WS2022

Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the circuit impedance Z for the circuit shown in the figure. The circuit consists of a linear source connected with an inductor of $330 \mu\text{H}$ and a capacitor of $0.22 \mu\text{F}$, all in series.

The voltage source is $u(t) = 3.0 \sqrt{2} \sin(2\pi \cdot 15 \cdot 10^3 t) \text{ V}$. The angular frequency is $\omega = 15 \cdot 10^3 \text{ rad/s}$.

Draw the circuit diagram of the given circuit and label all components, voltages, and currents.

$$Z = \frac{\hat{U}}{\hat{I}} \quad \underline{Z} = R + j\underline{Z}_L - j\underline{Z}_C$$


$$\underline{Z}_L = j\omega L = j \cdot 15 \cdot 10^3 \cdot 330 \cdot 10^{-6} = j495 \Omega$$

$$\underline{Z}_C = -j \frac{1}{\omega C} = -j \frac{1}{15 \cdot 10^3 \cdot 0.22 \cdot 10^{-6}} = -j303 \Omega$$

$$\underline{Z} = R + j\underline{Z}_L - j\underline{Z}_C = 100 \Omega + j495 \Omega - j303 \Omega = 100 \Omega + j192 \Omega$$

$$|\underline{Z}| = \sqrt{R^2 + \underline{Z}_L^2 - \underline{Z}_C^2} = \sqrt{100^2 + 192^2} = 214 \Omega$$

$$\arg(\underline{Z}) = \arctan\left(\frac{\underline{Z}_L - \underline{Z}_C}{R}\right) = \arctan\left(\frac{192}{100}\right) = 1.107 \text{ rad} = 63.1^\circ$$

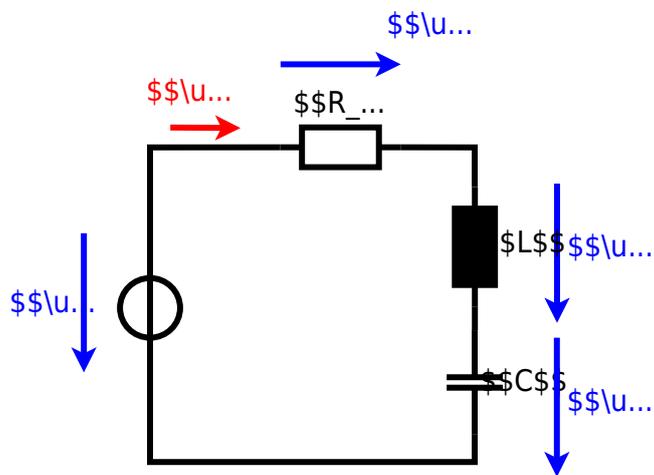

From:
<https://wiki.mexle.org/> - **MEXLE Wiki**

Permanent link:
https://wiki.mexle.org/electrical_engineering_and_electronics/task_kricv9fh7haauo6q_with_calculation

Last update: **2023/04/02 00:27**

