

# Triangle-to-Rectangular Conversion - Schmitt Trigger

## Student Group

| First Name | Surname | Matrikel Nr. |
|------------|---------|--------------|
|            |         |              |
|            |         |              |
|            |         |              |

## Table of Contents

*Triangle-to-Rectangular Conversion - Schmitt Trigger*

.....

2

Background Information

.....

2

Experimental Tasks

.....

3

Test Questions - Schmitt Trigger


.....

7

# Triangle-to-Rectangular Conversion - Schmitt Trigger

## Background Information

The operation of an OPV in the saturation range can be enforced in the circuit by feeding back the output signal, i.e., returning it to the non-inverting input (+ input). In the circuit shown, the feedback is provided by resistor  $R_2$ .

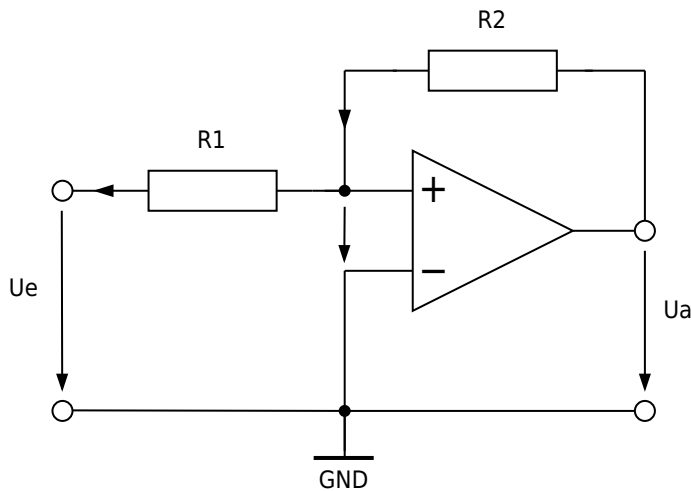


Text is not SVG - cannot display

The output voltage  $u_{\mathrm{a}}$  can only take two values, either  $U_{\mathrm{sat}}$  or  $-U_{\mathrm{sat}}$ . It switches between these two values when no voltage drops at the differential input of the OPV, ( $u_{\mathrm{d}}=0$ ). Then


$i_{\mathrm{R2}} = \frac{u_{\mathrm{a}}}{R_{\mathrm{2}}}$  and  $u_{\mathrm{e}} = -R_{\mathrm{1}} \cdot i_{\mathrm{R1}}$ . Since the OPV input current is  $i_{\mathrm{p}}=0$ , the currents through the resistors must be equal, and the following relationship applies for the switching points:

$$u_{\mathrm{e}} = -\frac{R_{\mathrm{1}}}{R_{\mathrm{2}}} \cdot u_{\mathrm{a}}$$

$$u_{\mathrm{a}} = \mp \frac{R_{\mathrm{1}}}{R_{\mathrm{2}}} \cdot U_{\mathrm{sat}}$$

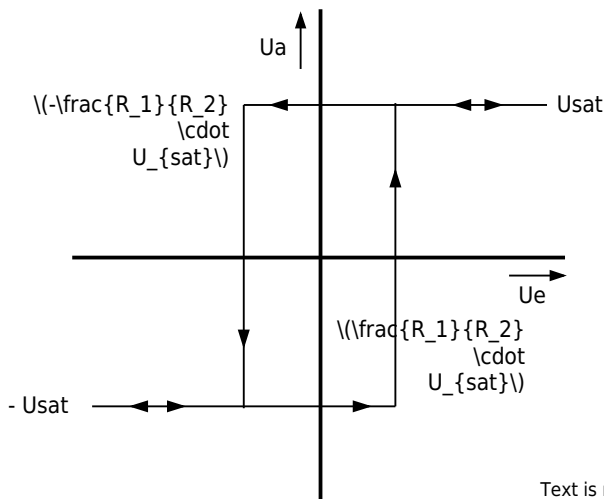


Text is not SVG - cannot display

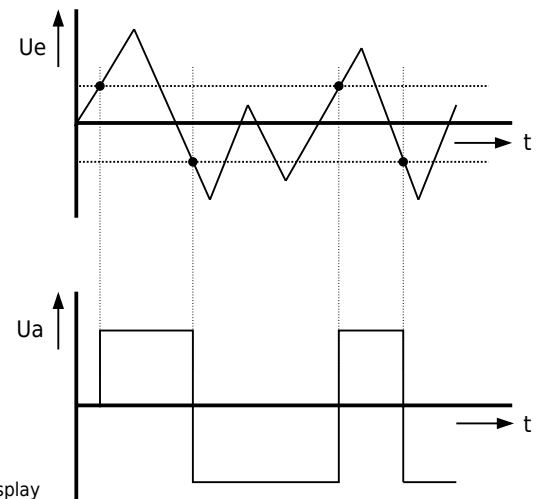

The image shows the input/output characteristic curve of the circuit known as a “non-inverting Schmitt trigger.” The reaction to any input signal is shown on the right. The circuit only switches to  $U_{sat}$ , when the positive switching threshold at the input is reached. It only switches to  $-U_{sat}$ , when the negative switching threshold at the input is reached.

## Experimental Tasks

To analyze the behavior of the schmitt trigger, the following circuit is used:

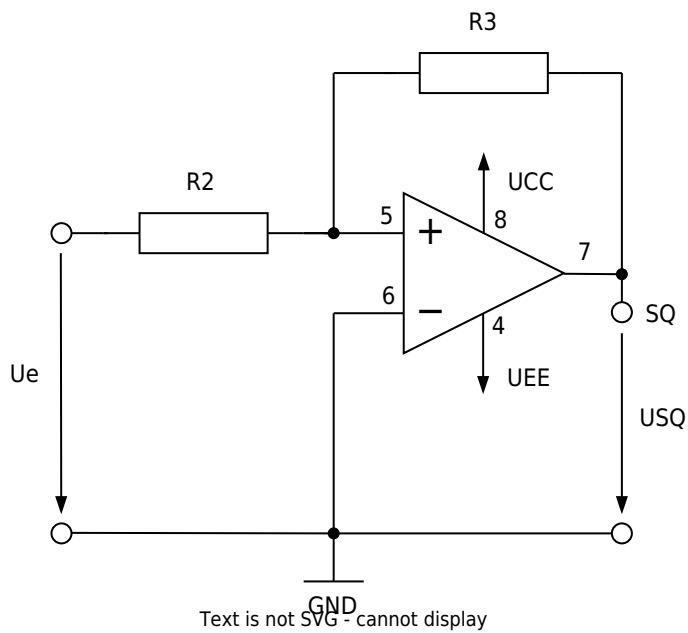

Supply voltages (from power supply unit):


$U_{CC} = +3V$ ,  $U_{EE} = -3V$

Values of the components used:

$R_2 = 20k\Omega$ ,  $R_3 = 27k\Omega$

- Calculate the switching thresholds using the given values. - Roughly sketch the voltage curves that you expect at the SQ output when you apply a triangular signal to  $U_e$  whose amplitude just reaches the switching points.

### Output SQ

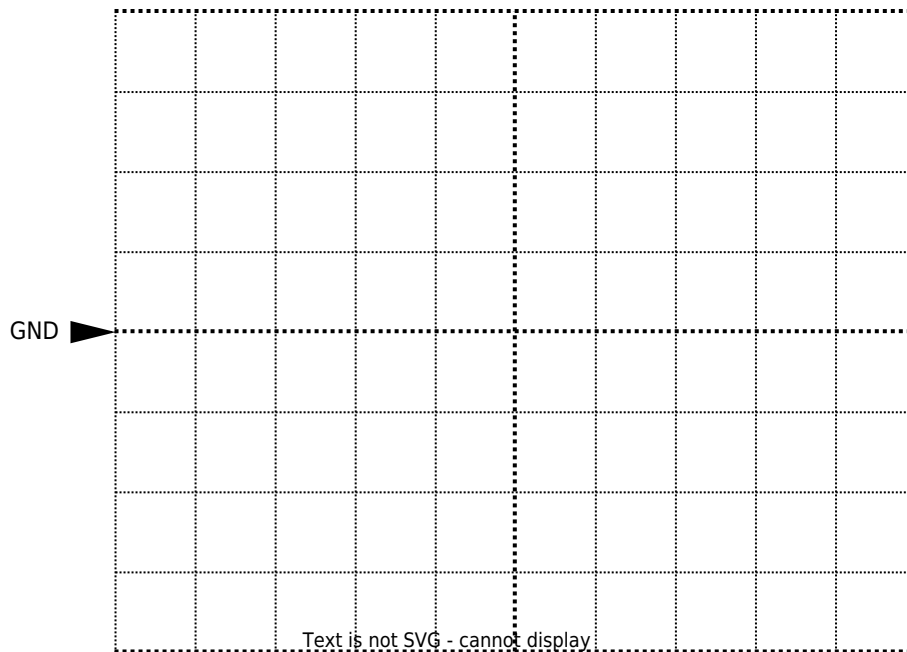


Channel 1:  $\frac{\text{Volt}}{\text{Div}} = \$$

Time basis:  $\frac{T}{\text{Div}} = \$$

- Set up the Schmitt Trigger on the MEXLE-Board. **Please use the level shifting circuit at the input of the circuit.** Perform the following measurements on the Schmitt Trigger: \* Connect channel 1 on the oscilloscope to  $\square\square$  and channel 2 to SQ. \* Connect the function generator to the Ue input. Set it to triangle with a frequency of 1kHz and a voltage of 3 V (amplitude). \* Sketch the oscilloscope screen image.

**Ue = 3 V (amplitude), f = 1 kHz**

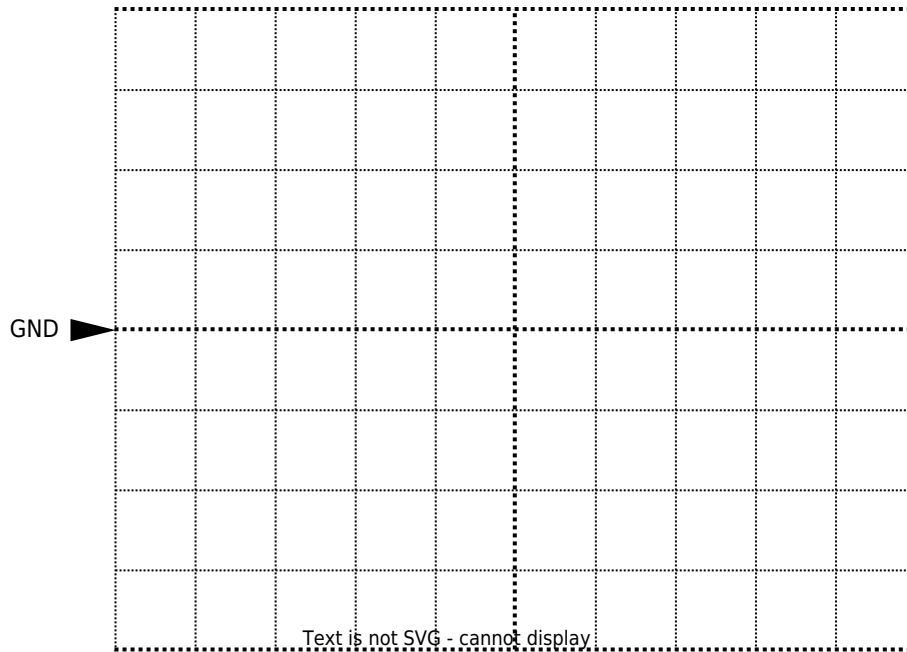


Channel 1:  $\frac{\text{Volt}}{\text{Div}} = \$$

Channel 2:  $\frac{\text{Volt}}{\text{Div}} = \$$

Time basis:  $\frac{T}{\text{Div}} = \$$

- Sketch the oscilloscope screen image you would expect for 1 V (amplitude).

**U<sub>e</sub> = 1 V (amplitude), f = 1 kHz**

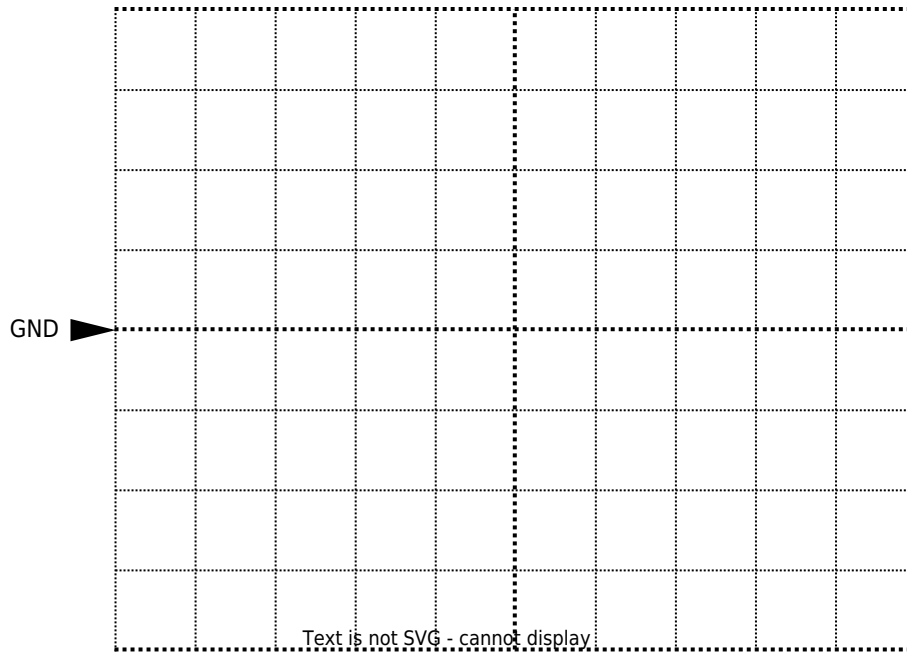

Channel 1:  $\frac{\text{Volt}}{\text{Div}} = \$$

Channel 2:  $\frac{\text{Volt}}{\text{Div}} = \$$

Time basis:  $\frac{T}{\text{Div}} = \$$

- Compare your measurements with the calculation from sub-task 1 and the forecast from 2. Explain the results.

## Test Questions - Schmitt Trigger

From:

<https://wiki.mexle.org/> - MEXLE Wiki

Permanent link:

[https://wiki.mexle.org/mexlefirst\\_public/triangle-to-rectangular\\_conversion\\_schmitt\\_trigger?rev=1785919647](https://wiki.mexle.org/mexlefirst_public/triangle-to-rectangular_conversion_schmitt_trigger?rev=1785919647)

Last update: 2026/08/05 10:47

